

# CLC401

## Fast Settling, Wideband High-Gain Monolithic Op Amp

### General Description

The CLC401 is a wideband, fast-settling op amp designed for applications requiring gains greater than  $\pm 7$ . Constructed using an advanced complementary bipolar process and a proprietary design, the CLC401 features dynamic performance far beyond that of typical high-speed monolithic op amps. For example, at a gain of  $+20$ , the  $-3\text{dB}$  bandwidth is  $150\text{MHz}$  and the rise/fall time is only  $2.5\text{ns}$ .

The wide bandwidth and linear phase ( $0.2^\circ$  deviation from linear at  $50\text{MHz}$ ) and a very flat gain response makes the CLC401 ideal for many digital communication system applications. For example, demodulators need both DC coupling and high-frequency amplification – requirements that are ordinarily difficult to meet.

The very fast  $10\text{ns}$  settling to  $0.1\%$  and the ability to drive capacitive loads lend themselves well to flash A/D applications. Systems employing D/A converters also benefit from the settling time and also by the fact that current-to-voltage transimpedance amplification is easily accomplished.

The CLC401 provides a quick, effective design solution. Its stable operation over the entire  $\pm 7$  to  $\pm 50$  gain range precludes the need for external compensation. And, unlike many other high-speed op amps, the CLC401's power dissipation of  $150\text{mW}$  is compatible with designs which must limit total power dissipation or power supply requirements.

The CLC401 is based on National's proprietary op amp topology that uses current feedback instead of the usual voltage feedback. This unique design has many advantages over conventional designs (such as settling time that is relatively independent of gain), yet it is used in basically the same way (see the gain equations in Figures 1 and 2, page 4). How-

(Continued on page 4)

The CLC401 is available in several versions to meet a variety of requirements. A three-letter suffix determines the version:

CLC401AJP	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	8-pin plastic DIP
CLC401AJE	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	8-pin plastic SOIC
CLC401A8B	$-55^\circ\text{C}$ to $+125^\circ\text{C}$	8-pin hermetic CERDIP, MIL-STD-883C, Level B

DESC SMD number: 5962-89973




### Features

- $-3\text{dB}$  bandwidth of  $150\text{MHz}$
- $0.1\%$  settling in  $10\text{ns}$
- Low power,  $150\text{mW}$
- Overload and short circuit protected
- Stable without compensation
- Recommended gain range,  $\pm 7$  to  $\pm 50$

### Applications

- Flash, precision A/D conversion
- Photodiode, CCD preamps
- IF processors
- High-speed modems, radios
- Line drivers
- DC-coupled log amplifiers
- High-speed communications

Pulse Response

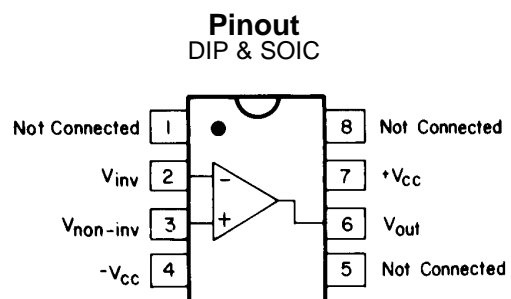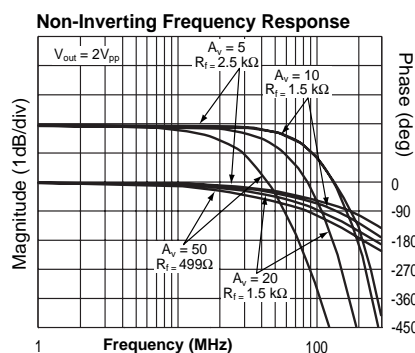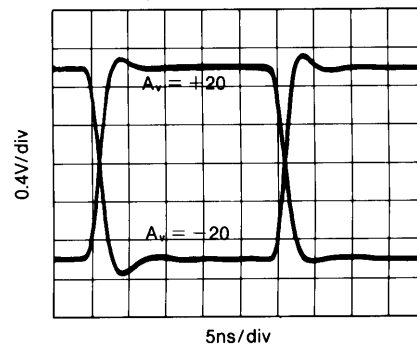

# CLC401 Electrical Characteristics ( $A_v = +20$ , $V_{cc} = \pm 5V$ , $R_L = 100\Omega$ , $R_f = 1.5k\Omega$ ; unless specified)

PARAMETERS	CONDITIONS	TYP	MAX & MIN RATINGS			UNITS	SYMBOL
			-40°C	+25°C	+85°C		
Ambient Temperature	CLC401AJ	+25°C	-40°C	+25°C	+85°C		
<b>FREQUENCY DOMAIN RESPONSE</b>							
-3dB bandwidth	$V_{out} < 2V_{pp}$	150	>100	>100	>70	MHz	SSBW
gain flatness	$V_{out} < 5V_{pp}$	100	>65	>65	>55	MHz	LSBW
peaking	$V_{out} < 2V_{pp}$	0	<0.1	<0.1	<0.1	dB	GFPL
peaking	<25MHz	0	<0.2	<0.2	<0.2	dB	GFPH
rolloff	<50MHz	0.2	<1.0	<1.0	<1.3	dB	GFR
linear phase deviation	DC to 50MHz	0.2	<1.0	<1.0	<1.5	°	LPD
<b>TIME DOMAIN RESPONSE</b>							
rise and fall time	2V step	2.5	<3.5	<3.5	<5.0	ns	TRS
	5V step	5	<7.0	<7.0	<8.0	ns	TRL
settling time to $\pm 0.1\%$	2V step	10	<15	<15	<15	ns	TS
overshoot	2V step	0	<10	<10	<10	%	OS
slew rate		1200	>800	>800	>700	V/ $\mu$ s	SR
<b>DISTORTION AND NOISE RESPONSE</b>							
2nd harmonic distortion	$2V_{pp}$ , 20MHz	-45	<-35	<-35	<-35	dBc	HD2
3rd harmonic distortion	$2V_{pp}$ , 20MHz	-60	<-50	<-50	<-45	dBc	HD3
equivalent input noise							
noise floor	>1MHz	-158	<-155	<-155	<-154	dBm(1Hz)	SNF
integrated noise	1MHz to 150MHz	35	<50	<50	<55	$\mu$ V	INV
<b>STATIC, DC PERFORMANCE</b>							
*input offset voltage		3	$\pm 10.0$	$\pm 6.0$	$\pm 11.0$	mV	VIO
average temperature coefficient		20	$\pm 50$	—	$\pm 50$	$\mu$ V/ $^{\circ}$ C	DVIO
*input bias current	non-inverting	10	$\pm 36$	$\pm 20$	$\pm 20$	$\mu$ A	IBN
average temperature coefficient		100	$\pm 200$	—	$\pm 100$	nA/ $^{\circ}$ C	DIBN
*input bias current	inverting	10	46	30	40	$\mu$ A	IBI
average temperature coefficient		100	$\pm 200$	—	$\pm 100$	nA/ $^{\circ}$ C	DIBI
power supply rejection ratio		55	50	50	50	dB	PSRR
common mode rejection ratio		55	50	50	50	dB	CMRR
*supply current	no load	15	21	21	21	mA	ICC
<b>MISCELLANEOUS PERFORMANCE</b>							
non-inverting input	resistance	200	>50	>100	>100	k $\Omega$	RIN
	capacitance	0.5	<2.5	<2.5	<2.5	pF	CIN
output impedance	at DC	0.2	<0.3	<0.3	<0.3	$\Omega$	RO
output voltage range	no load	3.5	>3.0	>3.2	>3.2	V	VO
common mode input range	for rated performance	2.8	>2.0	>2.5	>2.5	V	CMIR
output current		60	>35	>50	>50	mA	IO

Min/max ratings are based on product characterization and simulation. Individual parameters are tested as noted. Outgoing quality levels are determined from tested parameters.

## Absolute Maximum Ratings

$V_{cc}$	$\pm 7V$
$I_{out}$	output is short circuit protected to ground, but maximum reliability will be maintained if $I_{out}$ does not exceed... 60mA
common mode input voltage	$\pm V_{cc}$
differential input voltage	5V
junction temperature range	+150°C
operating temperature range	
AJ:	-40°C to +85°C
storage temperature range	-65°C to +150°C
lead solder duration (+300°C)	10 sec

## Miscellaneous Ratings

recommended gain range: +7 to +50, -1 to -50

NOTES: \* AJ 100% tested at +25°C.

## Package Thermal Resistance

Package	$\theta_{JC}$	$\theta_{JA}$
AJP	70°C/W	125°C/W
AJE	65°C/W	145°C/W


## Reliability Information

Transistor count


28

# CLC401 Typical Performance Characteristics ( $T_A = 25^\circ$ , $A_V = +20$ , $V_{CC} = \pm 5V$ , $R_L = 100\Omega$ ; unless specified)


**Non-Inverting Frequency Response**

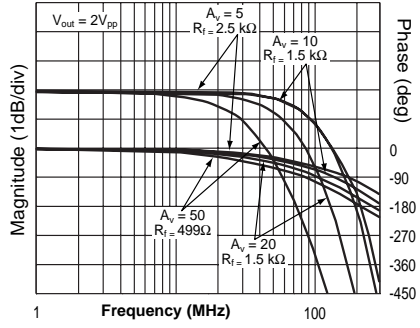


**Inverting Frequency Response**

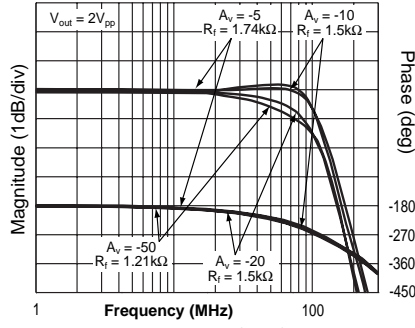


**Frequency Response for Various  $R_L$ s**

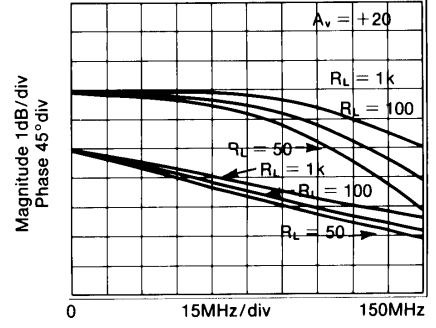


**Open-Loop Transimpedance Gain, Z(s)**

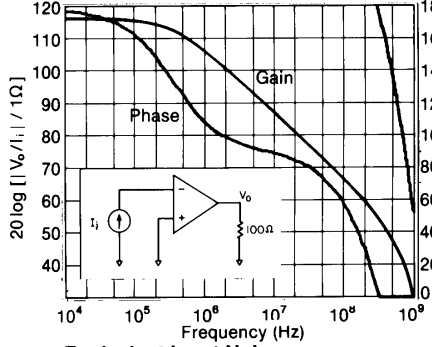


**2nd and 3rd Harmonic Distortion**

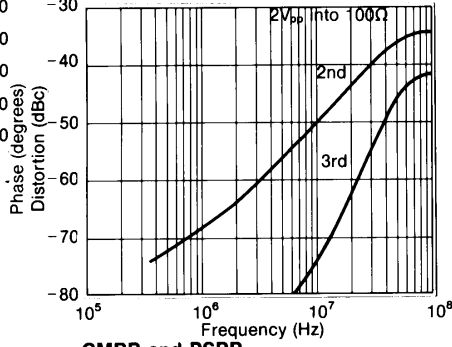


**2-Tone, 3rd Order, Intermodulation Intercept**

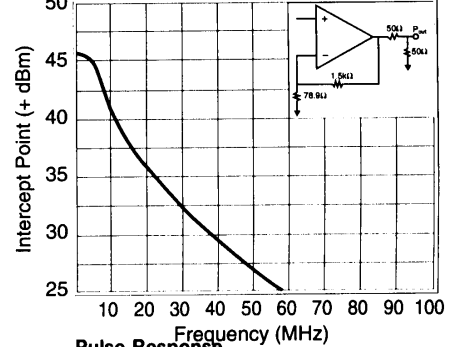


**Equivalent Input Noise**

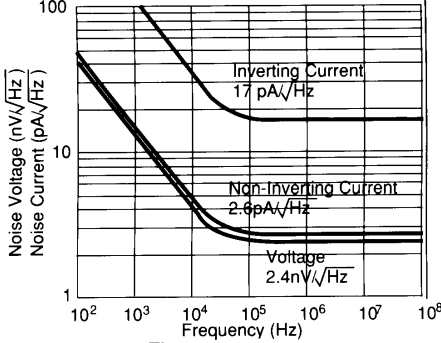


**CMRR and PSRR**

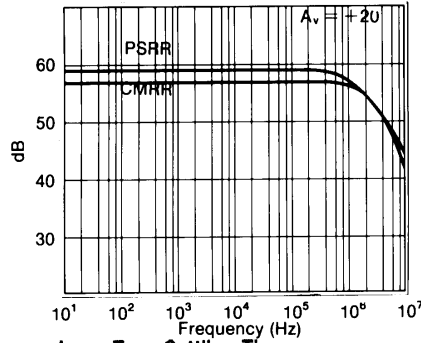


**Pulse Response**

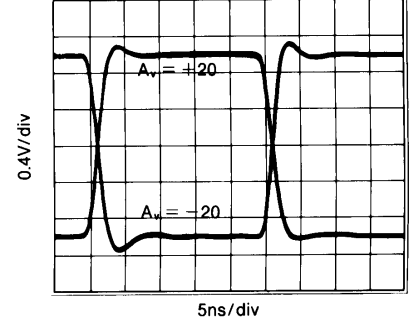


**Settling Time**

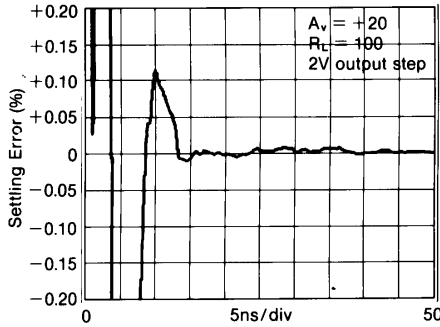


**Long-Term Settling Time**

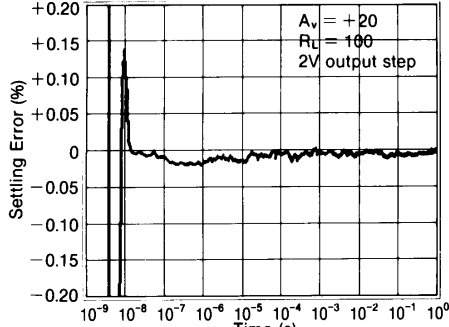

**Settling Time vs. Load Capacitance**

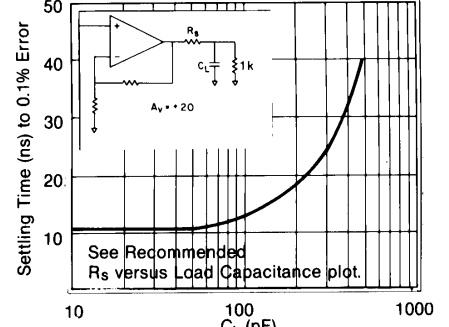


**Recommended  $R_S$  vs. Load Capacitance**

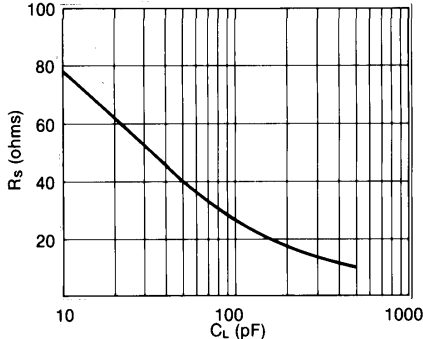

**Low Gain & Transimpedance Applications**

The CLC401 may be used at gains down to unity ( $A_V = \pm 1$ ) by choosing  $R_i$  according to Equation (4) on the following page. The curves to the right show performance at inverting unity gain with  $R_i = 2500\Omega$ , a configuration appropriate for D/A converter buffering and other transimpedance applications.

**Frequency Response,  $A_V = -1$ ,  $R_i = 2.5k\Omega$**

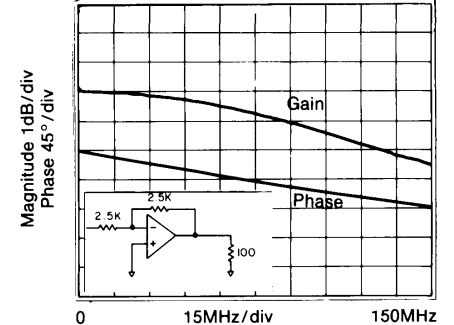

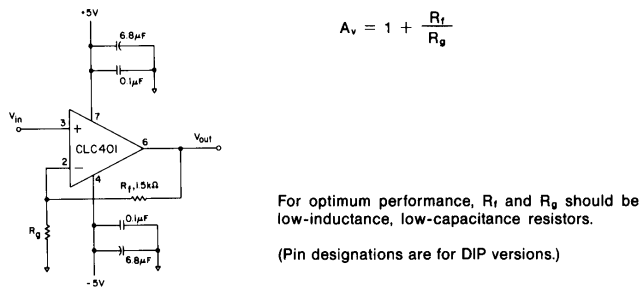


Figure 1: recommended non-inverting gain circuit

ever, an understanding of the topology will aid in achieving the best performance. The discussion below will proceed for the non-inverting gain configuration with the inverting mode analysis being very similar.

### Understanding the Loop Gain

Referring to the equivalent circuit of Figure 3, any current flowing in the inverting input is amplified to a voltage at the output through the transimpedance gain shown on the plot on page 3. This  $Z(s)$  is analogous to the open-loop gain of a voltage feedback amplifier.

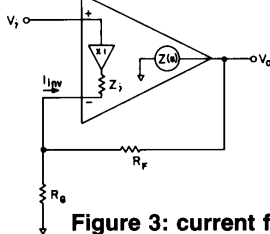


Figure 3: current feedback topology

Developing the non-inverting frequency response for the topology of Figure 3 yields:

$$\frac{V_o}{V_i} = \frac{1 + R_f/R_g}{1 - 1/LG} \quad \text{eq. (1)}$$

where LG is the loop gain defined by,

$$LG = \frac{Z(s)}{R_f} \times \frac{1}{1 + Z_i/(R_f || R_g)} \quad \text{eq. (2)}$$

Equation 1 has a form identical to that for a voltage feedback amplifier with the differences occurring in the LG expression. For an idealized treatment, set  $Z_i = 0$  which results in a very simple  $LG = Z(s)/R_f$ . (Derivation of the transfer function for the case where  $Z_i = 0$  is given in Application Note AN300-1.) Using the  $Z(s)$  (open-loop transimpedance gain) plot shown on the previous page and dividing by the recommended  $R_f = 1.5k\Omega$ , yields a large loop gain at DC. As a result, equation 1 shows that the closed-loop gain at DC is very close to  $(1 + R_f/R_g)$ .

At higher frequencies, the roll-off of  $Z(s)$  determines the closed-loop frequency response which, ideally, is dependent only on  $R_f$ . **The specifications reported on the previous pages are therefore valid only for the specified  $R_f = 1.5k\Omega$ .** Increasing  $R_f$  from  $1.5k\Omega$  will decrease the loop gain and bandwidth, while decreasing it will increase the loop gain possibly leading to inadequate phase margin and closed-loop peaking. Conversely, fixing  $R_f$  will hold the frequency response constant while the closed-loop gain can be adjusted using  $R_g$ .

The CLC401 departs from this idealized analysis to the extent that the inverting input impedance is finite. With the low quiescent power of the CLC401,  $Z_i \cong 50\Omega$  leading to a drop in loop gain and bandwidth at high gain settings, as given by equation 2. The second term in equation 2 accounts for the division in feedback current that occurs between  $Z_i$  and  $R_f || R_g$  at the inverting node of the CLC400. This decrease in bandwidth can be circumvented as described in "Increasing Bandwidth at High Gains."

### DC Accuracy and Noise

Since the two inputs for the CLC401 are quite dissimilar, the noise and offset error performance differs somewhat from that of a standard differential input amplifier. Specifically, the inverting input current noise is much larger than the non-inverting current noise. Also the two input bias currents are physically unrelated rendering bias current cancellation through matching of the inverting and non-inverting pin resistors ineffective.

In equation 3, the output offset is the algebraic sum of the equivalent input voltage and current sources that influence DC operation. Output noise is determined similarly except that a root-sum-of-squares replaces the algebraic sum.  $R_s$  is the non-inverting pin resistance.

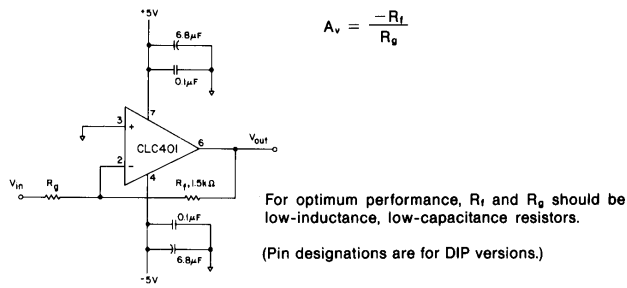


Figure 2: recommended inverting gain circuit

$$\text{Output Offset } V_o = \pm IBN \times R_s (1 + R_f/R_g) \pm \text{VIO} (1 + R_f/R_g) \pm |BI| \times R_f \quad \text{eq. (3)}$$

An important observation is that for fixed  $R_f$ , offsets as referred to the input improve as the gain is increased (divide all terms by  $1 + R_f/R_g$ ). A similar result is obtained for noise where noise figure improves as gain increases.

### Selecting Between the CLC400 or CLC401

The CLC400 is intended for gains of  $\pm 1$  to  $\pm 8$  while the CLC401 is designed for gains of  $\pm 7$  to  $\pm 50$ . Optimum performance is achieved with a feedback resistor of  $250\Omega$  with the CLC400 and  $1.5k\Omega$  with the CLC401—this distinction may be important in transimpedance applications such as D/A buffering. Although the CLC400 can be used at higher gains, the CLC401 will provide a wider bandwidth because loop gain losses due to finite  $Z_i$  are lower with the larger CLC401 feedback resistor as explained above. On the other hand, the lower recommended feedback resistance of the CLC400 minimizes the output errors due to inverting input noise and bias currents.

### Increasing Bandwidth At High Gains

Bandwidth may be increased at high closed-loop gains by adjusting  $R_f$  and  $R_g$  to make up for the losses in loop gain that occur at these high gain settings due to current division at the inverting input. An approximate relationship may be obtained by holding the LG expression constant as the gain is changed from the design point used in the specifications (that is,  $R_f = 1.5k\Omega$  and  $R_g = 79\Omega$ ). For the CLC401 this gives,

$$R_f = 2500 - 50A_v \text{ and } R_g = \frac{2500 - 50A_v}{A_v - 1} \quad \text{eq. (4)}$$

where  $A_v$  is the desired non-inverting gain. Note that with  $A_v = +20$  we get the specified  $R_f = 1.5k\Omega$ , while at higher gains, a lower value gives stable performance with improved bandwidth.

### Capacitive Feedback

Capacitive feedback should not be used with the CLC401 because of the potential for loop instability. See Application Note OA-7 for active filter realizations with the CLC401.

### Printed Circuit Layout

As with any high frequency device, a good PCB layout will enhance performance. Ground plane construction and good power supply bypassing close to the package are critical to achieving full performance. In the non-inverting configuration, the amplifier is sensitive to stray capacitance to ground at the inverting input. Hence, the inverting node connections should be small with minimal coupling to the ground plane. Shunt capacitance across the feedback resistor should not be used to compensate for this effect.

Parasitic or load capacitance directly on the output will introduce additional phase shift in the loop degrading the loop phase margin and leading to frequency response peaking. A small series resistor before the capacitance effectively decouples this effect. The graphs on the preceding page illustrate the required resistor value and resulting performance vs. capacitance.

Precision buffered resistors (PRP8351 series from Precision Resistive Products) with low parasitic reactances were used to develop the data sheet specifications. Precision carbon composition resistors will also yield excellent results. Standard spirally-trimmed RN55D metal film resistors will work with a slight decrease in bandwidth due to their reactive nature at high frequencies.

Evaluation PC boards (part no. CLC730013 for through-hole and CLC730027 for SOIC) for the CLC401 are available.

**This page intentionally left blank.**

---

**Customer Design Applications Support**

National Semiconductor is committed to design excellence. For sales, literature and technical support, call the National Semiconductor Customer Response Group at **1-800-272-9959** or fax **1-800-737-7018**.

**Life Support Policy**

National's products are not authorized for use as critical components in life support devices or systems without the express written approval of the president of National Semiconductor Corporation. As used herein:

1. Life support devices or systems are devices or systems which, a) are intended for surgical implant into the body, or b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**

1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

**National Semiconductor Europe**

Fax: (+49) 0-180-530 85 86  
E-mail: europe.support.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Francais Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**

2501 Miramar Tower  
1-23 Kimberley Road  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**

Tel: 81-043-299-2309  
Fax: 81-043-299-2408

---

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.