

# Schottky barrier diode

## RB715W / RB715F

**●Applications**

General purpose detection  
High speed switching


**●Features**

- 1) Small surface mounting type (EMD3, UMD3)
- 2) Low  $V_F$  and low  $I_R$
- 3) High reliability


**●Construction**

Silicon epitaxial planar

**●Circuit**



**●External dimensions (Units : mm)**

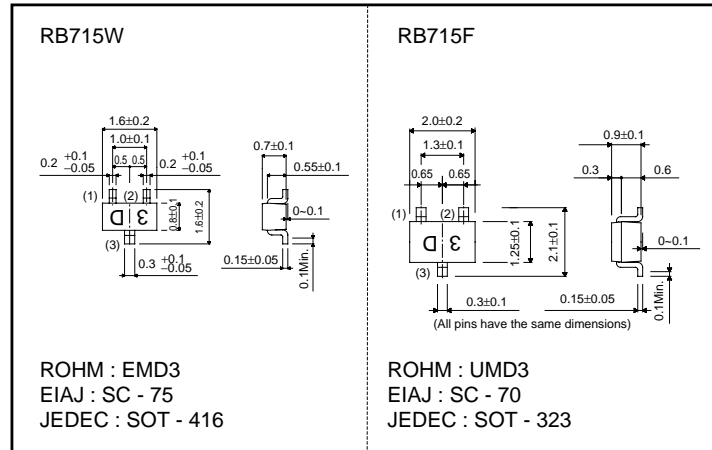

**●Absolute maximum ratings (Ta=25°C)**

Parameter	Symbol	Limits	Unit
Peak reverse voltage	$V_{RM}$	40	V
DC reverse voltage	$V_R$	40	V
Mean rectifying current	$I_o$	30	mA
Peak forward surge current*	$I_{FSM}$	200	mA
Junction temperature	$T_j$	125	°C
Storage temperature	$T_{stg}$	-40~+125	°C

\* 60 Hz for 1  $\mu$ s

**●Electrical characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	$V_F$	-	-	0.37	V	$I_F=1mA$
Reverse current	$I_R$	-	-	1	$\mu A$	$V_R=10V$
Capacitance between terminals	$C_T$	-	2.0	-	pF	$V_R=1V, f=1MHz$

Note) ESD sensitive product handling required.

Diodes

●Electrical characteristic curves (Ta=25°C)

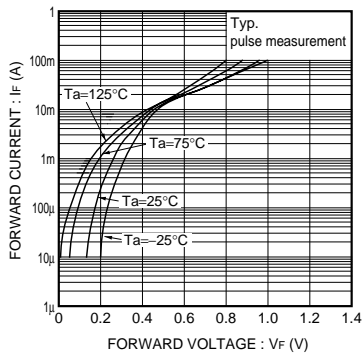


Fig. 1 Forward characteristics

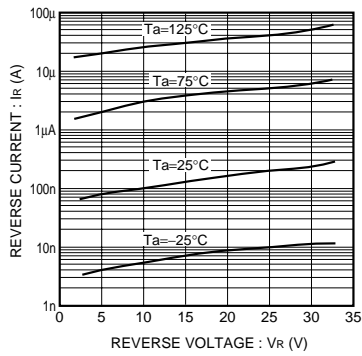


Fig. 2 Reverse characteristics

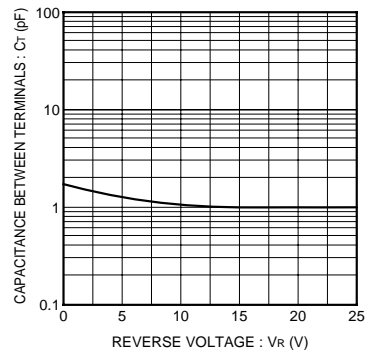


Fig. 3 Capacitance between terminals characteristics

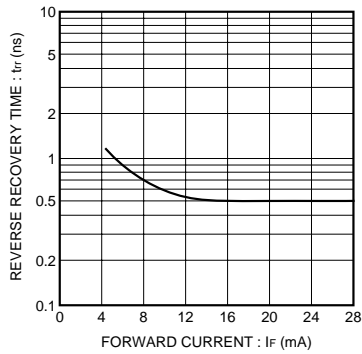


Fig. 4 Reverse recovery time characteristics