

Typical Applications


- Broadband, Low Noise Gain Blocks
- IF or RF Buffer Amplifiers
- Driver Stage for Power Amplifiers
- Final PA for Low Power Applications
- Broadband Test Equipment

Product Description


The RF2335 is a general purpose, low-cost RF amplifier IC. The device is manufactured on an advanced Gallium Arsenide Heterojunction Bipolar Transistor (HBT) process, and has been designed for use as an easily-cascadable 50Ω gain block. Applications include IF and RF amplification in wireless voice and data communication products operating in frequency bands up to 6000MHz. The device is self-contained with 50Ω input and output impedances and requires only two external DC biasing elements to operate as specified. The RF2335 is available in a very small industry-standard SOT23 5-lead surface mount package, enabling compact designs which conserve board space.

Optimum Technology Matching® Applied

- | | | |
|-------------------------------------|--|--------------------------------------|
| ☐ Si BJT | ☒ GaAs HBT | ☐ GaAs MESFET |
| ☐ Si Bi-CMOS | ☐ SiGe HBT | ☐ Si CMOS |

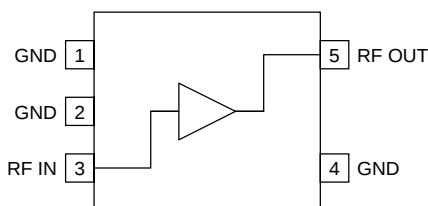

Functional Block Diagram

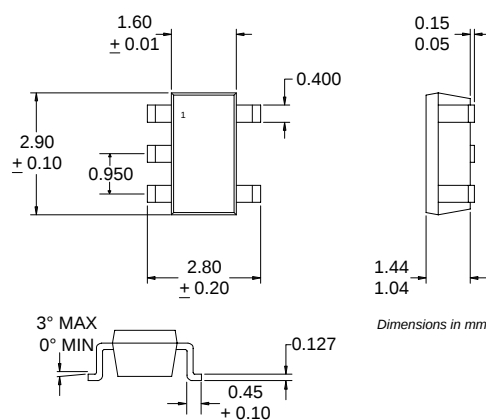

Package Style: SOT 5 Lead

Features

- DC to 6000MHz Operation
- Internally matched Input and Output
- 12dB Small Signal Gain
- +33dBm Output IP3
- +17dBm Output Power
- Good Gain Flatness

Ordering Information

- | | |
|-------------|----------------------------------|
| RF2335 | General Purpose Amplifier |
| RF2335 PCBA | Fully Assembled Evaluation Board |

RF Micro Devices, Inc.
7625 Thorndike Road
Greensboro, NC 27409, USA

Tel (336) 664 1233
Fax (336) 664 0454
<http://www.rfmd.com>

RF2335

Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Current	120	mA
Input RF Power	+20	dBm
Operating Ambient Temperature	-40 to +70	°C
Storage Temperature	-60 to +150	°C



Caution! ESD sensitive device.

RF Micro Devices believes the furnished information is correct and accurate at the time of this printing. However, RF Micro Devices reserves the right to make changes to its products without notice. RF Micro Devices does not assume responsibility for the use of the described product(s).

4


GENERAL PURPOSE
AMPLIFIERS

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					T=25°C, I _{CC} =65mA
Frequency Range		DC to 6000		MHz	
3dB Bandwidth		3		GHz	
Gain		13.7		dB	Freq=100MHz
		13.1		dB	Freq=1000MHz
		12.4		dB	Freq=2000MHz
		11		dB	Freq=3000MHz
		10.6		dB	Freq=4000MHz
		10		dB	Freq=5000MHz
		9.8		dB	Freq=6000MHz
		±1		dB	100MHz to 2000MHz
Gain Flatness		±1		dB	100MHz to 2000MHz
Noise Figure		5.6		dB	Freq=1000MHz
Input VSWR		1.8:1			In a 50Ω system, DC to 2000MHz
Output VSWR		1.7:1			In a 50Ω system, DC to 2000MHz
Output IP ₃		+33		dBm	Freq=1000MHz±50kHz, P _{TONE} =-10dBm
Output P _{1dB}		+17.3		dBm	Freq=1000MHz
Reverse Isolation		17.2		dB	Freq=2000MHz
Power Supply					With 22Ω bias resistor
Device Operating Voltage		5.0		V	At pin 5 with I _{CC} =65mA
Operating Current		65		mA	

Pin	Function	Description	Interface Schematic
1	GND	Ground connection. Keep traces physically short and connect immediately to ground plane for best performance.	
2	GND	Same as pin 1.	
3	RF IN	RF input pin. This pin is NOT internally DC blocked. A DC blocking capacitor, suitable for the frequency of operation, should be used in most applications. DC coupling of the input is not allowed, because this will override the internal feedback loop and cause temperature instability.	
4	GND	Same as pin 1.	
5	RF OUT	RF output and bias pin. Biasing is accomplished with an external series resistor and choke inductor to V_{CC}. The resistor is selected to set the DC current into this pin to a desired level. The resistor value is determined by the following equation: $R = \frac{(V_{SUPPLY} - V_{DEVICE})}{I_{CC}}$ Care should also be taken in the resistor selection to ensure that the current into the part never exceeds 120 mA over the planned operating temperature. This means that a resistor between the supply and this pin is always required, even if a supply near 5.0V is available, to provide DC feedback to prevent thermal runaway. Because DC is present on this pin, a DC blocking capacitor, suitable for the frequency of operation, should be used in most applications. The supply side of the bias network should also be well bypassed.	

Evaluation Board Schematic

(Download [Bill of Materials](http://www.rfmd.com) from www.rfmd.com.)

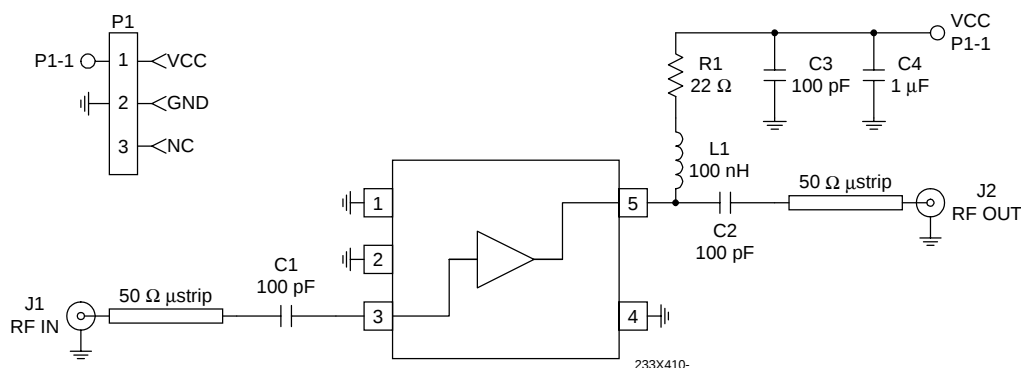

Evaluation Board Layout Board Size 1" x 1"

4

GENERAL PURPOSE
AMPLIFIERS

