

2SK374

Silicon N-Channel Junction

For low-frequency amplification


For switching

■ Features

- Low noise-figure (NF)
- High gate-drain voltage V_{GDO}
- Downsizing of sets by mini-type package and automatic insertion by taping/magazine packing are available.

■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Rating | Unit |
|-----------------------------|-----------|--------------|------------------|
| Drain-Source voltage | V_{DSX} | 55 | V |
| Gate-Drain voltage | V_{GDO} | - 55 | V |
| Gate-Source voltage | V_{GSO} | - 55 | V |
| Drain current | I_D | ± 30 | mA |
| Gate current | I_G | 10 | mA |
| Allowable power dissipation | P_D | 200 | mW |
| Channel temperature | T_{ch} | 150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | - 55 to +150 | $^\circ\text{C}$ |

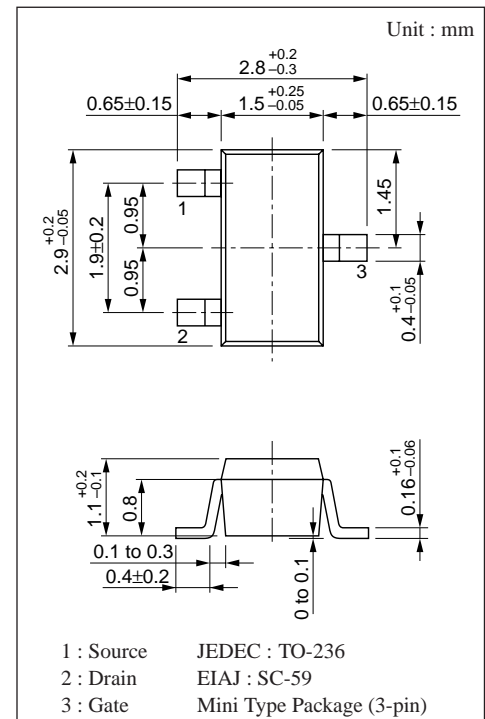


■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|------------------------------|-------------|--|------|------|-----|------|
| Drain-Source cut-off current | I_{DSS}^* | $V_{DS}=10\text{V}, V_{GS}=0$ | 1 | | 20 | mA |
| Gate-Source leakage current | I_{GSS} | $V_{GS}=30\text{V}, V_{DS}=0$ | | | -10 | nA |
| Gate-Drain voltage | V_{GDS} | $I_G=100\mu\text{A}, V_{DS}=0$ | - 55 | - 80 | | V |
| Gate-Source cut-off voltage | V_{GSC} | $V_{DS}=10\text{V}, I_D=10\mu\text{A}$ | | | - 5 | V |
| Mutual conductance | g_m | $V_{DS}=10\text{V}, I_D=5\text{mA}, f=1\text{kHz}$ | 2.5 | 7.5 | | mS |
| Input capacitance | C_{iss} | $V_{DS}=10\text{V}, V_{GS}=0, f=1\text{MHz}$ | | 6.5 | | pF |
| Feedback capacitance | C_{rss} | | | 1.9 | | pF |
| Noise voltage | NF | $V_{DS}=10\text{V}, V_{GS}=0, R_g=100\text{k}\Omega, f=100\text{Hz}$ | | 2.5 | | dB |


* I_{DSS} rank classification

| Rank | P | Q | R | S |
|----------------------|--------|----------|---------|----------|
| $I_{DSS}(\text{mA})$ | 1 to 3 | 2 to 6.5 | 5 to 12 | 10 to 20 |
| Part number symbol | 2BP | 2BQ | 2BR | 2BS |


■ Marking (Example)

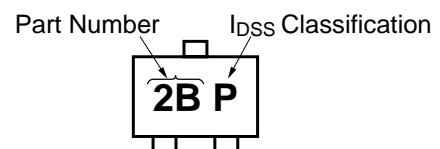


$P_D - T_a$

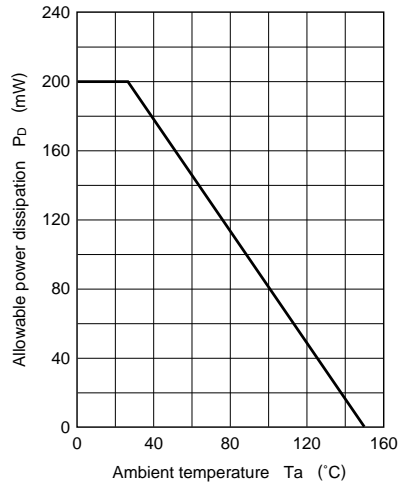


$I_D - V_{DS}$

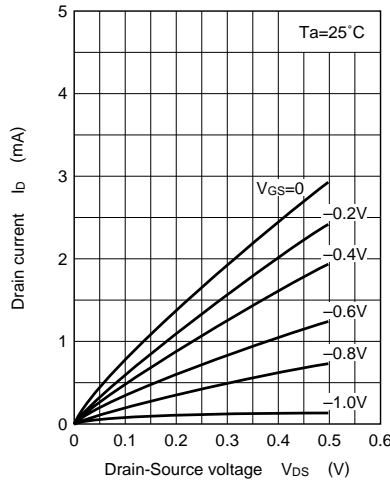


$I_D - V_{DS}$

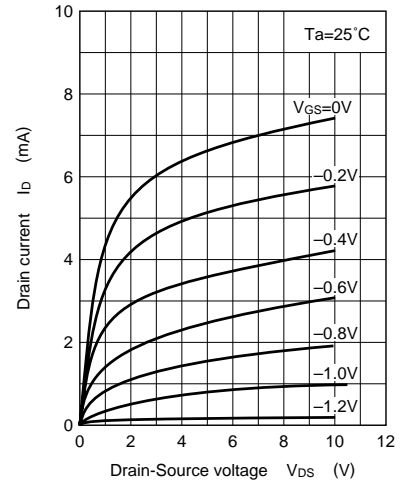


$I_D - V_{GS}$

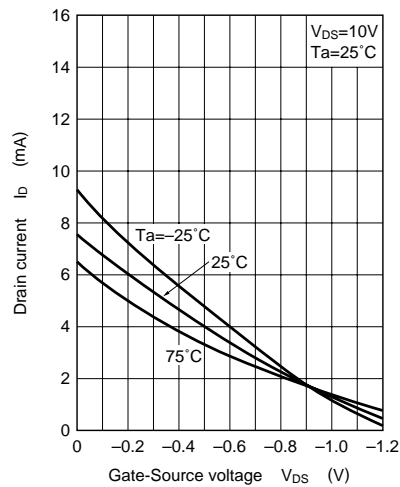


$g_m - V_{GS}$

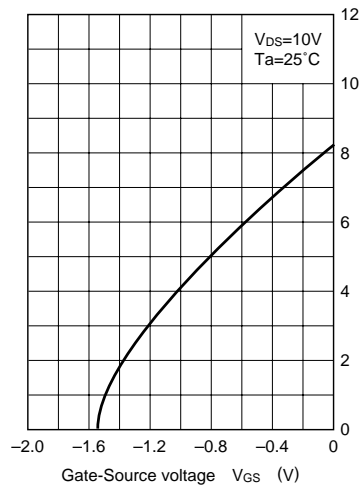

$g_m - I_D$

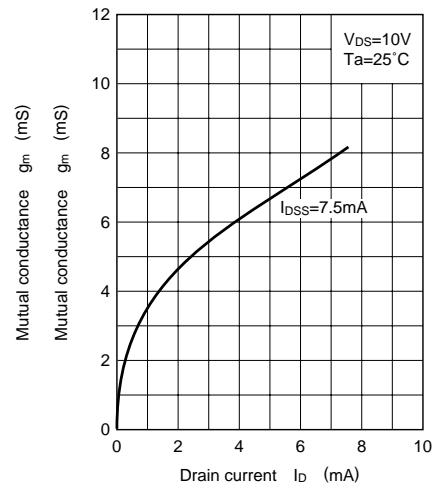

$C_{RSS} - V_{DS}$

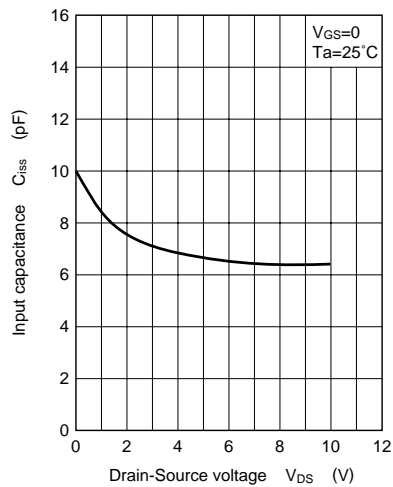

$C_{OSS} - V_{DS}$

