

2SK2184
(F5S50VX2)

500V 5A

FEATURES

- Input capacitance (Ciss) is small.
Especially, input capacitance at 0 bias is small.
- The static Rds(on) is small.
- The switching time is fast.

APPLICATION


- Switching power supply of AC 100V input
- High voltage power supply
- Inverter

RATINGS

●Absolute Maximum Ratings (Tc = 25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55~150	°C
Channel Temperature	T _{ch}		150	
Drain-Source Voltage	V _{DSS}		500	V
Gate-Source Voltage	V _{GSS}		±30	
Continuous Drain Current (DC)	I _D		5	A
Continuous Drain Current (Peak)	I _{DP}		15	
Continuous Source Current (DC)	I _S		5	
Total Power Dissipation	P _T		50	W
Single Pulse Avalanche Current	I _{AS}	T _{ch} = 25°C	5	A

OUTLINE DIMENSIONS

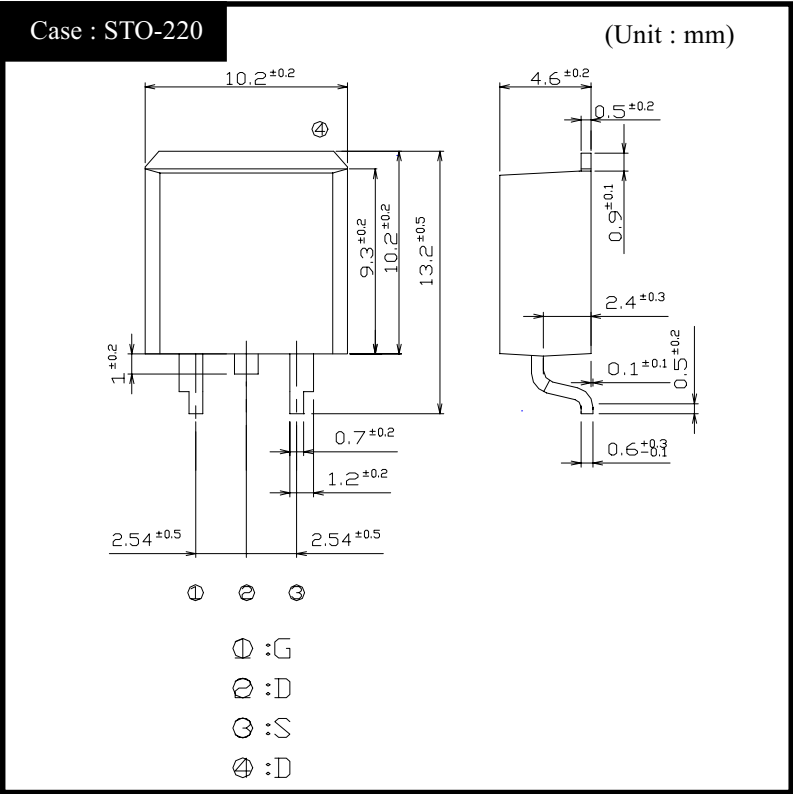


●Electrical Characteristics $T_c = 25^{\circ}\text{C}$


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 1\text{mA}$, $V_{GS} = 0\text{V}$	500			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 500\text{V}$, $V_{GS} = 0\text{V}$			250	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 30\text{V}$, $V_{DS} = 0\text{V}$			± 0.1	
Forward Transconductance	g_{fs}	$I_D = 2.5\text{A}$, $V_{DS} = 10\text{V}$	1.5	3.8		S
Static Drain-Source On-state Resistance	$R_{DS(ON)}$	$I_D = 2.5\text{A}$, $V_{GS} = 10\text{V}$		1.1	1.5	Ω
Gate Threshold Voltage	V_{TH}	$I_D = 1\text{mA}$, $V_{DS} = 10\text{V}$	2.5	3.0	3.5	V
Source-Drain Diode Forwade Voltage	V_{SD}	$I_S = 2.5\text{A}$, $V_{GS} = 0\text{V}$			1.5	
Thermal Resistance	θ_{jc}	junction to case			2.5	$^{\circ}\text{C}/\text{W}$
Total Gate Charge	Q_g	$V_{DD} = 400\text{V}$, $V_{GS} = 10\text{V}$, $I_D = 5\text{A}$		21		nC
Input Capacitance	C_{iss}	$V_{DS} = 10\text{V}$, $V_{GS} = 0\text{V}$, $f = 1\text{MHz}$		580		pF
Reverse Transfer Capacitance	C_{rss}			45		
Output Capacitance	C_{oss}			140		
Turn-On Time	t_{on}	$I_D = 2.5\text{A}$, $V_{GS} = 10\text{V}$, $R_L = 60\Omega$		55	90	ns
Turn-Off Time	t_{off}			110	170	

2SK2184


Transfer Characteristics

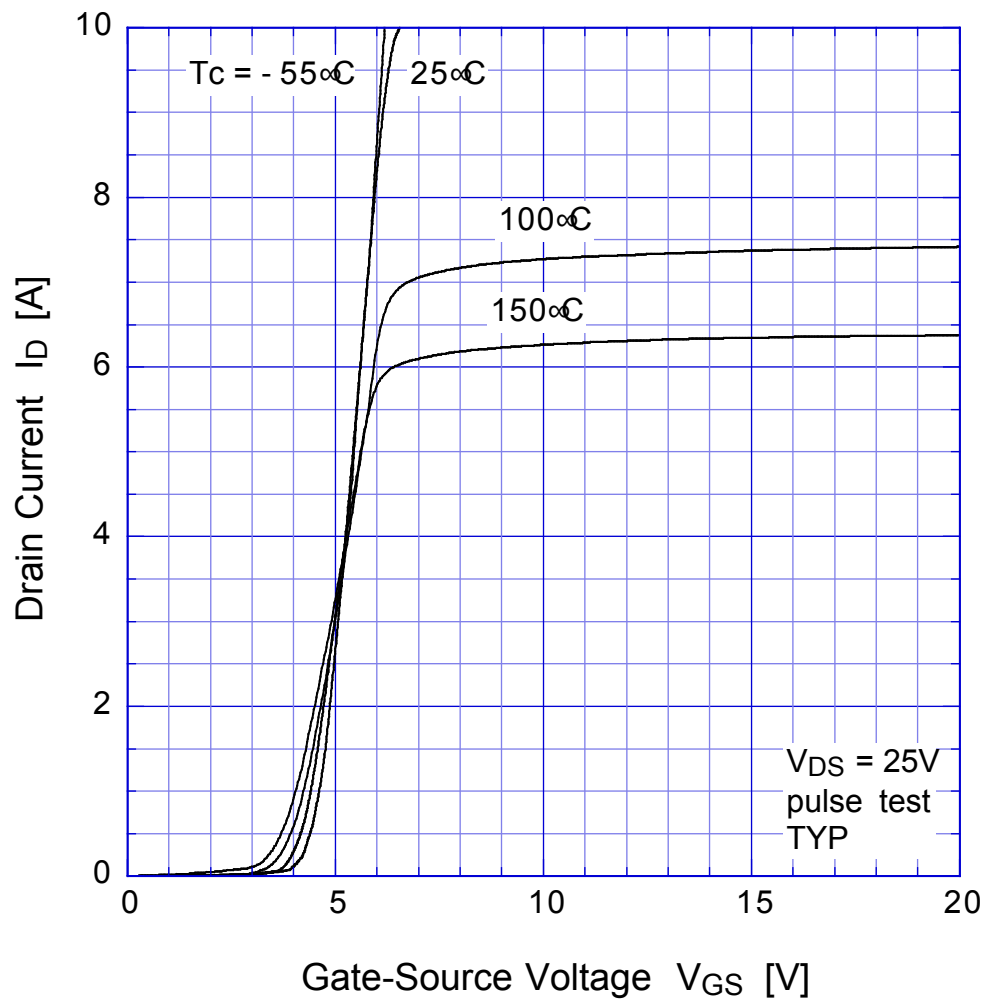

2SK2184 Static Drain-Source On-state Resistance

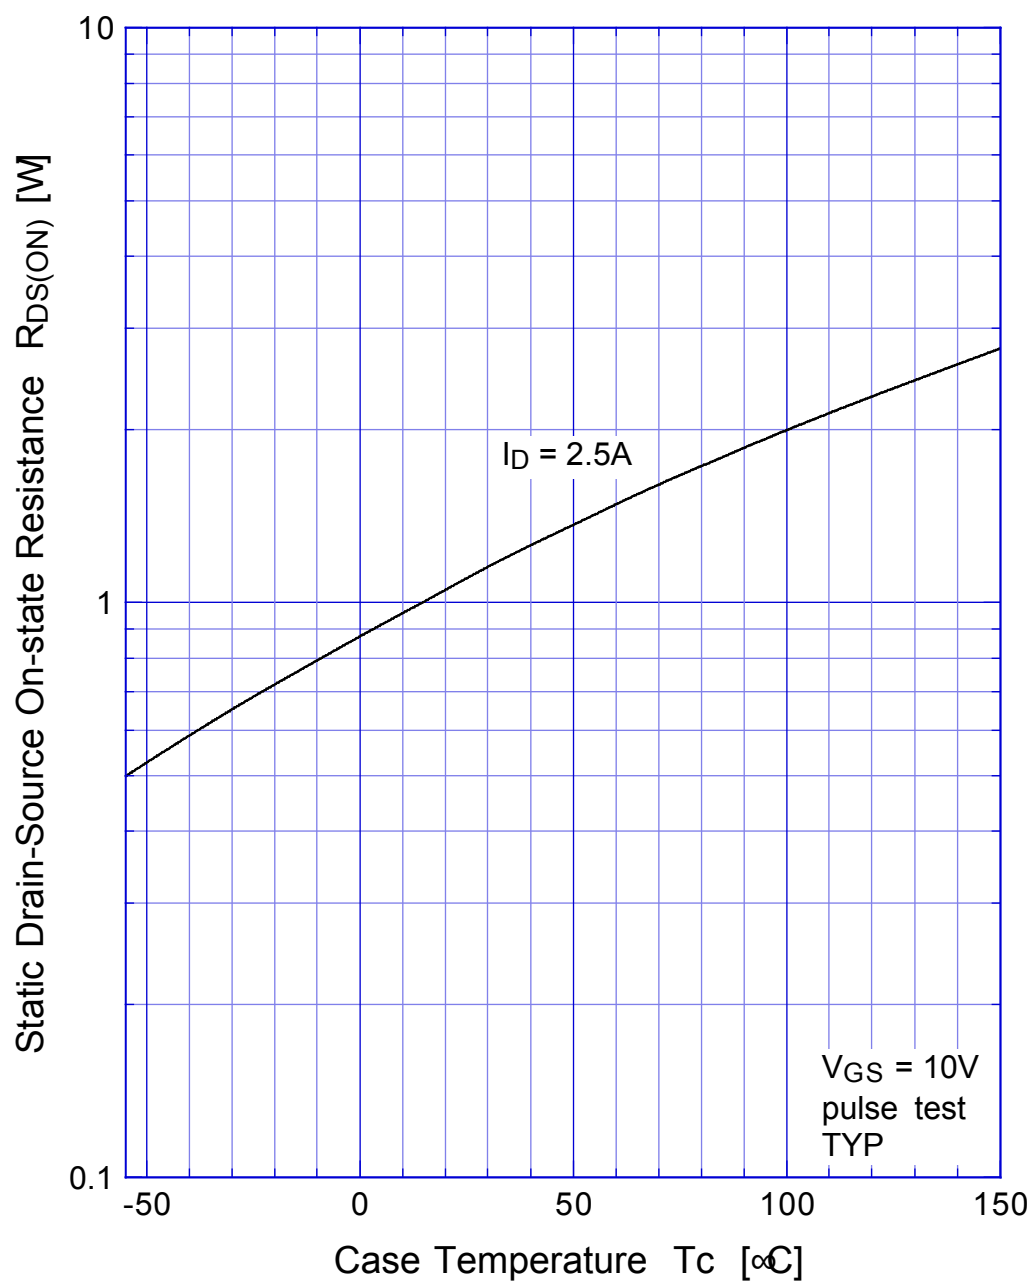


2SK2184 Gate Threshold Voltage

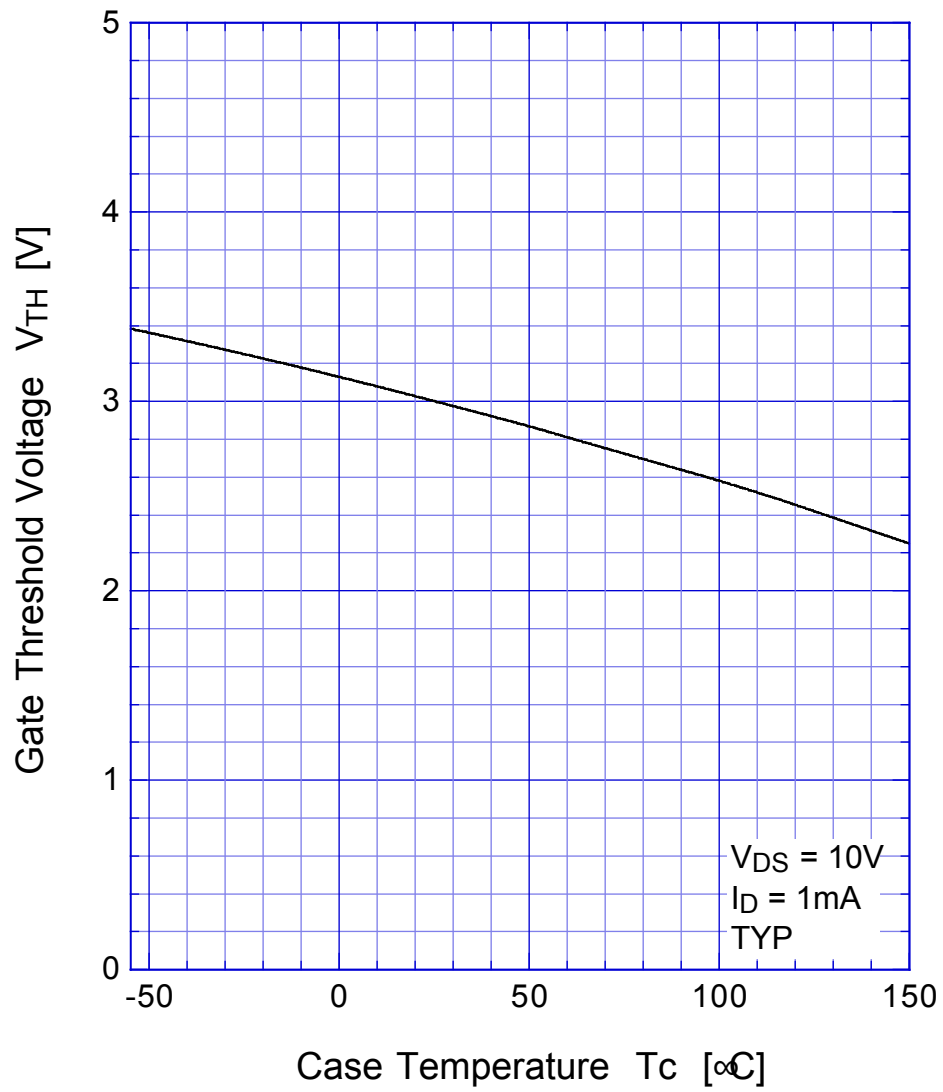


2SK2184

Safe Operating Area

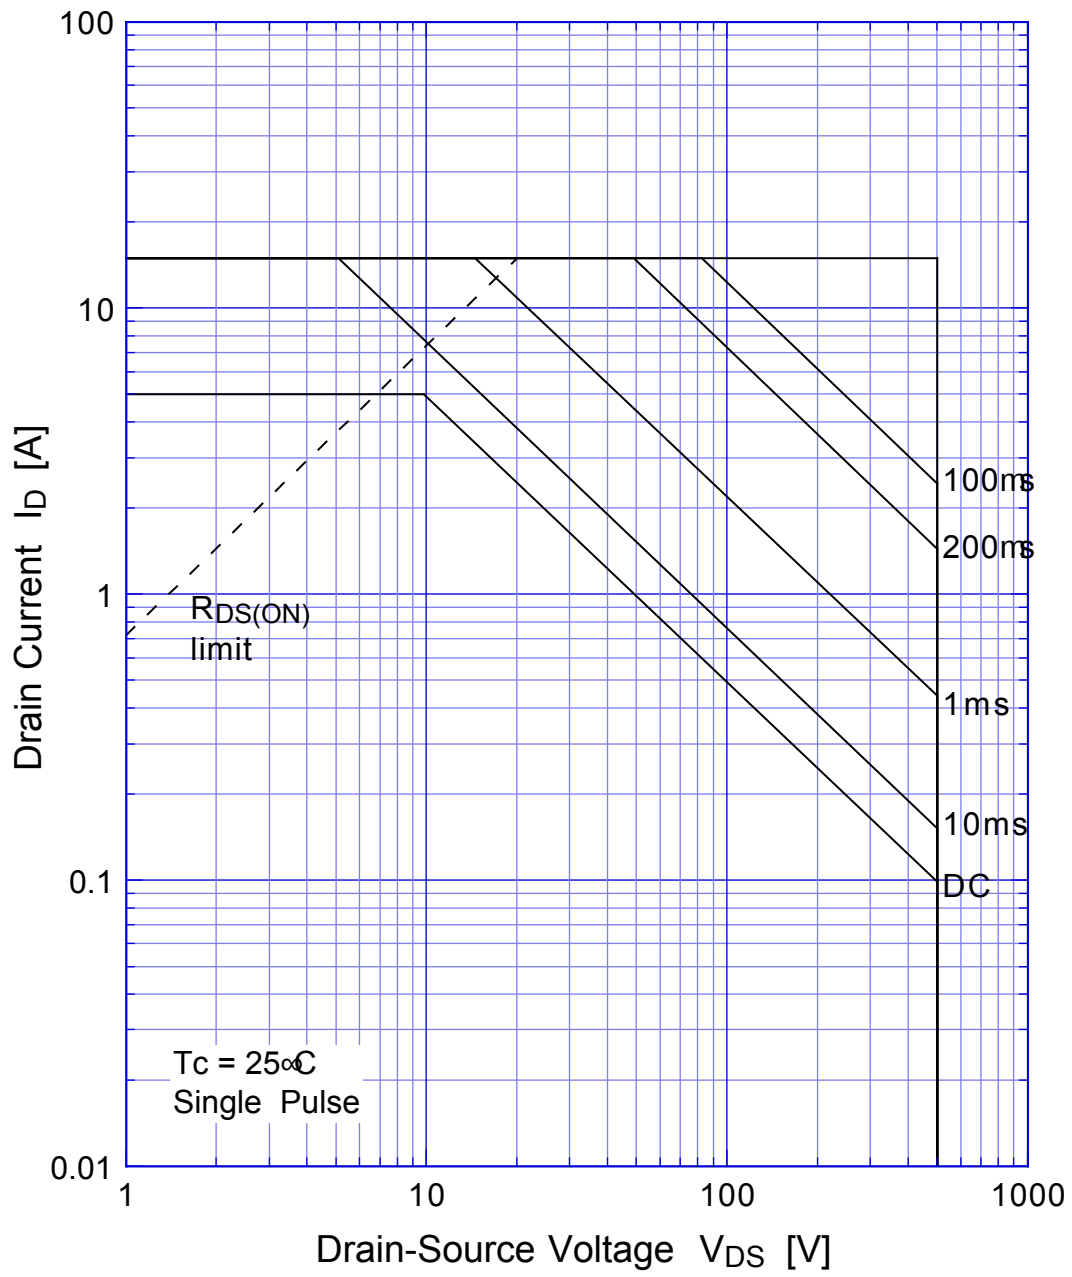


2SK2184 Transient Thermal Impedance

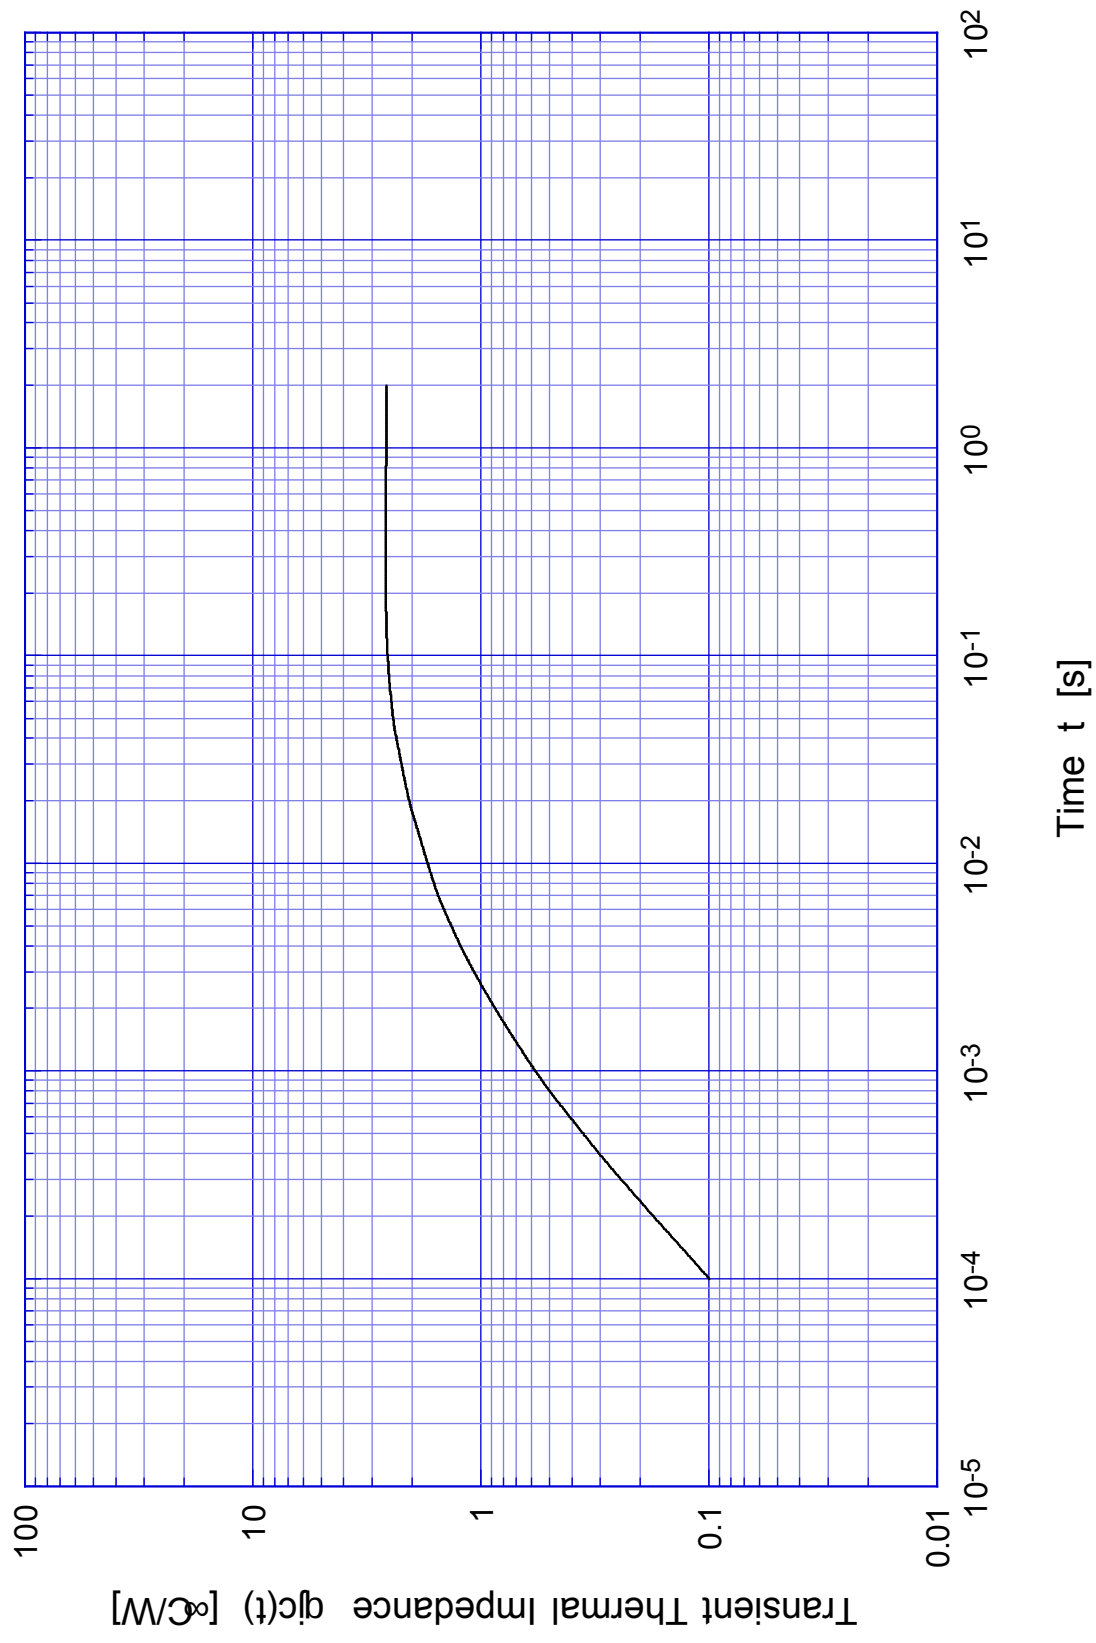


2SK2184

Capacitance

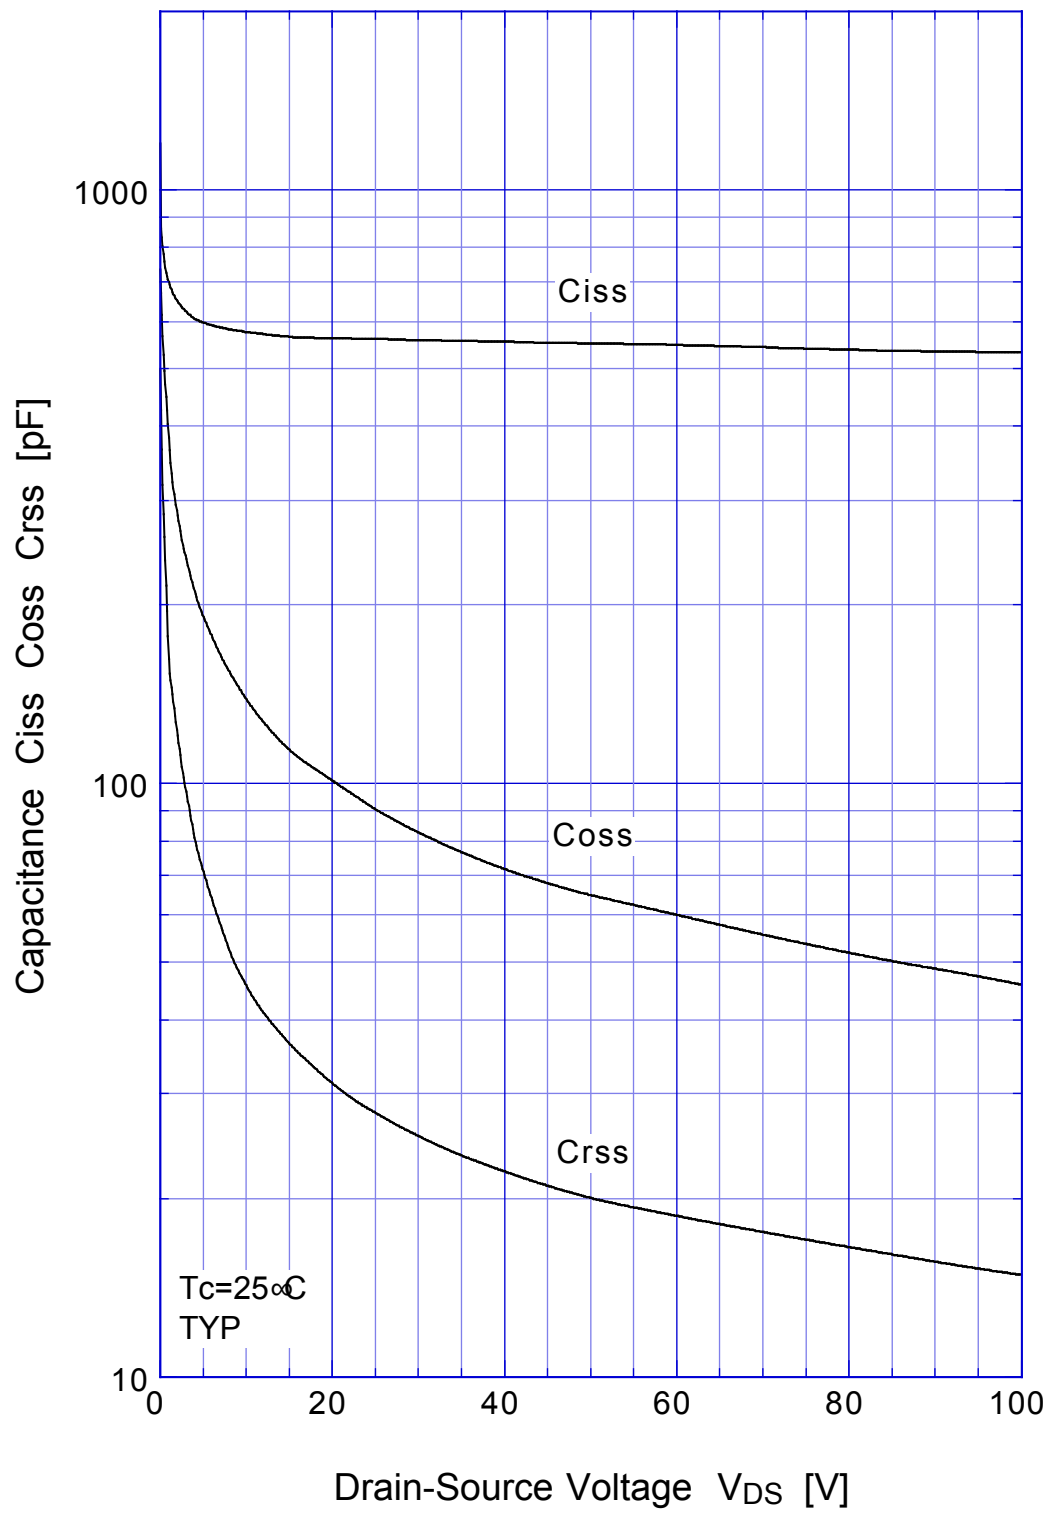

2SK2184

Power Derating

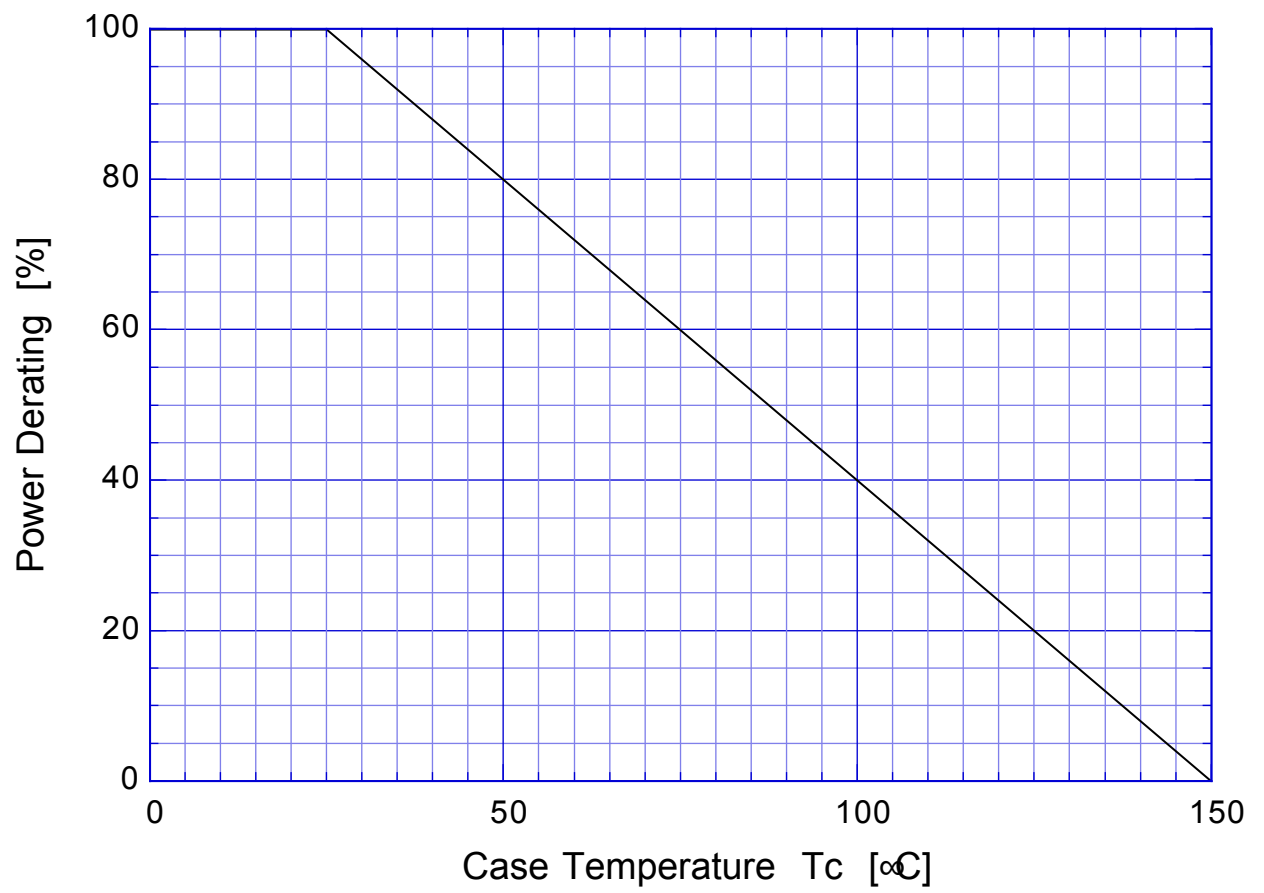

2SK2184

Gate Charge Characteristics

