

D2FS4

40V 1.6A


FEATURES

- Small SMT
- Tj150°C
- PRRSM avalanche guaranteed

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

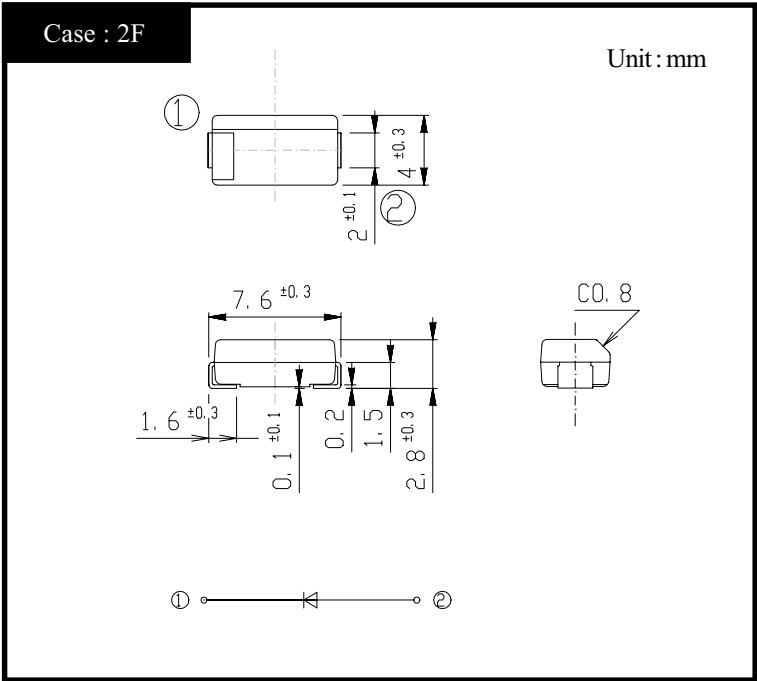

RATINGS

● Absolute Maximum Ratings (If not specified Tl=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	VRM		40	V
Repetitive Peak Surge Reverse Voltage	VRRSM	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	IO	50Hz sine wave, R-load Ta=34°C On alumina substrate	1.6	A
		50Hz sine wave, R-load Ta=25°C On glass-epoxy substrate	1.3	
Peak Surge Forward Current	IFSM	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=125°C	60	A
Repetitive Peak Surge Reverse Power	PRRSM	Pulse width 10 μs, Tj=25°C	330	W

● Electrical Characteristics (If not specified Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	VF	IF=1.6A, Pulse measurement	Max.0.55	V
Reverse Current	IR	VR=VRM, Pulse measurement	Max.2.5	mA
Junction Capacitance	Cj	f=1MHz, VR=10V	Typ.150	pF
Thermal Resistance	θjl	junction to lead	Max.24	°C/W
	θja	junction to ambient On alumina substrate	Max.90	
		junction to ambient On glass-epoxy substrate	Max.120	


D2FS4

Forward Voltage

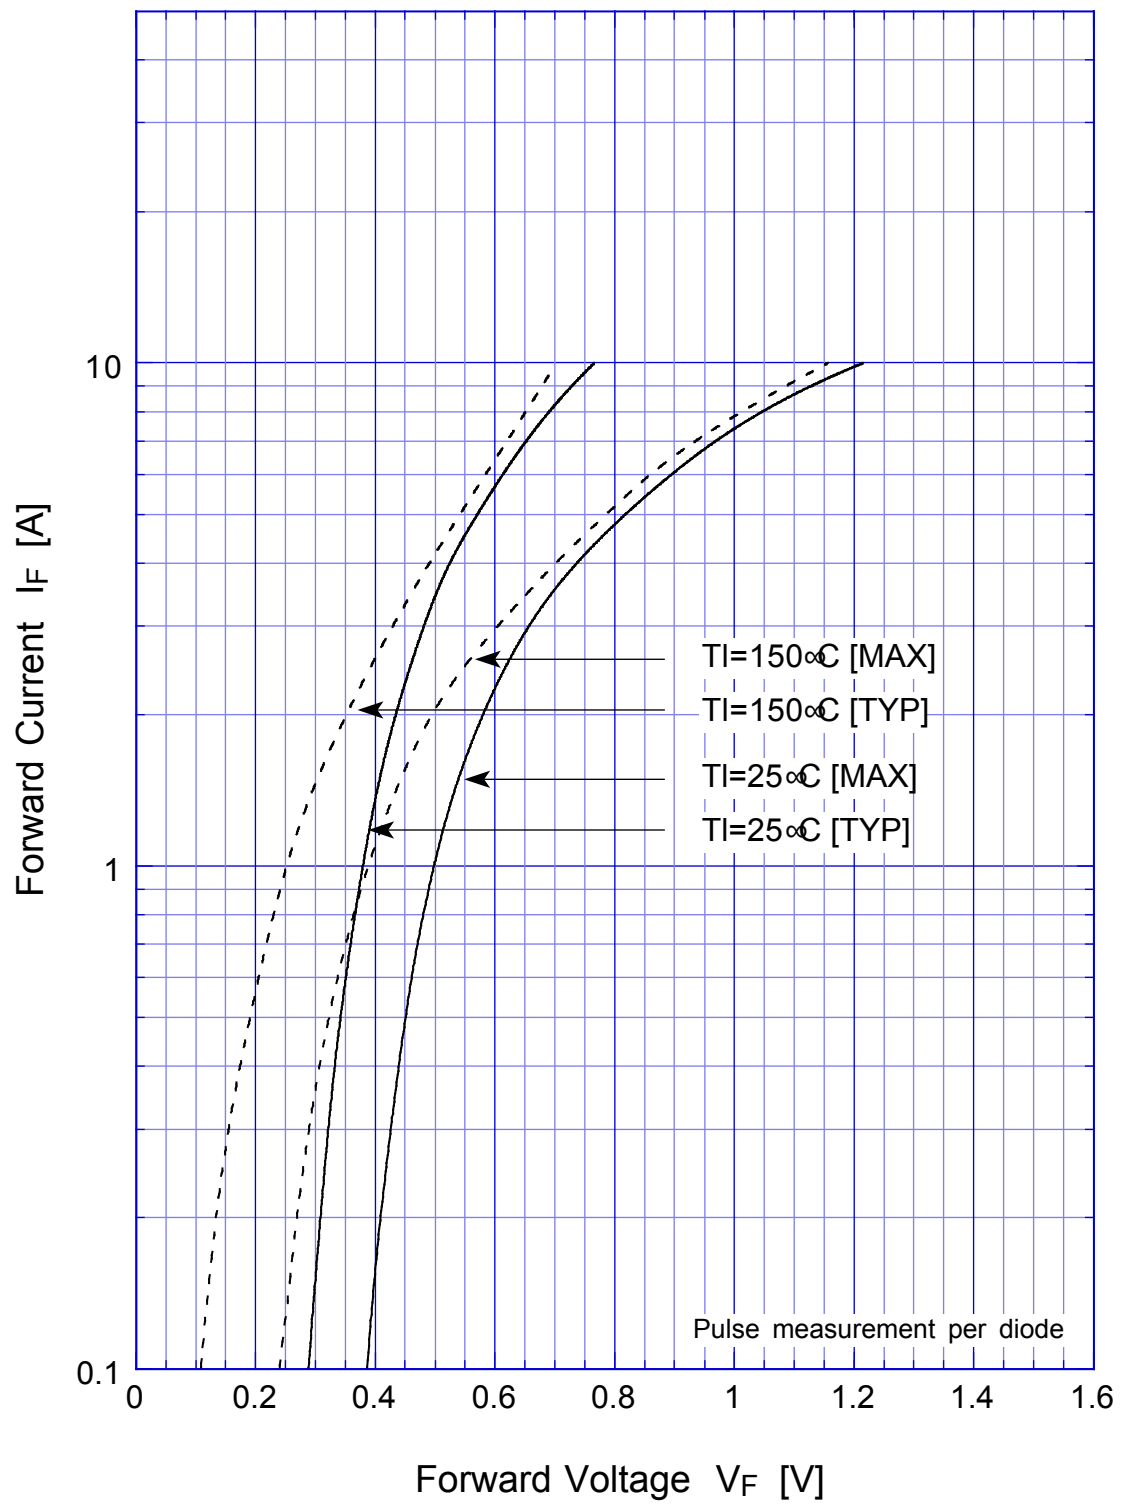

D2FS4


Junction Capacitance

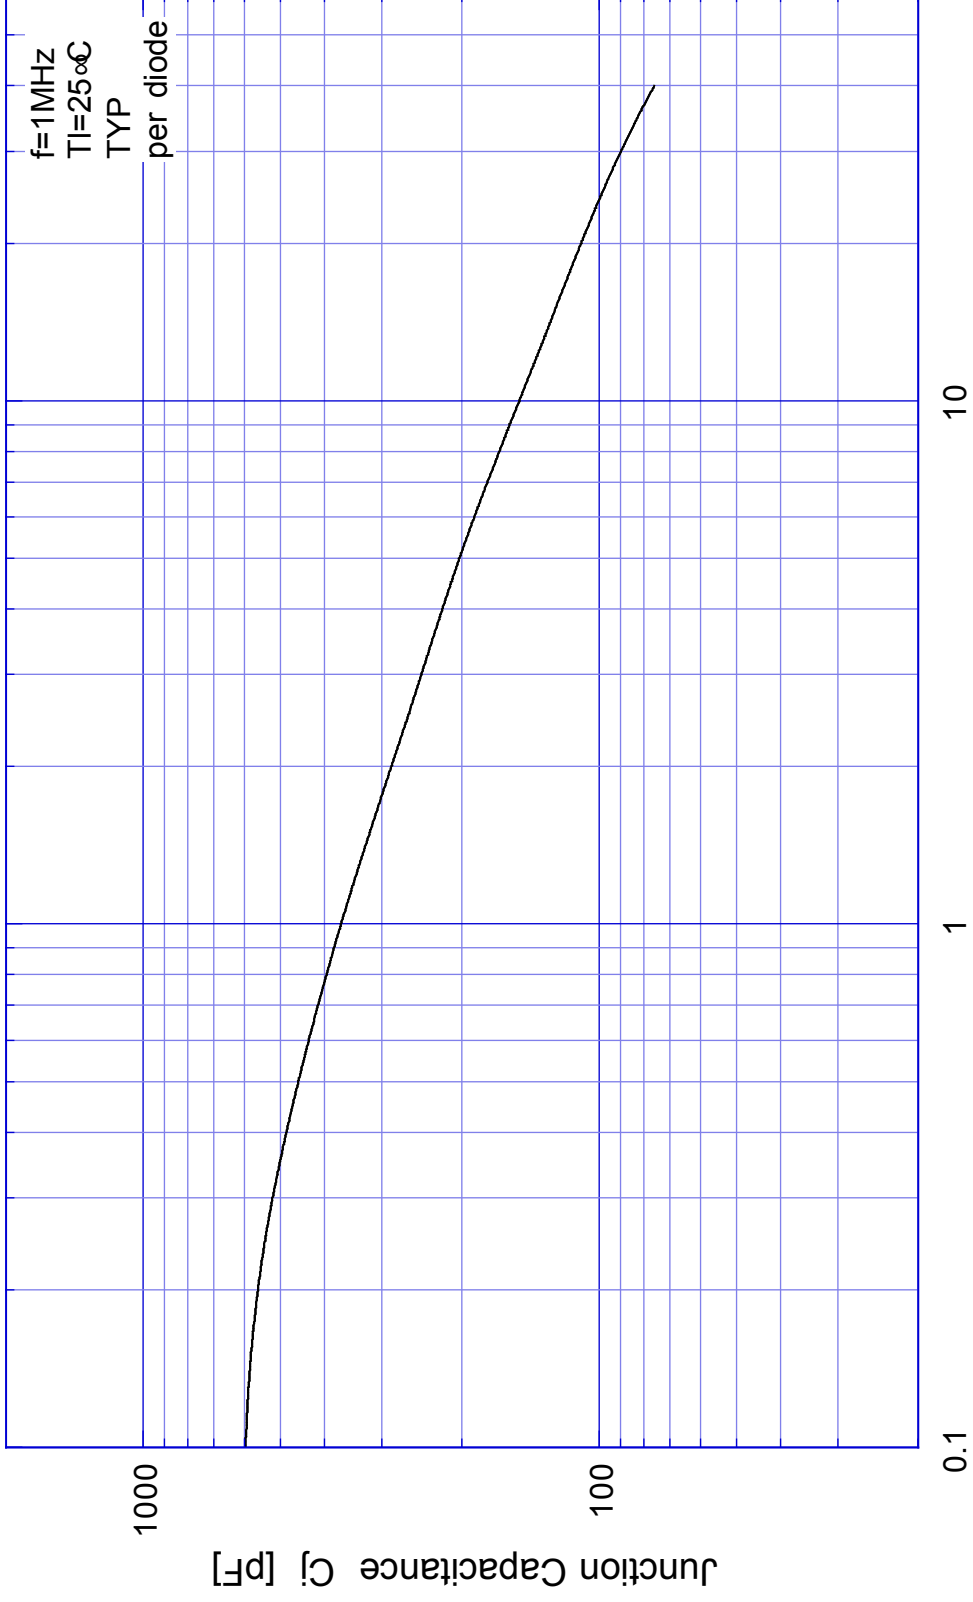

Reverse Voltage V_R [V]


D2FS4

Reverse Current

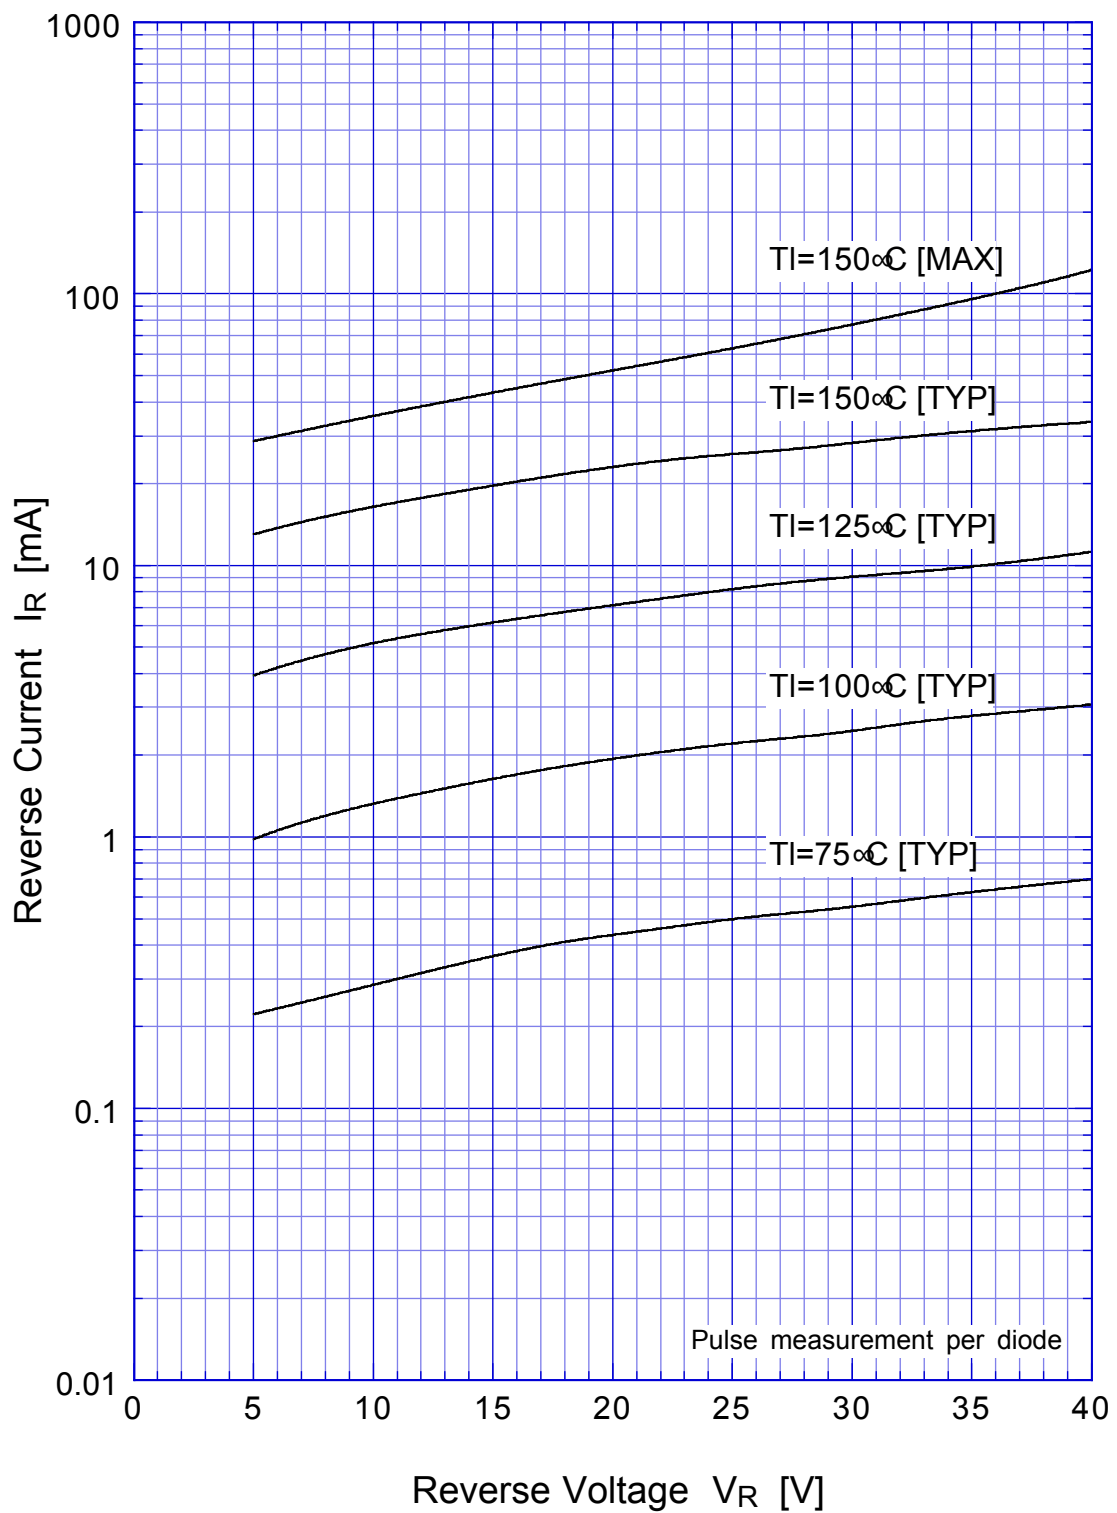


D2FS4

Reverse Power Dissipation

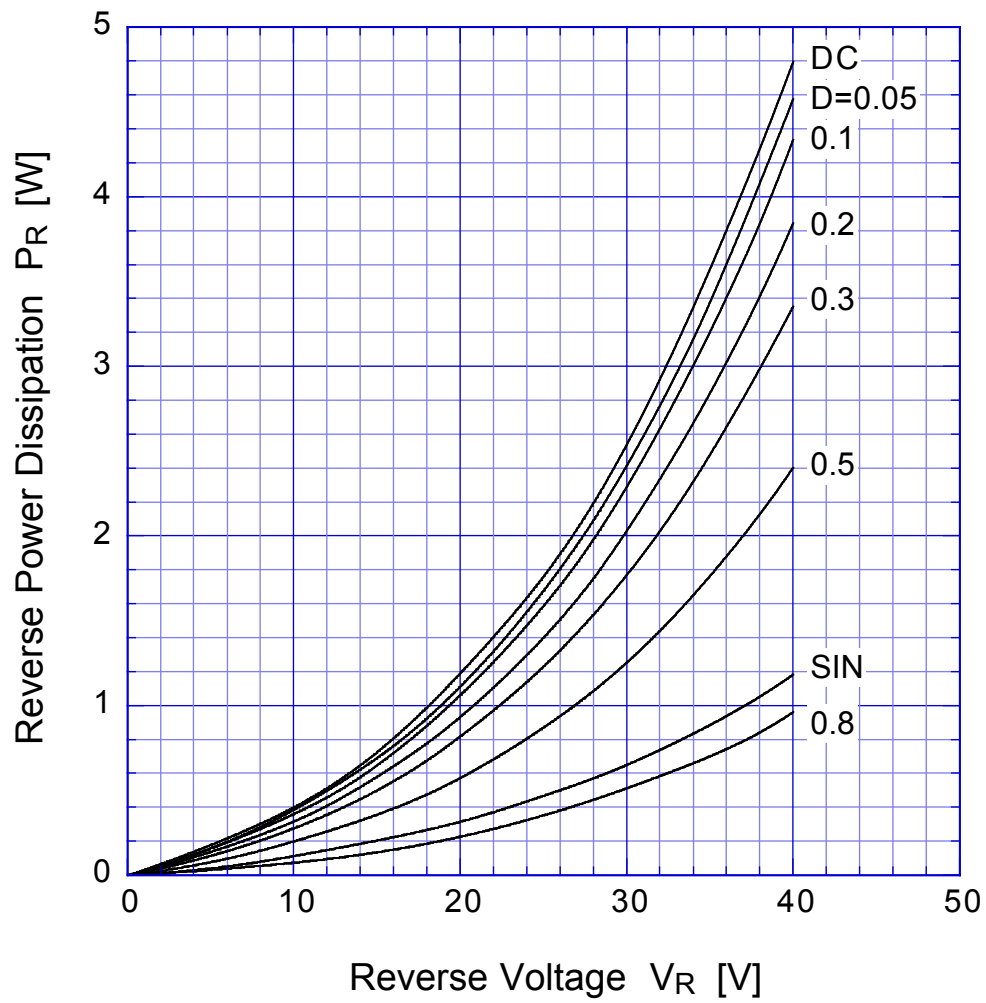


$T_j = 150^\circ\text{C}$

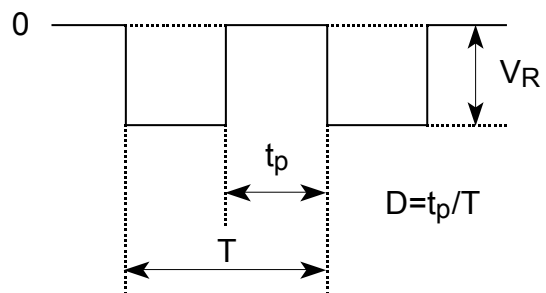


D2FS4

Forward Power Dissipation

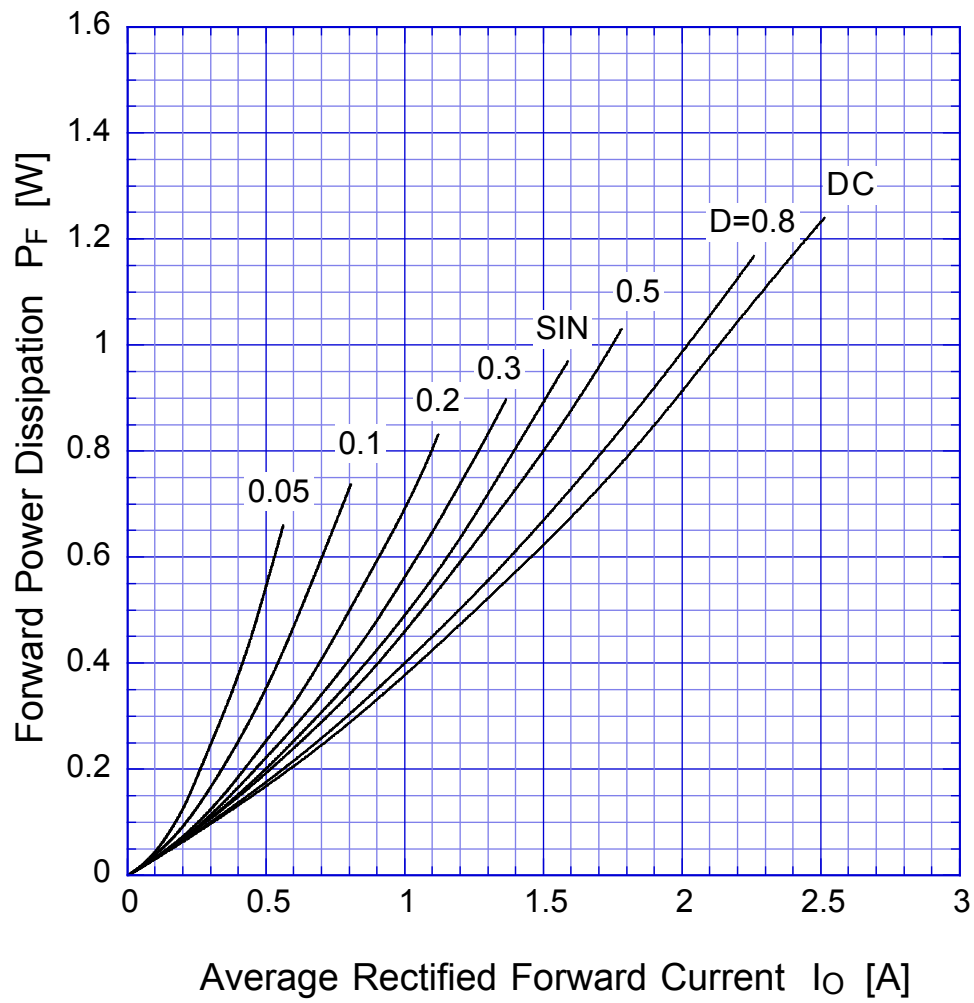


$T_j = 150^\circ\text{C}$

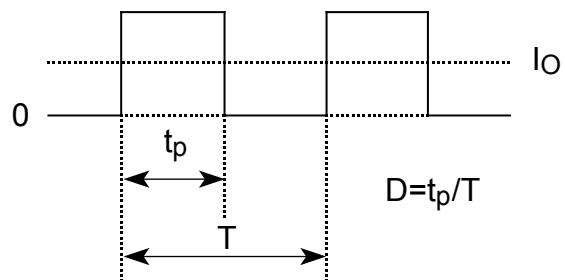


D2FS4

Derating Curve

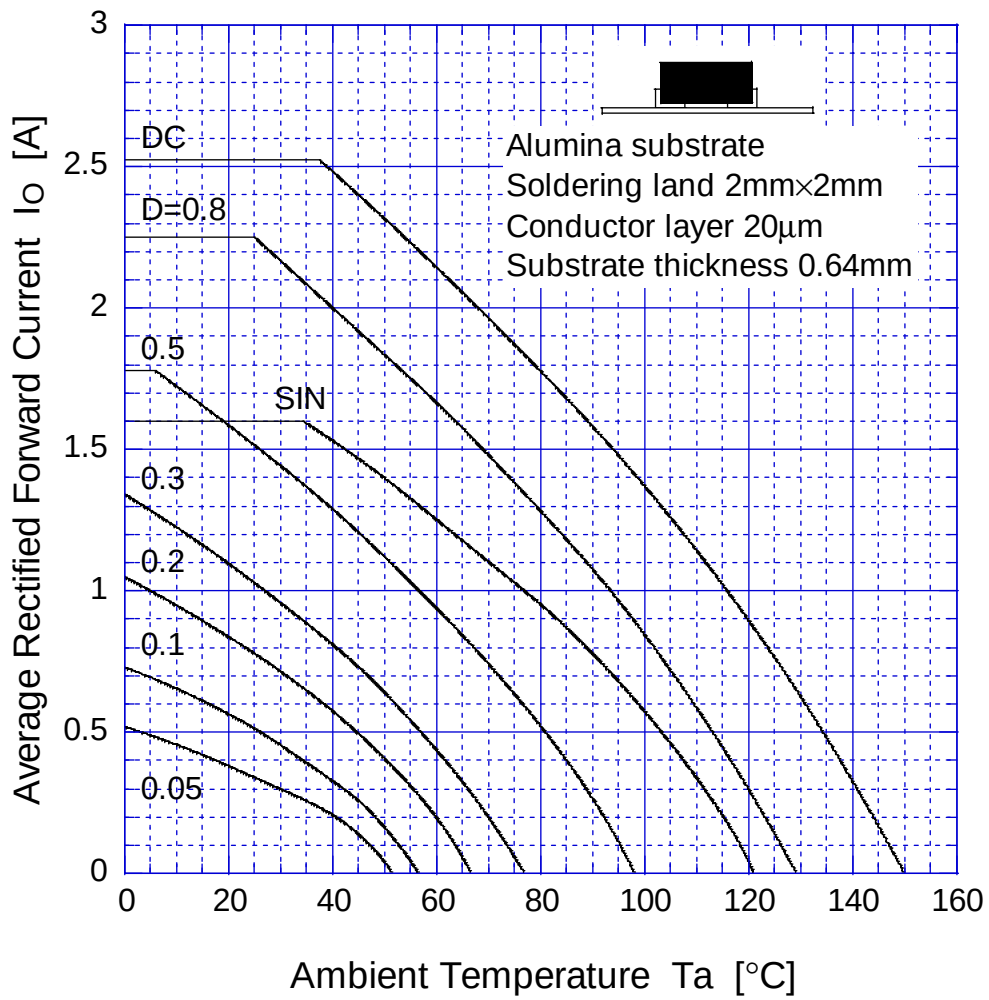


$V_R = 20V$

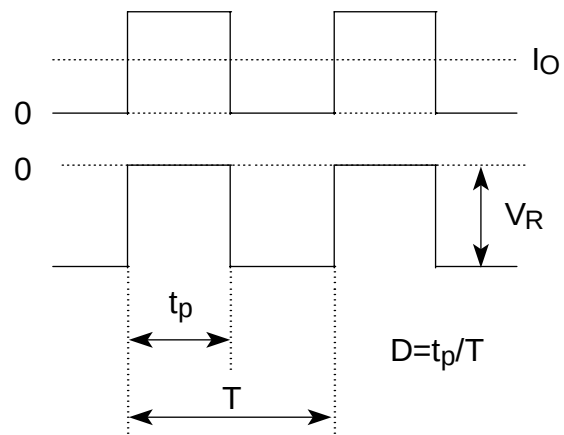


D2FS4

Derating Curve

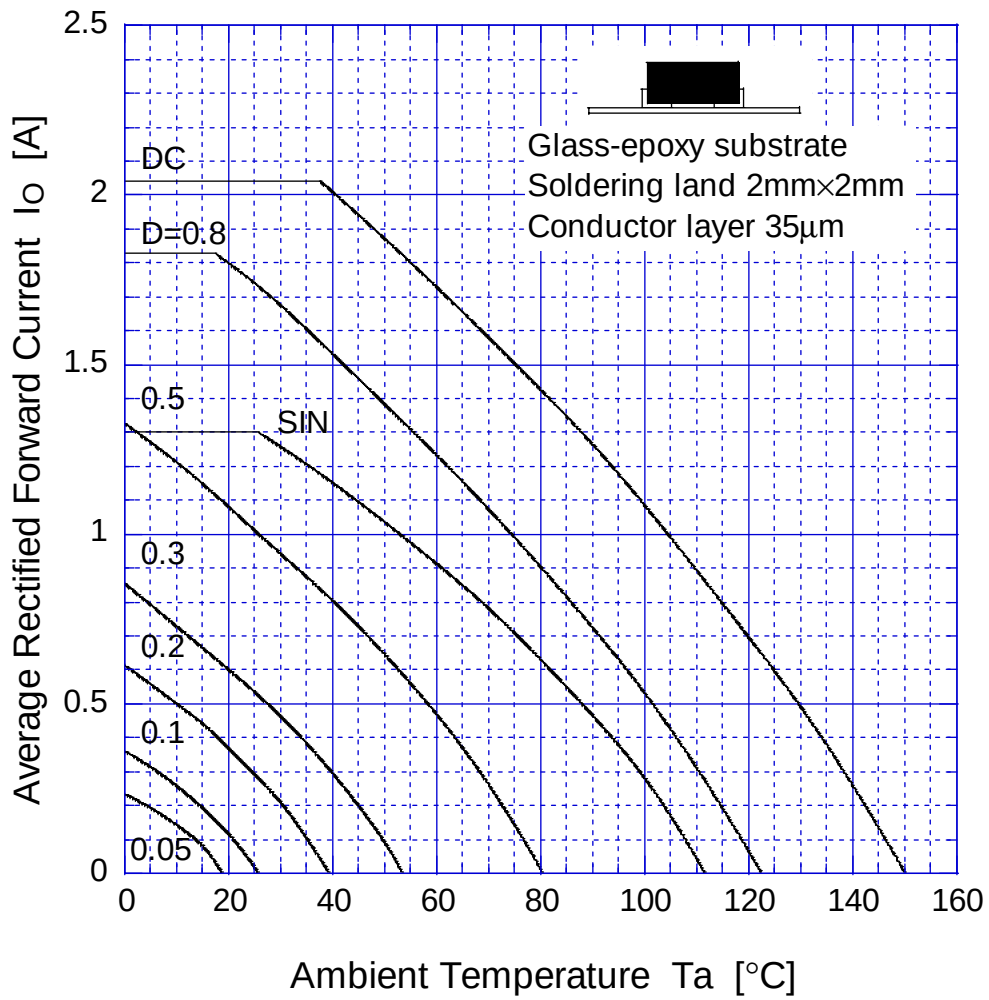


$V_R = 20V$

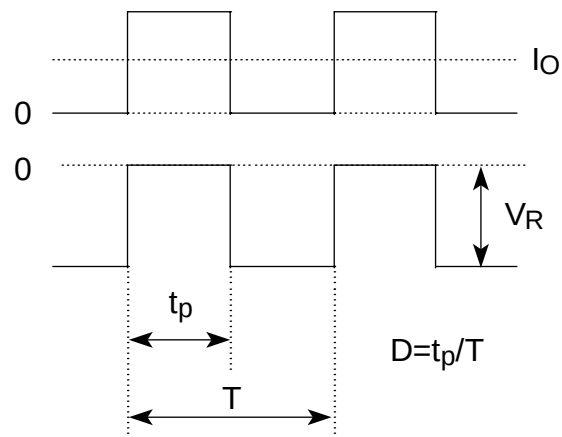

D2FS4

Peak Surge Forward Capability

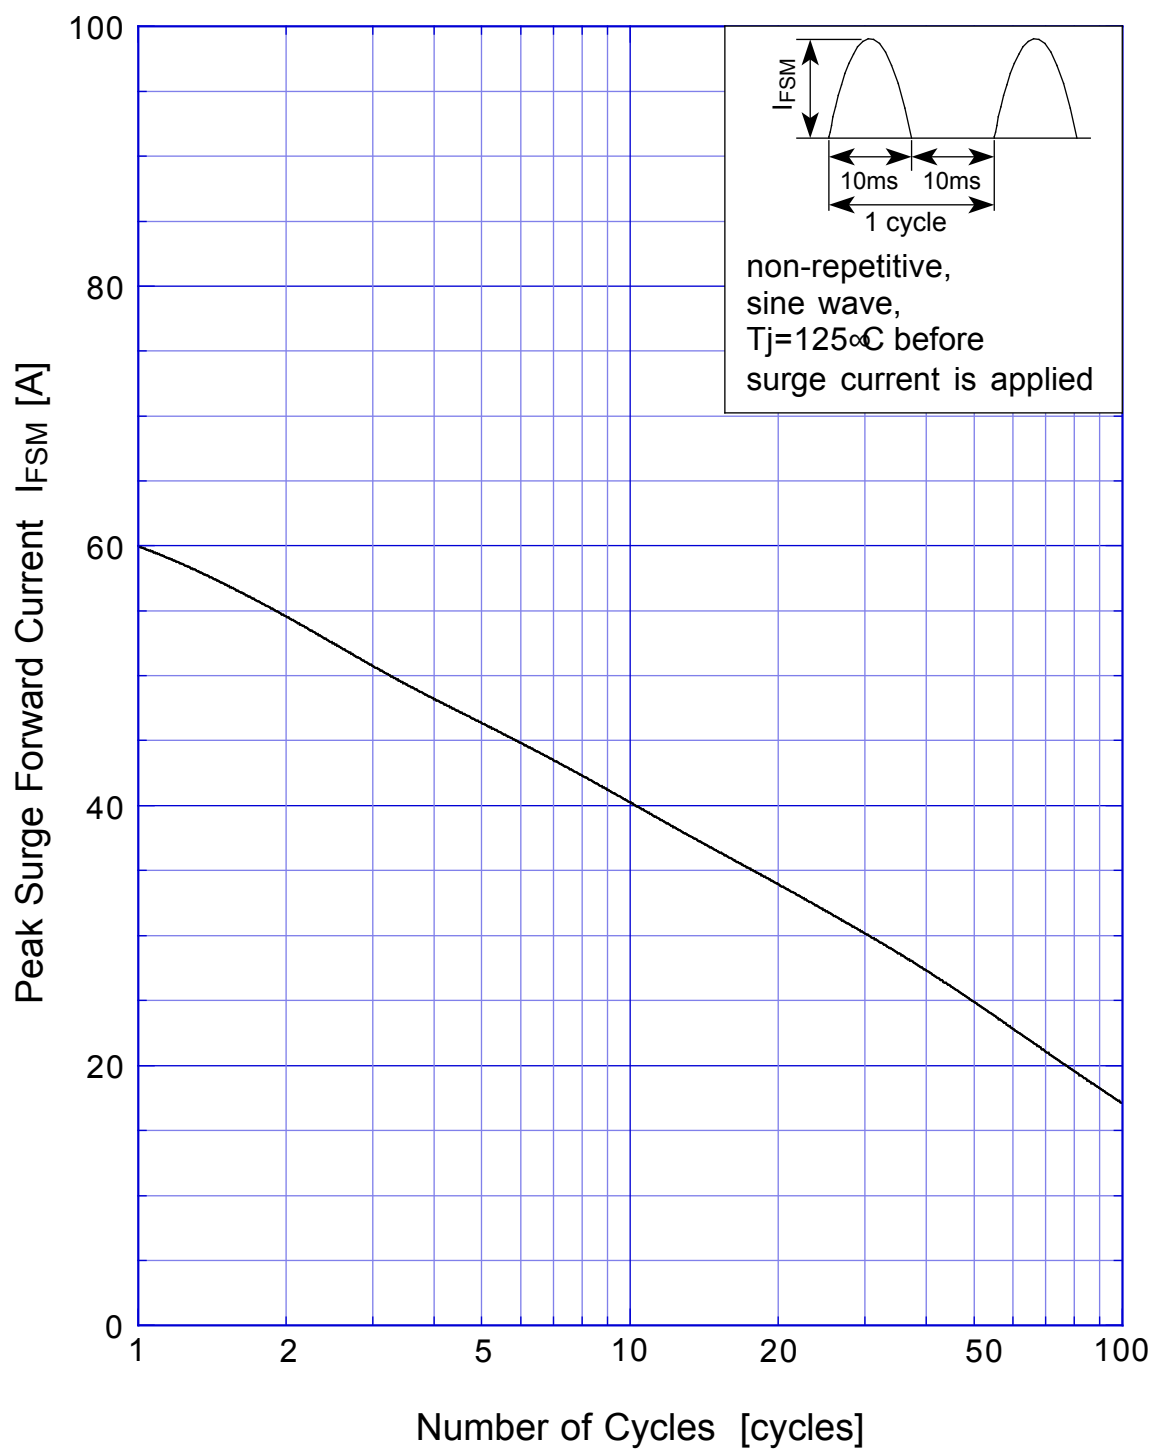

SBD Repetitive Surge Reverse Power Derating Curve

