

D5S4M

40V 5A

FEATURES

- $T_j 150^{\circ}\text{C}$
- P_{RRSM} avalanche guaranteed
- Fully Isolated Molding


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : ITO-220

Unit : mm

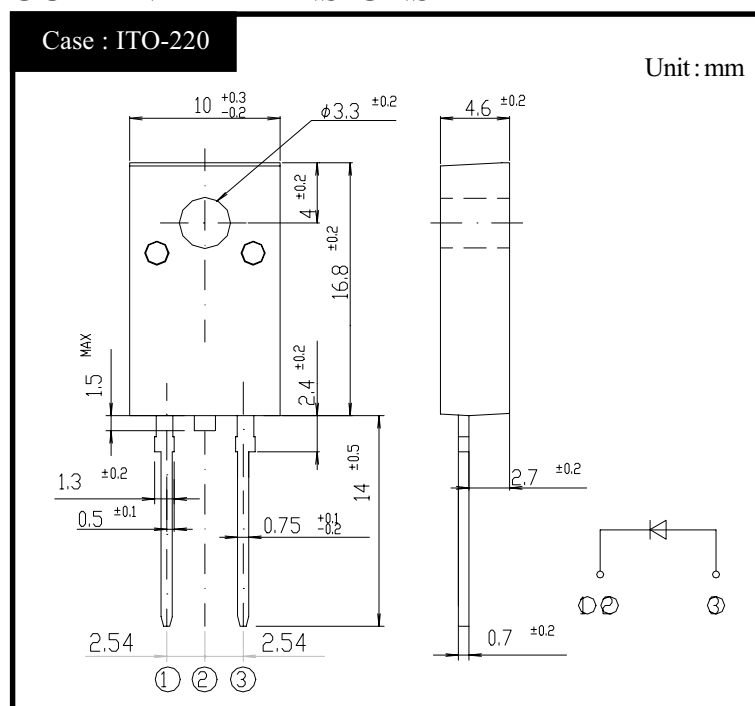

RATINGS

● Absolute Maximum Ratings (If not specified $T_c = 25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		$-40 \sim 150$	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Maximum Reverse Voltage	V_{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load, $T_c = 131^{\circ}\text{C}$	5	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j = 125^{\circ}\text{C}$	100	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μs , $T_j = 25^{\circ}\text{C}$	330	W
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	1.5	kV
Mounting Torque	TOR	(Recommended torque: 0.3N·m)	0.5	N·m

● Electrical Characteristics (If not specified $T_c = 25^{\circ}\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F = 5\text{A}$, Pulse measurement	Max 0.55	V
Reverse Current	I_R	$V_R = V_{RM}$, Pulse measurement	Max 3.5	mA
Junction Capacitance	C_j	$f = 1\text{MHz}$, $V_R = 10\text{V}$	Typ 180	pF
Thermal Resistance	θ_{jc}	junction to case	Max 4.5	$^{\circ}\text{C}/\text{W}$
	θ_{jf}	junction to heatsink (Reference value)	Max 6.0	


D5S4M

Forward Voltage

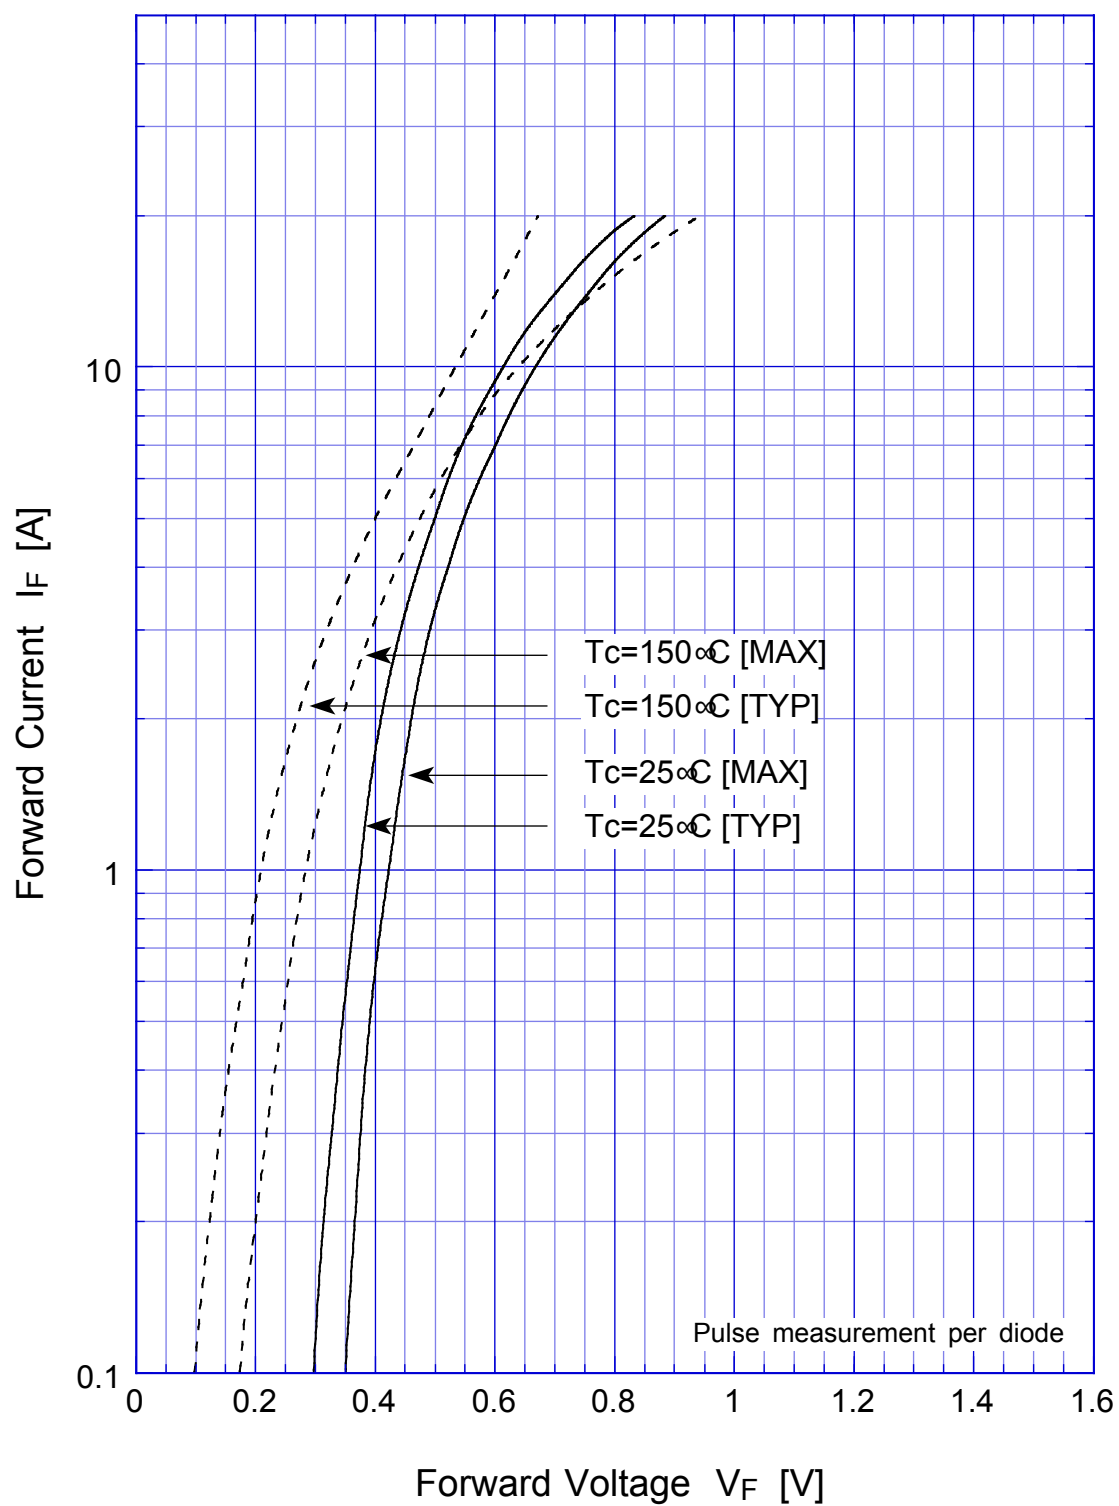

D5S4M


Junction Capacitance

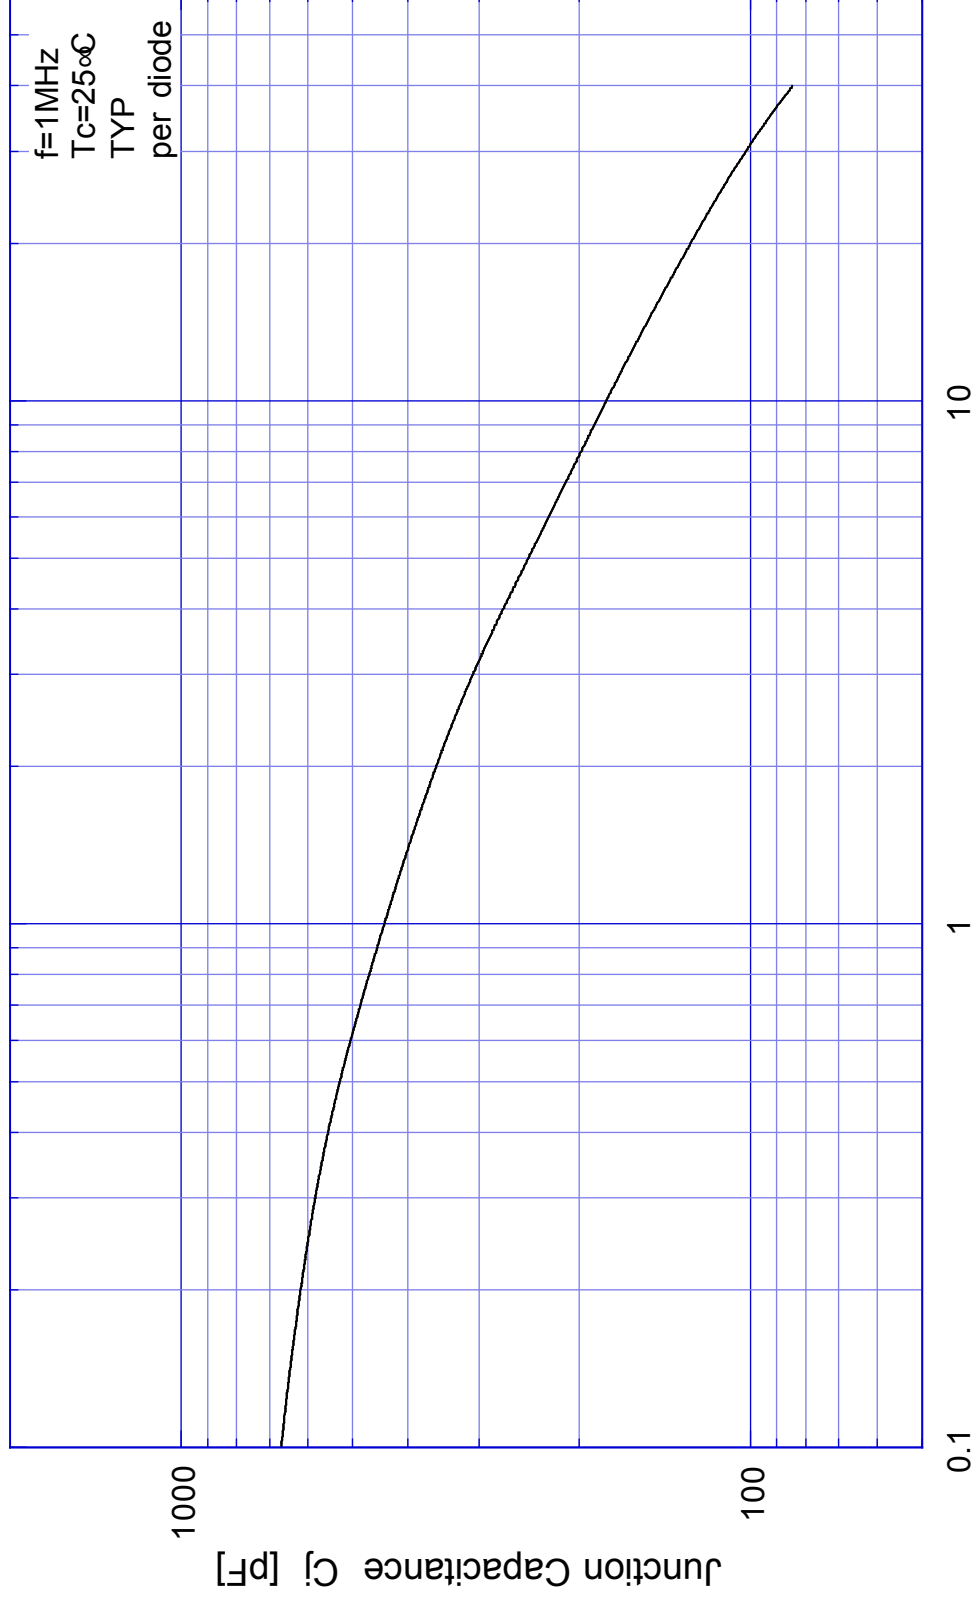

Reverse Voltage V_R [V]


D5S4M

Reverse Current

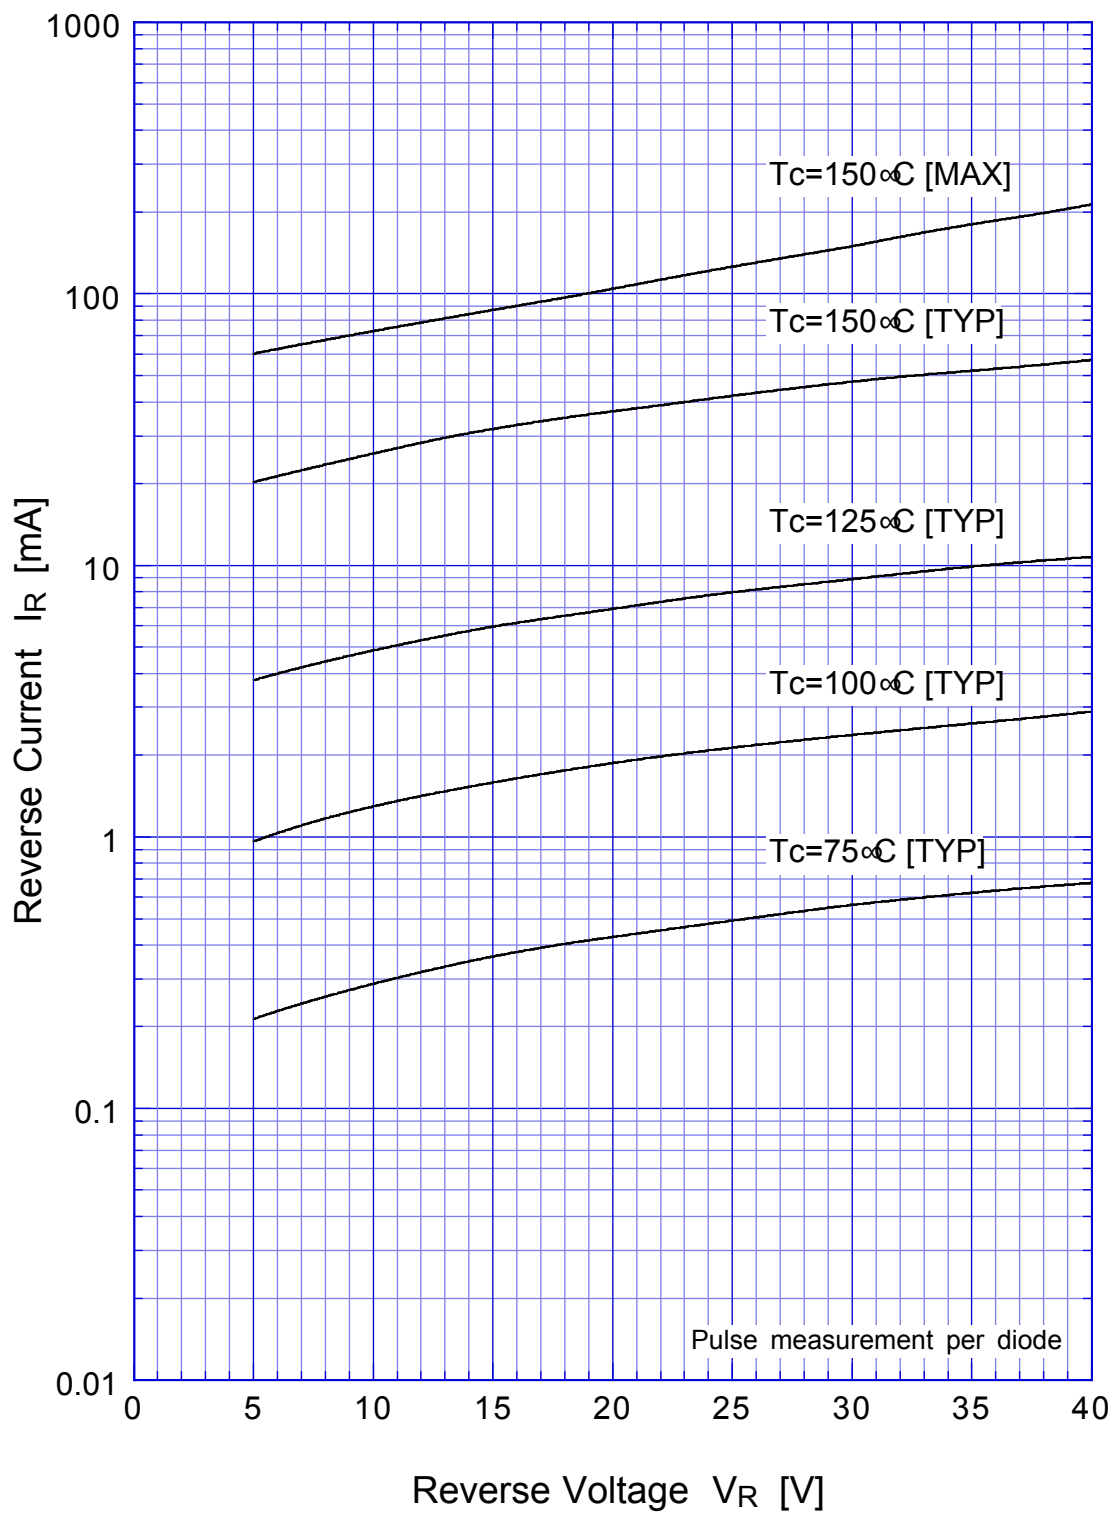


D5S4M

Reverse Power Dissipation

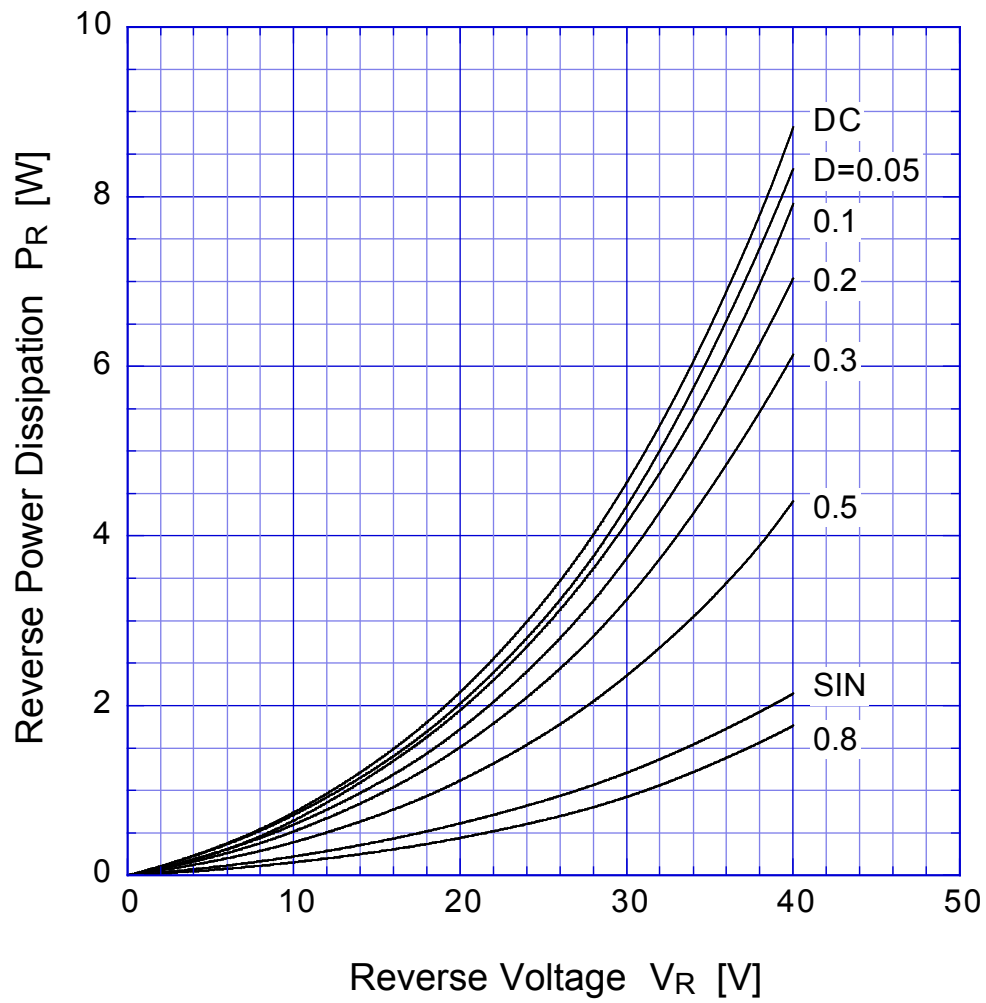


$T_j = 150^\circ\text{C}$

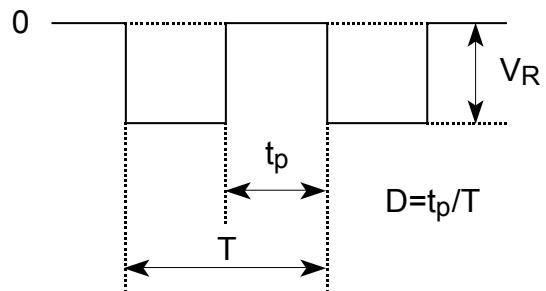

D5S4M

Forward Power Dissipation

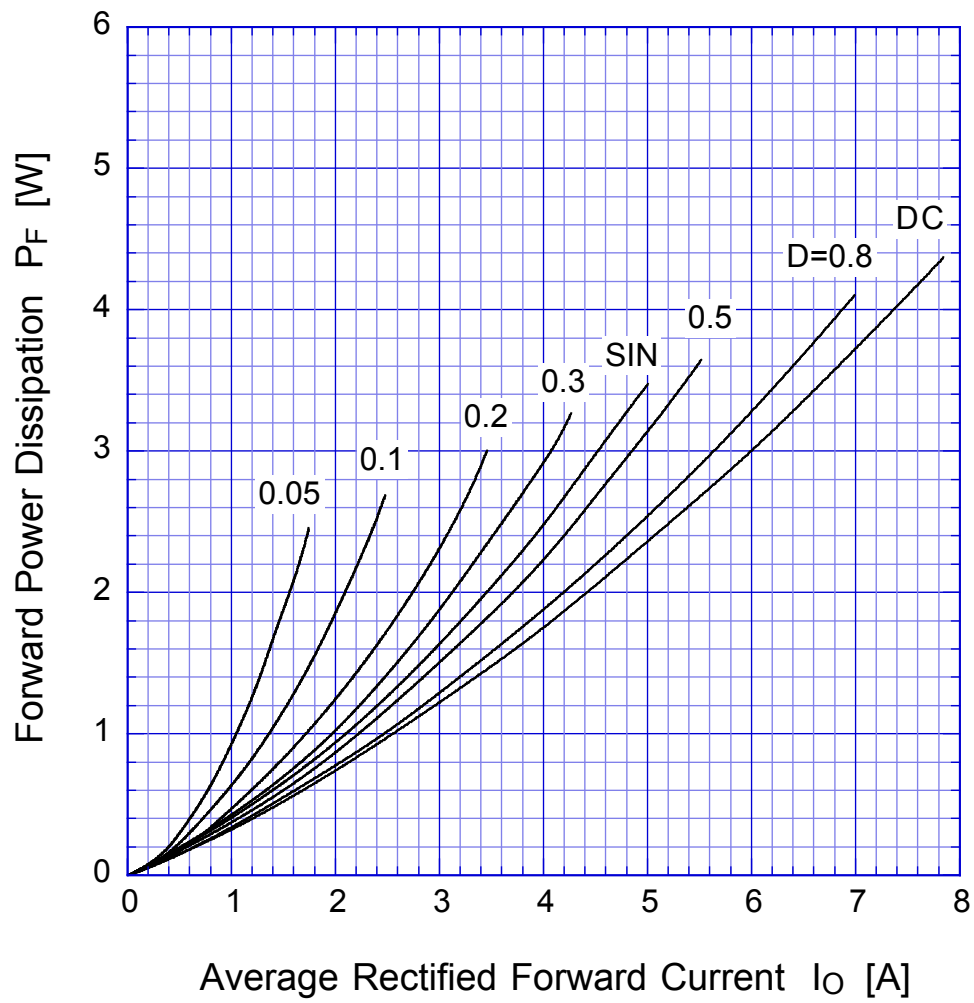


$T_j = 150^\circ\text{C}$



D5S4M

Derating Curve

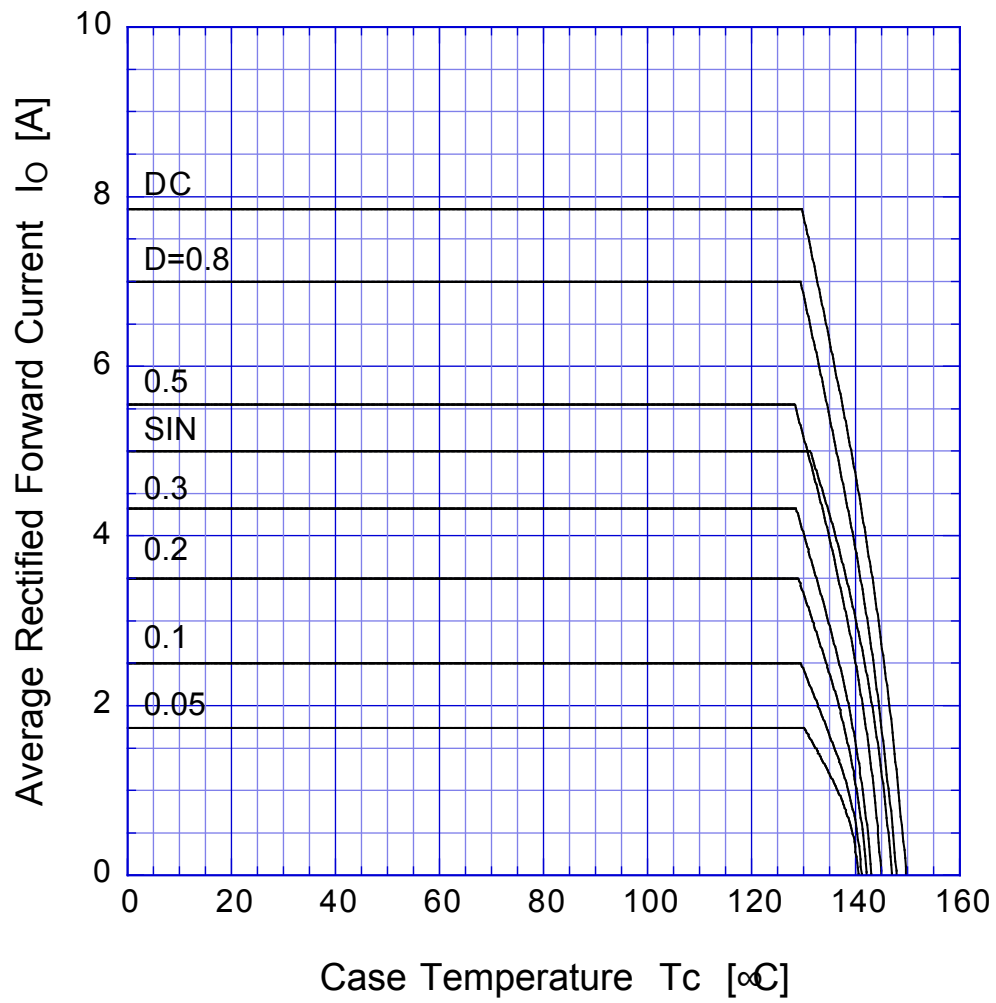


$V_R = 20V$



D5S4M

Peak Surge Forward Capability

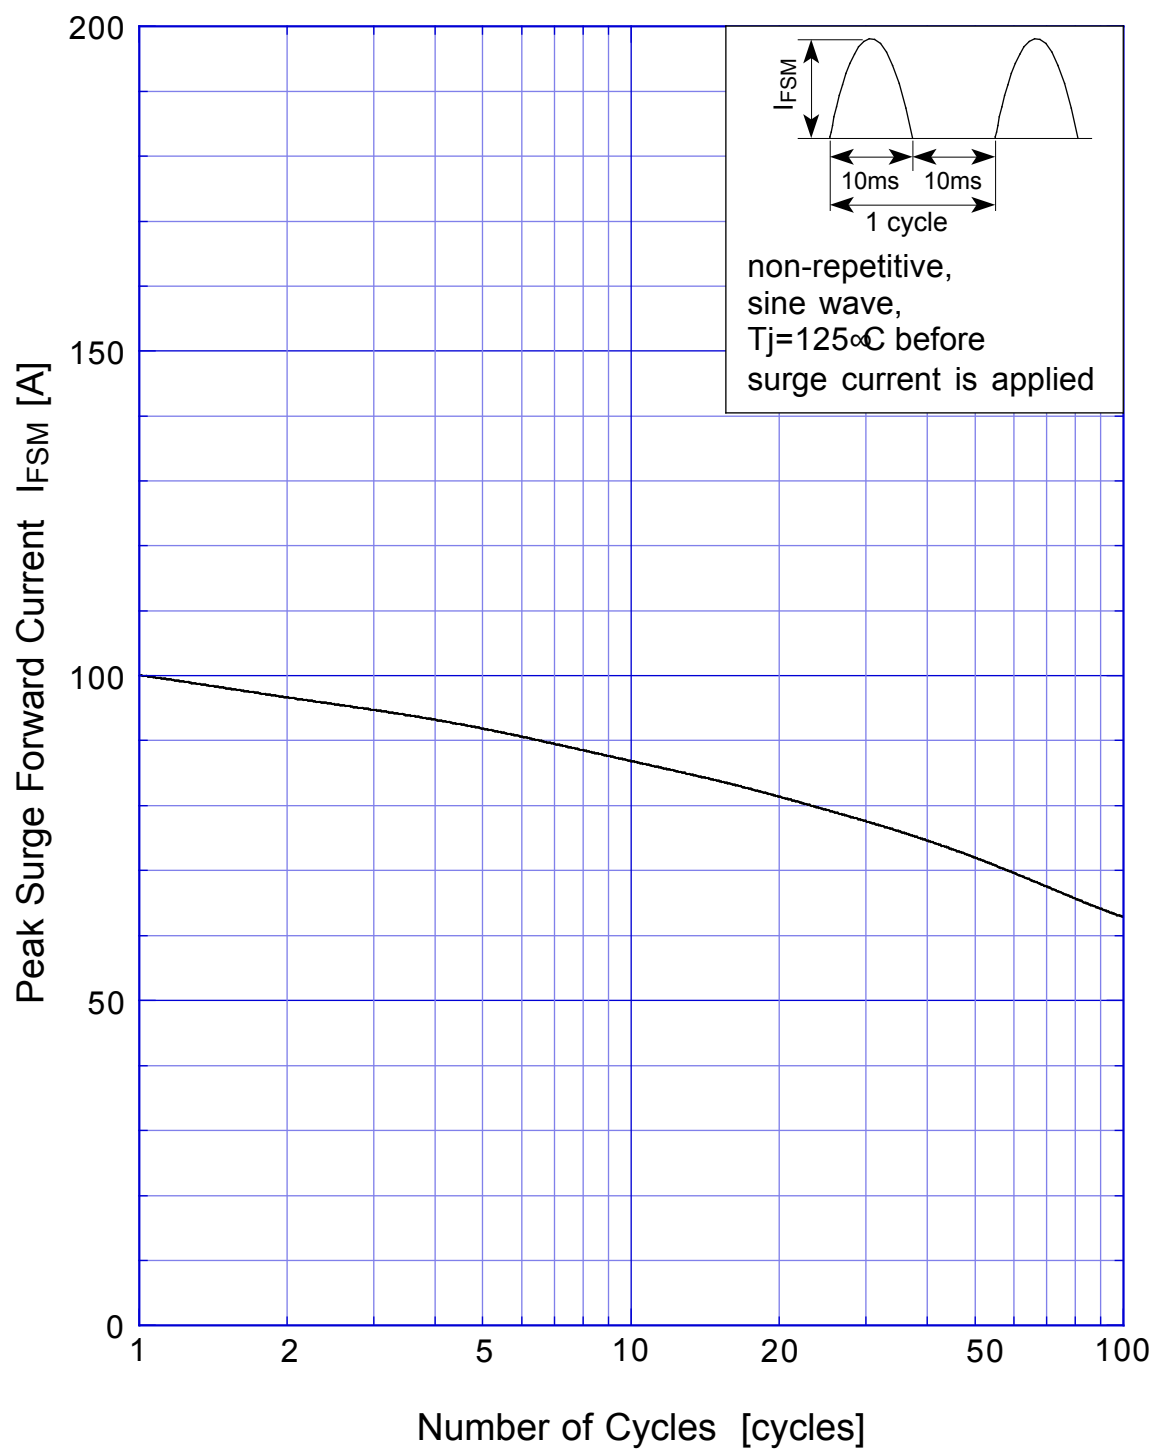

SBD Repetitive Surge Reverse Power Derating Curve



