

S1VBA60

600V 1A


FEATURES

- Small Single In-Line(:SIL)Package
- High IFSM
- Applicable to Automatic Insertion

APPLICATION

- Switching power supply
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

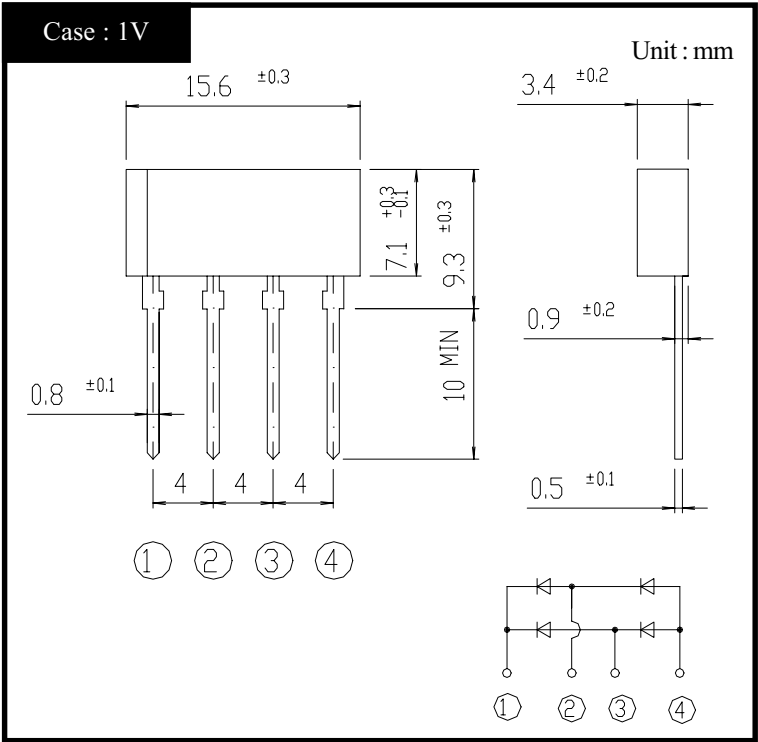

RATINGS

●Absolute Maximum Ratings (If not specified Tl=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40~150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, On glass-epoxy substrate, Ta=25°C	1	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, Tj=25°C	50	A
Current Squared Time	I ² t	1ms≤t<10ms Tj=25°C	10	A ² s

●Electrical Characteristics (If not specified Tl=25°C)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	If=0.5A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ _{jl}	junction to lead	Max.16	°C/W
	θ _{ja}	junction to ambient	Max.62	


S1VBAx

Forward Voltage

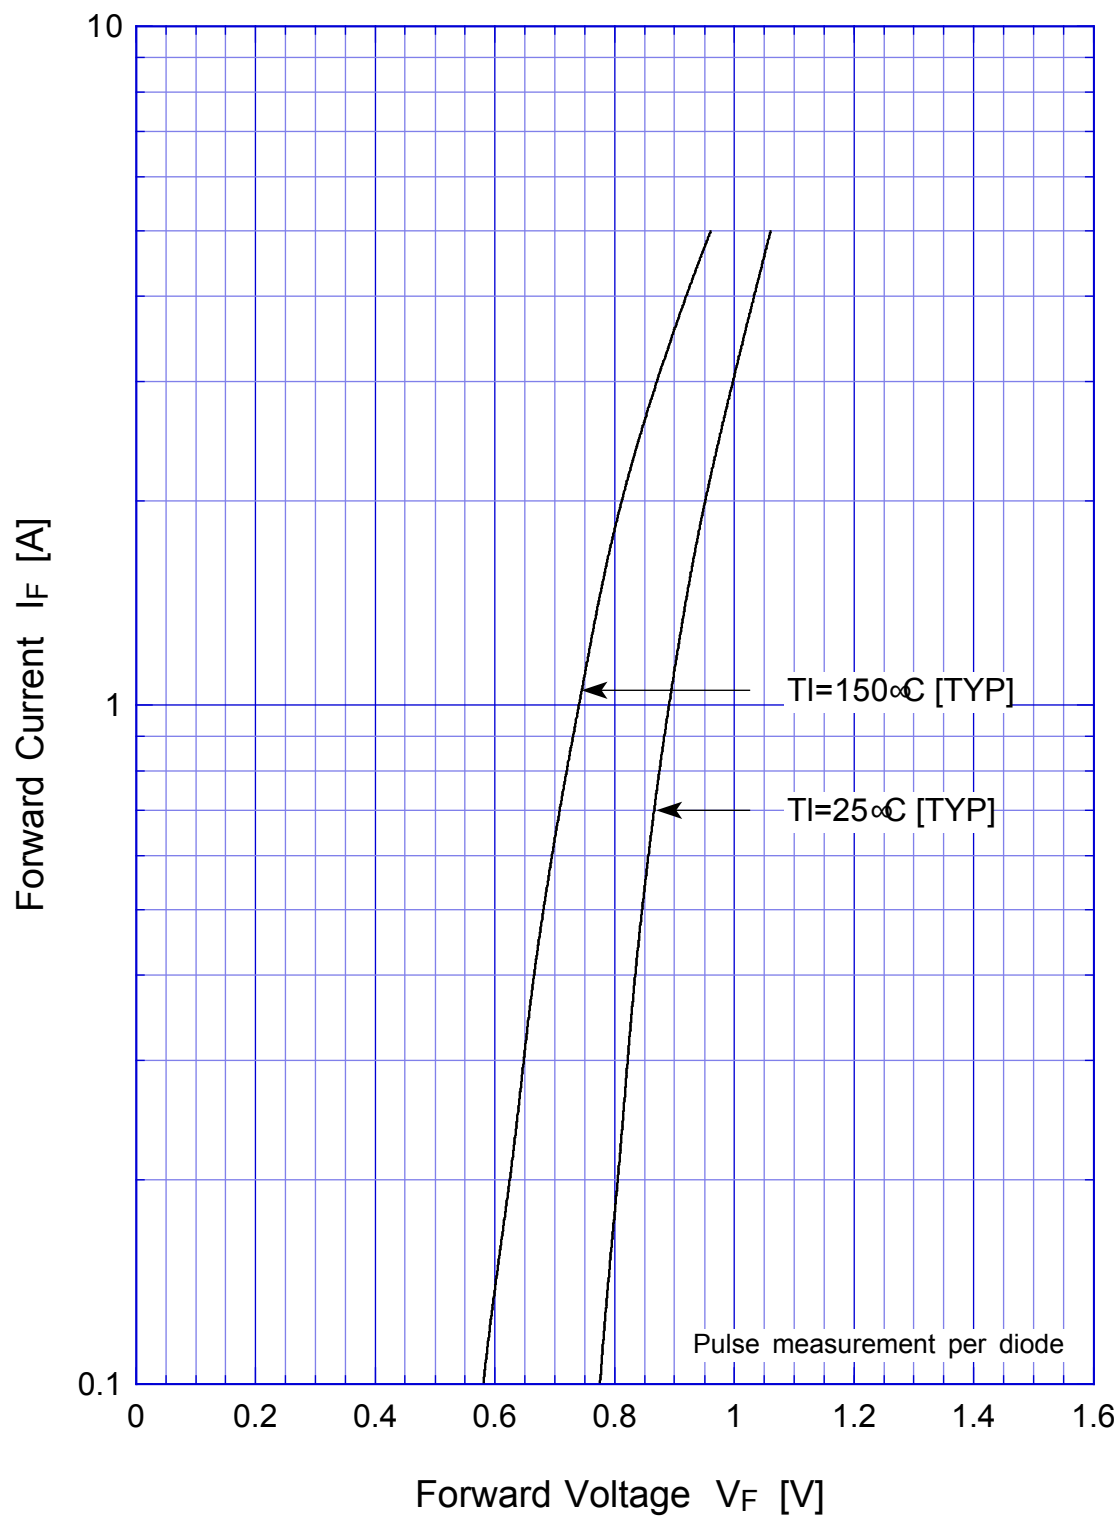

S1VBAx

Forward Power Dissipation

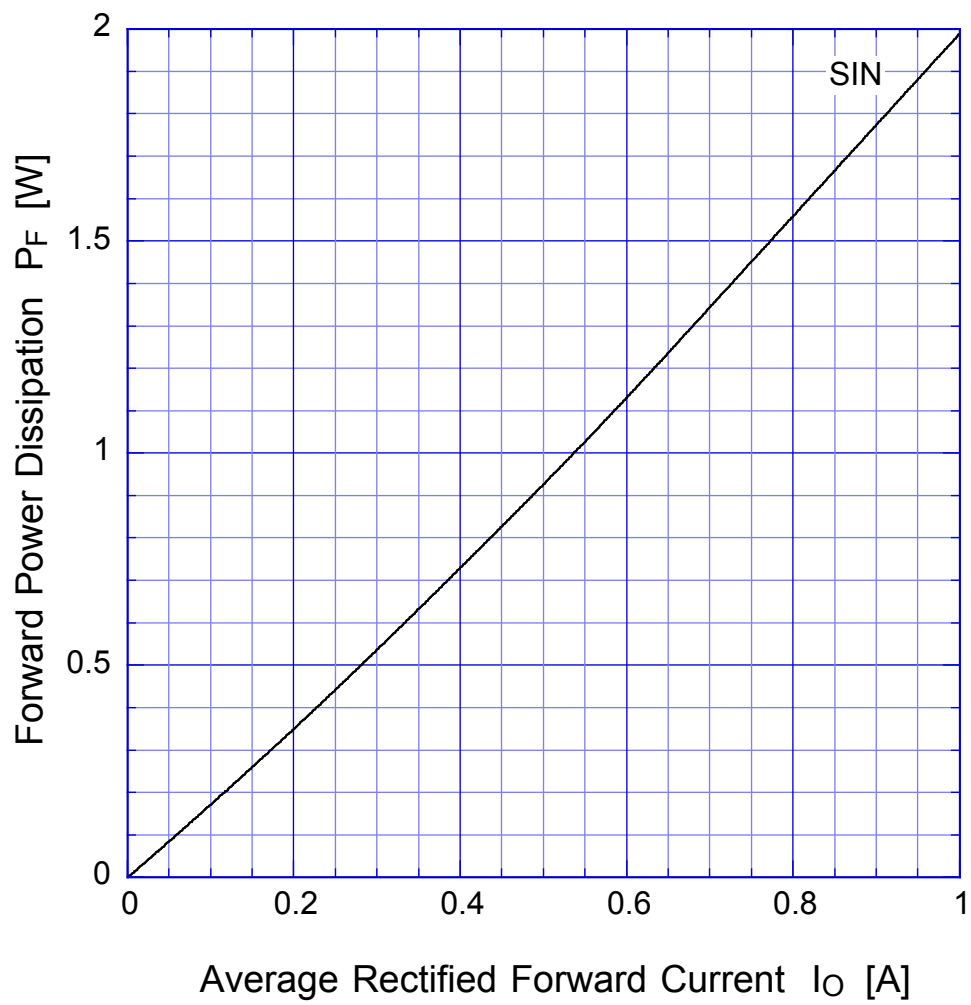


$T_j = 150^{\circ}\text{C}$

Sine wave

S1VBAx

Derating Curve

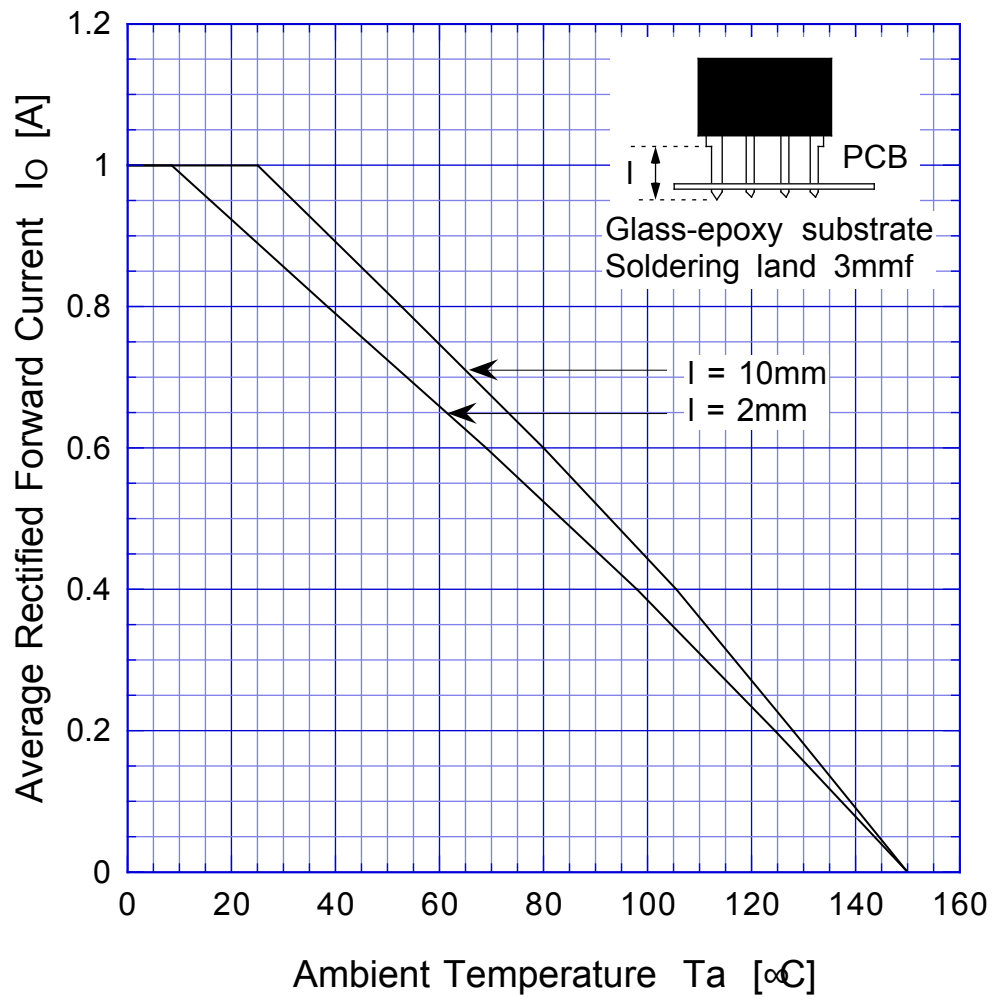

$V_R = V_{RM}$

Sine wave

R-load

Free in air

S1VBAx

Peak Surge Forward Capability

