


SF10L60U

600V 10A

OUTLINE DIMENSIONS

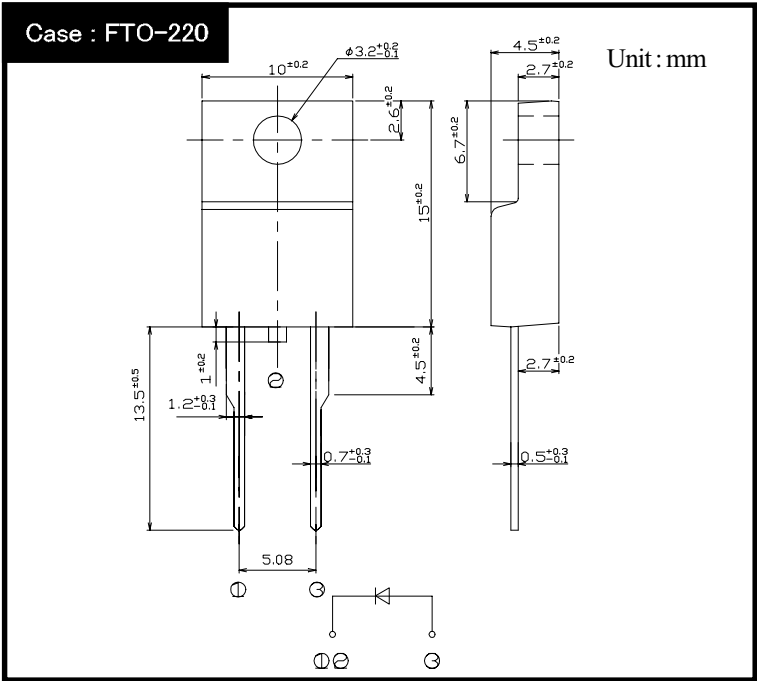

RATINGS

●Absolute Maximum Ratings (If not specified $T_c=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		$-55\sim 150$	$^{\circ}\text{C}$
Operating Junction Temperature	T_j		150	$^{\circ}\text{C}$
Peak Reverse Voltage	V_{RM}		600	V
Average Rectified Forward Current	I_o	50Hz sine wave, resistance load, $T_c=85^{\circ}\text{C}$	10	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^{\circ}\text{C}$	120	A
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque)	0.5(0.3)	N·m

●Electrical Characteristics (If not specified $T_c=25^{\circ}\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=10\text{A}$, Pulse measurement	Max.3.0	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.25	μA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$	Typ.55	pF
Reverse Recovery Time	t_{rr}	$I_F=0.5\text{A}$, $I_R=1\text{A}$	Max.25	ns
Thermal Resistance	θ_{jc}	junction to case	Max.2.0	$^{\circ}\text{C}/\text{W}$

SF10L60U


Forward Voltage

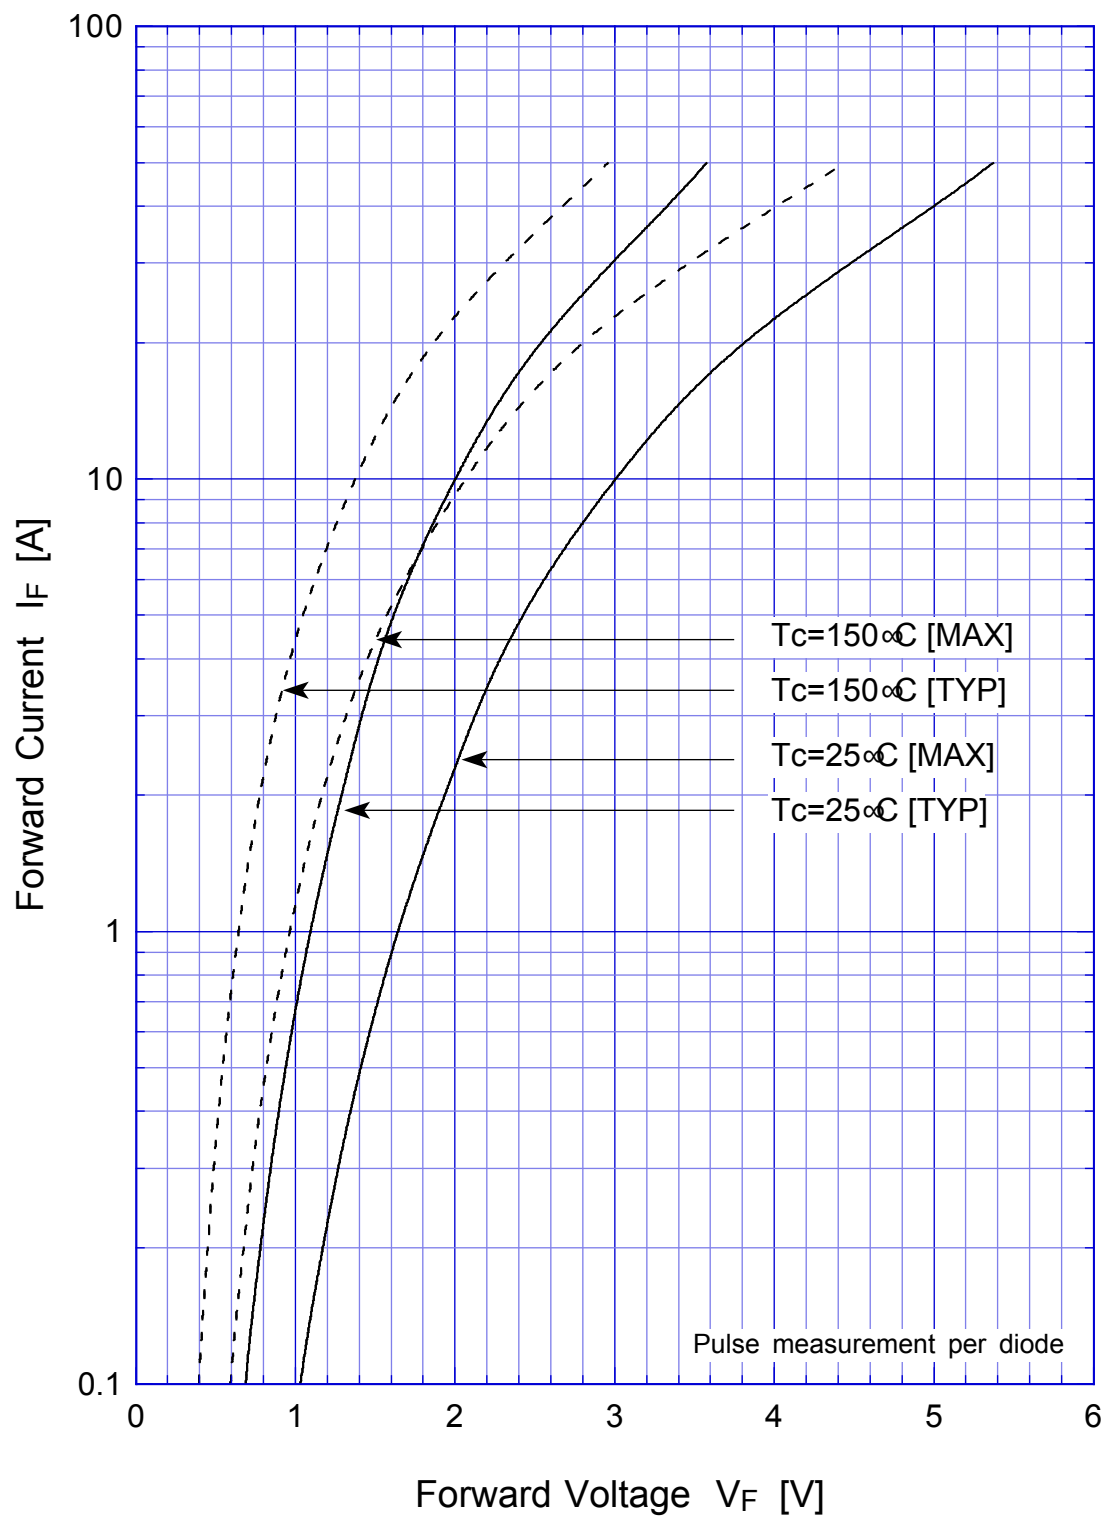

SF10L60U Forward Power Dissipation

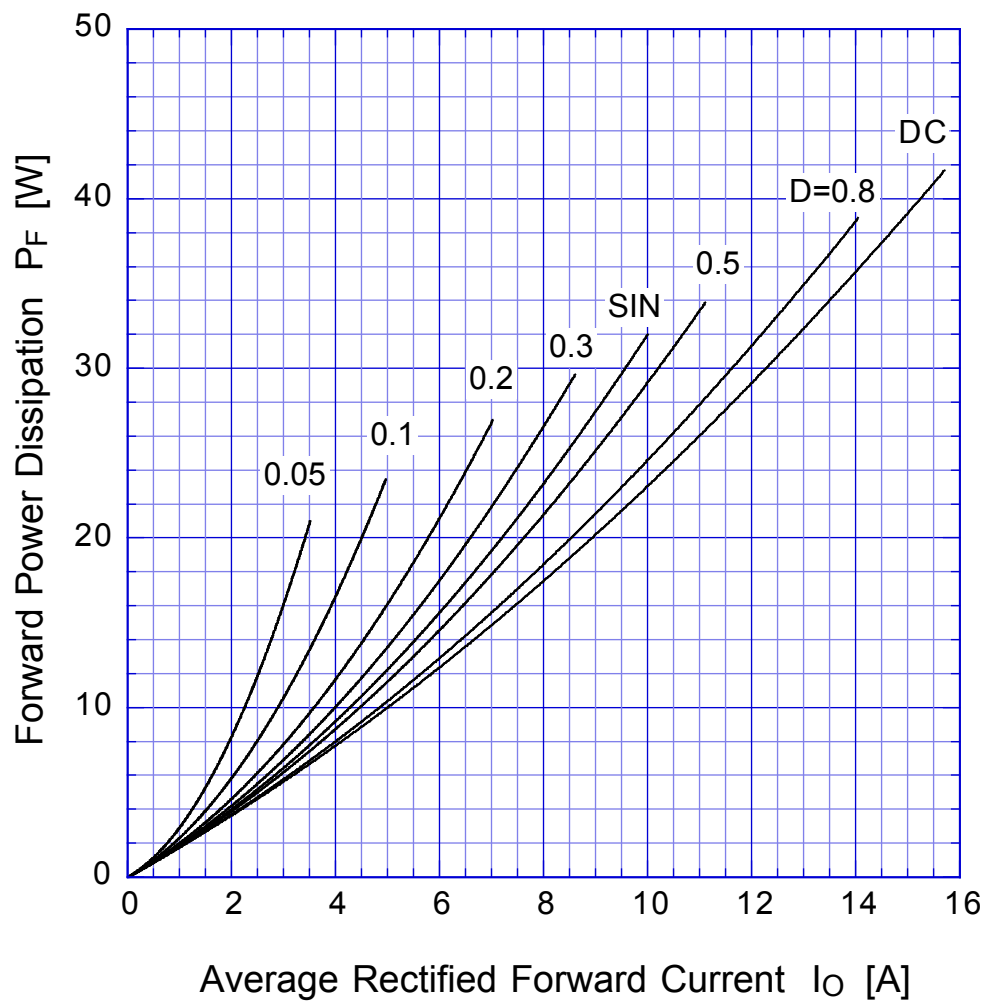


$T_j = 150^\circ\text{C}$

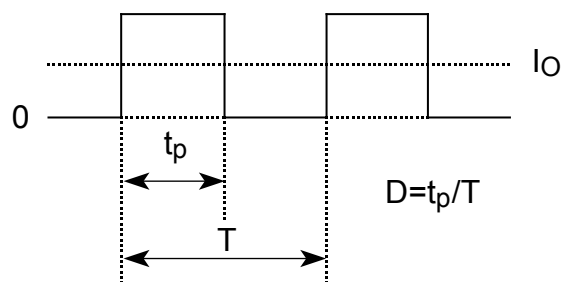


SF10L60U


Derating Curve

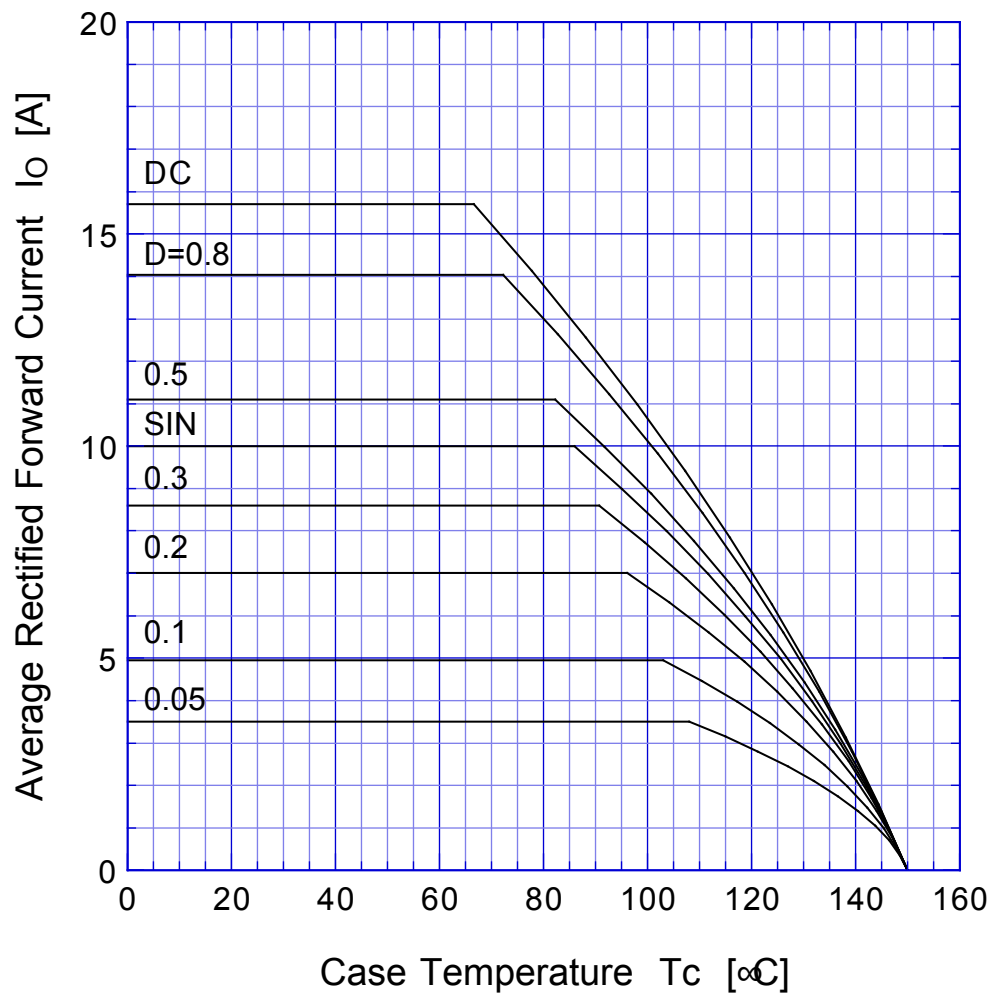

$$V_R = V_{RM}$$

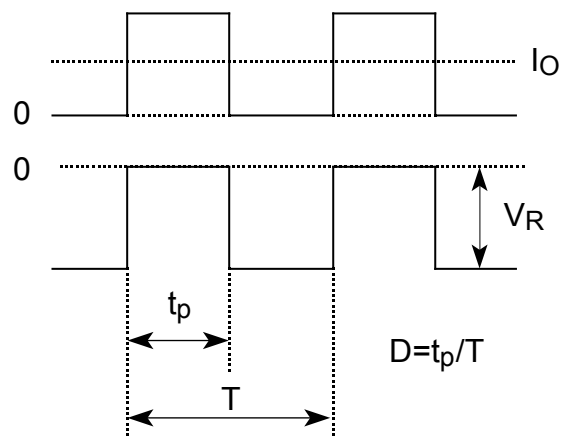

SF10L60U Peak Surge Forward Capability

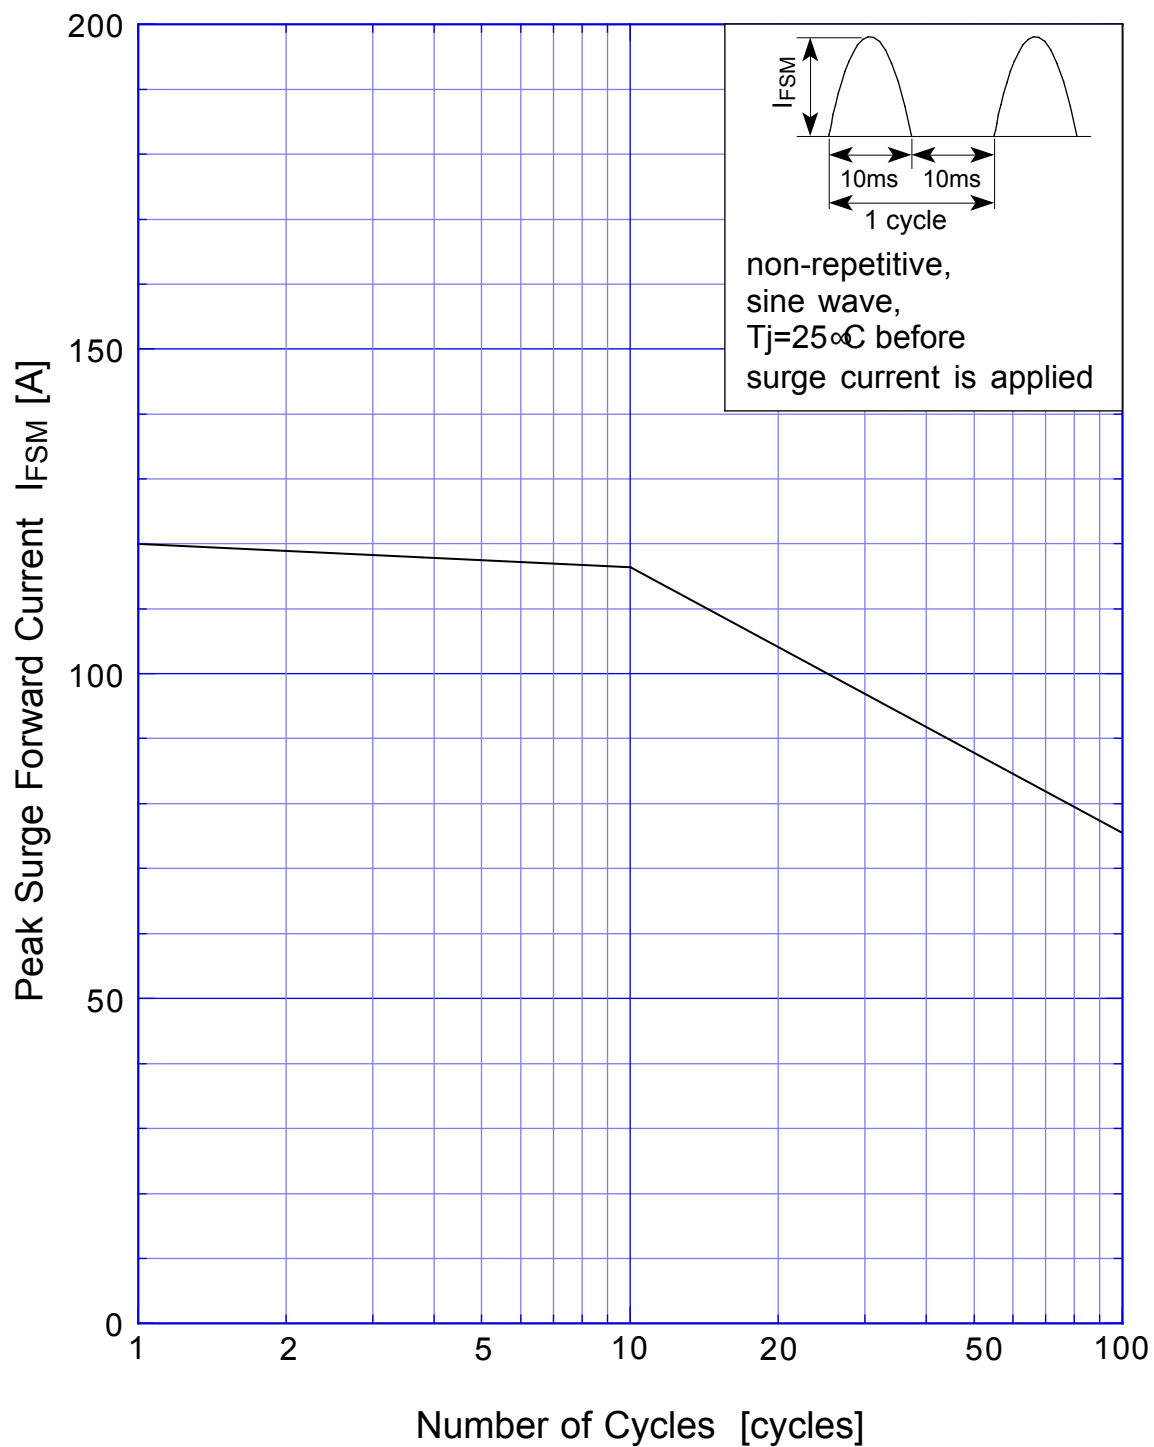

SF10L60U Junction Capacitance

