
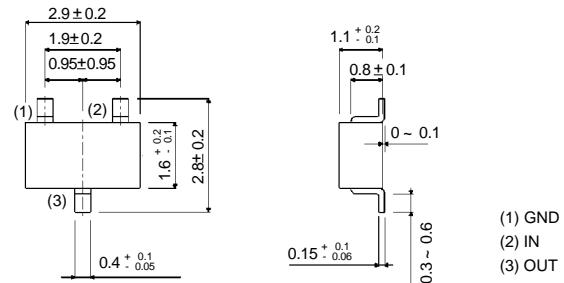


Digital transistors (built-in resistors)

- **Features**

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- 2) The bias resistors consist of thinfilm resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- 3) Only the on/ off conditions need to be set for operation, making device design easy.

- **Equivalent circuit**



All terminals have same dimensions

DTC123EKA

EIAJ: SC—59

- Absolute maximum ratings($T_a=25^{\circ}\text{C}$)

Parameter	symbol	limits		unit
Supply voltage	V_{cc}	-50		V
Input voltage	V_{IN}	-10~+12		V
Output current	I_o	100		mA
	$I_{C(\text{Max.})}$	100		
Power dissipation	P_d	200		mW
Junction temperature	T_j	150		°C
Storage temperature	T_{stg}	-55~+150		°C


- Electrical characteristics($T_a=25^{\circ}\text{C}$)

Parameter	symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(\text{off})}$	—	—	-0.5	V	$V_{cc}= 5\text{V}, I_o= 100 \mu\text{A}$
	$V_{I(\text{on})}$	3	—	—		$V_o= 0.3\text{V}, I_o= 20 \text{mA}$
Output Voltage	$V_{O(\text{on})}$	—	0.1	0.3	V	$I_o/I_i= 10\text{mA} / 0.5\text{mA}$
Input current	I_i	—	—	3.8	mA	$V_i= 5\text{V}$
Output current	$I_{O(\text{off})}$	—	—	0.5	μA	$V_{cc}= 50 \text{V}, V_i= 0 \text{V}$
DC current gain	G_i	20	—	—	—	$V_o= 5\text{V}, I_o= 20\text{mA}$
Input resistance	R_i	1.54	2.2	2.86	KΩ	—
Resistance ratio	R_2 / R_1	0.8	1	1.2	—	—
Transition frequency	f_T	—	250	—	MHz	$V_{ce}= 10\text{V}, I_e= -5 \text{mA}, f=100\text{MHz}^*$


*Transition frequency of the device

DTC123EKA

ELECTRICAL CHARACTERISTIC CURVES

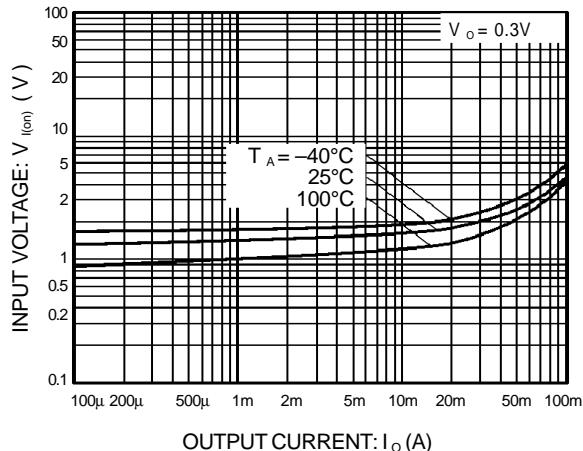

**Figure 1. Input voltage vs.output current
(ON characteristics)**

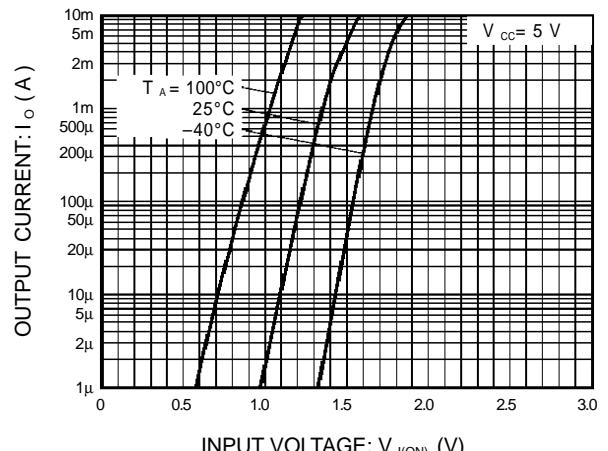

**Figure 2. Output current vs.input voltage
(OFF characteristics)**

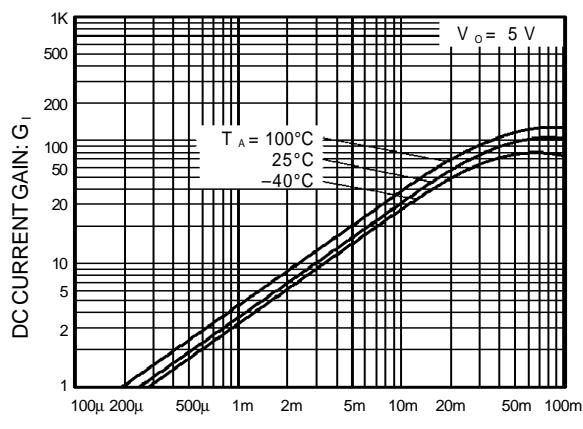


Figure 3. DC current gain vs.output current

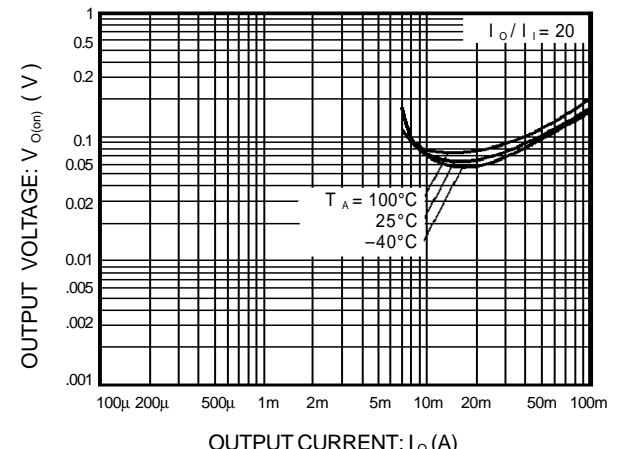


Figure 4. Output voltage vs.output current