

CDBL120L Thru CDBL140L

Reverse Voltage: 20 - 40 Volts

Forward Current: 1.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Guard Ring Protection
- Low Forward voltage and power loss for high efficiency

Mechanical data

- Case: DO-213AB molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.116 gram

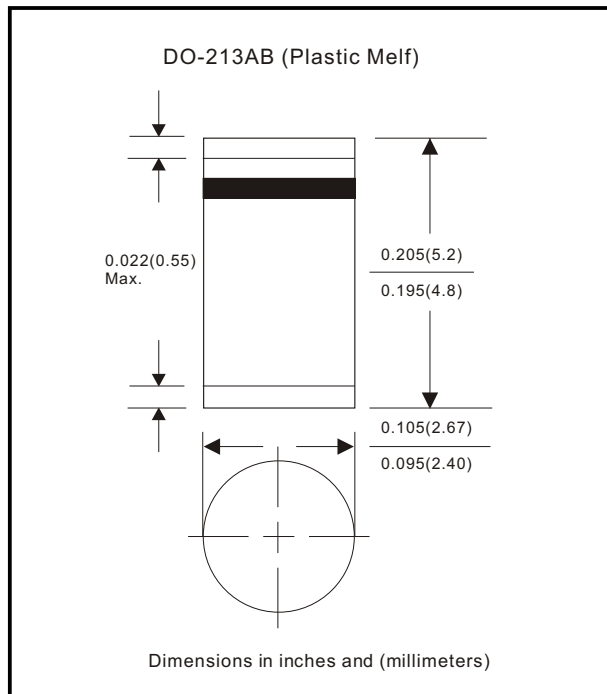

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBL120L	CDBL140L	Unit
Max. Repetitive Peak Reverse Voltage	V _{RRM}	20	40	V
Max. DC Blocking Voltage	V _{DC}	20	40	V
Max. RMS Voltage	V _{RMS}	14	28	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30		A
Max. Average Forward Current	I _O	1.0		A
Max. Instantaneous Forward Current at 1.0 A	V _F	0.38	0.40	V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C	I _R	0.5 10		mA
Max. Thermal Resistance (Note 1)	R _{θJA} R _{θJT}	75 35		°C/W
Operating Junction Temperature	T _j	-55 to +125		°C
Storage Temperature	T _{STG}	-55 to +150		°C

Note 1: Thermal resistance from junction to ambient and junction to terminals.

Rating and Characteristic Curves (CDBL120L Thru CDBL140:L)

Fig. 1 - Reverse Characteristics

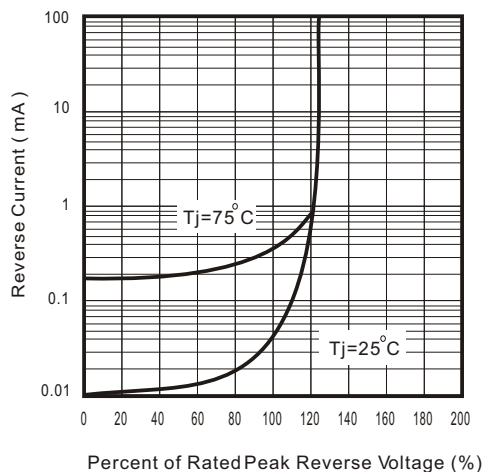


Fig.2 - Forward Characteristics

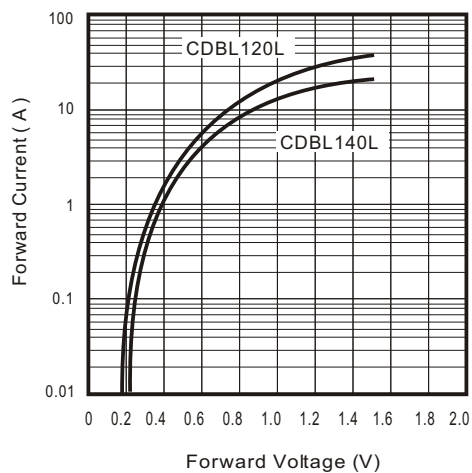


Fig. 3 - Junction Capacitance

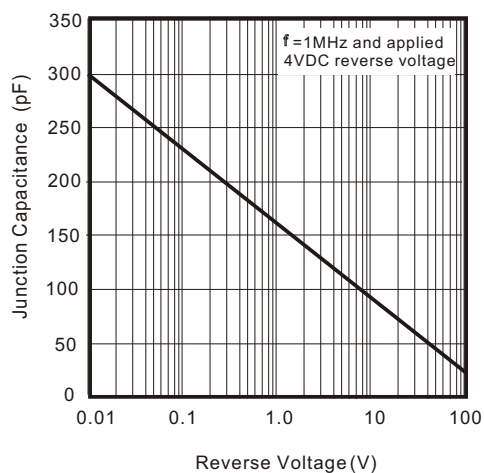


Fig. 4 - Current Derating Curve

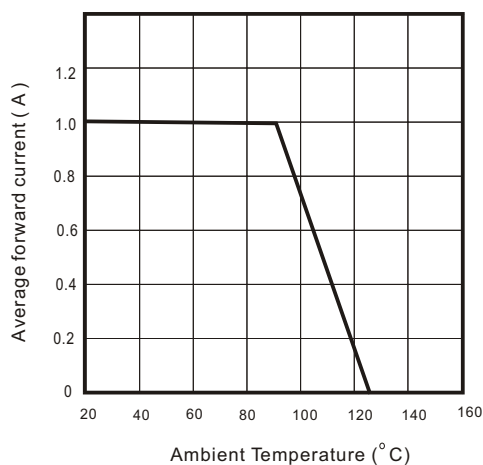


Fig. 5 - Non repetitive Forward Surge Current

