
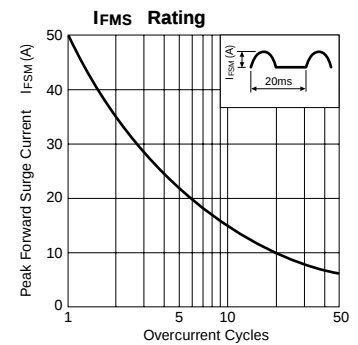
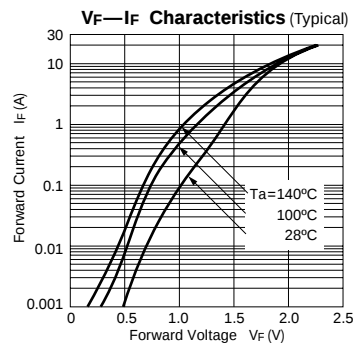





Damper Diodes (For Display)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)								Others	
	V _{RM} (V)	I _{F(AV)} (A) () is with Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V) max	I _F (A) V _R =V _{RM} max	I _R (μA) V _R =V _{RM} Ta=100°C max	t _{rr} ① (μs) I _F /I _{RP} (mA)	t _{rr} ② (μs) I _F /I _{RP} (mA)	R _{th} (j-ℓ) (°C/W)	Mass (g)	Fig.		
RU 4D	1300	1.2 (1.5)	50	-40 to +150		1.8	50	500	0.4	500/500	0.18	500/1000	8.0	1.2	Ⓐ
RU 4DS		3.0													
RP 3F	1500	2.0									1.7	2.0			




RU 4D



RU 4DS

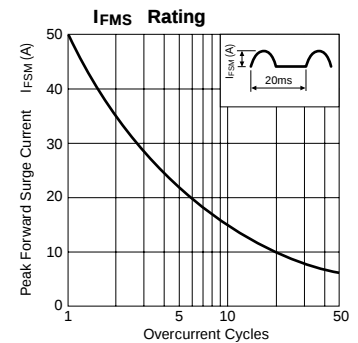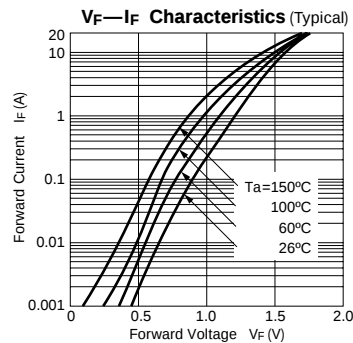

RP 3F

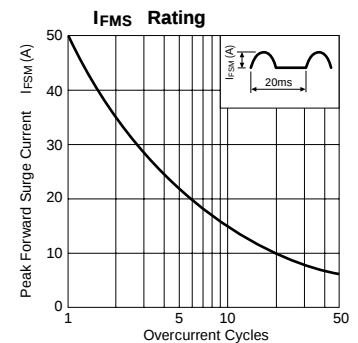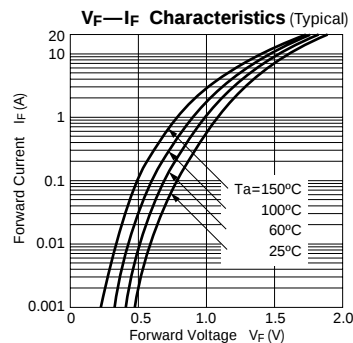

External Dimensions

(Unit: mm) (Full-mold)

Flammability:
UL94V-0 or Equivalent

