

# ZXMN3B04N8

---

## 30V N-CHANNEL ENHANCEMENT MODE MOSFET 2.5V GATE DRIVE


---

### SUMMARY

$V_{(BR)DSS}=30V$  ;  $R_{DS(on)}=0.025\Omega$ ;  $I_D= 8.9A$

### DESCRIPTION

This new generation of Trench MOSFETs from Zetex utilizes a unique structure that combines the benefits of low on-resistance with fast switching speed. This makes them ideal for high efficiency, low voltage, power management applications.




SO8

### FEATURES

- Low on-resistance
- Fast switching speed
- Low threshold
- Low gate drive
- Low profile SOIC package


### APPLICATIONS

- DC - DC Converters
- Power Management Functions
- Disconnect switches
- Motor control



### ORDERING INFORMATION

DEVICE	REEL SIZE	TAPE WIDTH	QUANTITY PER REEL
ZXMN3B04N8TA	7"	12mm	500 units
ZXMN3B04N8TC	13"	12mm	2500 units



Top View

### DEVICE MARKING

- ZXMN  
3B04

# ZXMN3B04N8

## ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	$V_{DSS}$	30	V
Gate Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current @ $V_{GS}=4.5V$ ; $T_A=25^\circ C$ <sup>(b)</sup> @ $V_{GS}=4.5V$ ; $T_A=70^\circ C$ <sup>(b)</sup> @ $V_{GS}=4.5V$ ; $T_A=25^\circ C$ <sup>(a)</sup>	$I_D$	8.9	A
		7.3	A
		7.2	A
Pulsed Drain Current <sup>(c)</sup>	$I_{DM}$	45	A
Continuous Source Current (Body Diode) <sup>(b)</sup>	$I_S$	4.5	A
Pulsed Source Current (Body Diode) <sup>(c)</sup>	$I_{SM}$	45	A
Power Dissipation at $T_A=25^\circ C$ <sup>(a)</sup>	$P_D$	2	mW
Linear Derating Factor		16	mW/ $^\circ C$
Power Dissipation at $T_A=25^\circ C$ <sup>(b)</sup>	$P_D$	3	mW
Linear Derating Factor		24	mW/ $^\circ C$
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ C$

## THERMAL RESISTANCE


PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient <sup>(a)</sup>	$R_{\theta JA}$	62.5	$^\circ C/W$
Junction to Ambient <sup>(b)</sup>	$R_{\theta JA}$	41.4	$^\circ C/W$

### NOTES

- (a) For a device surface mounted on 50mm x 50mm FR4 PCB with high coverage of single sided 2oz copper, in still air conditions.  
(b) For a device surface mounted on FR4 PCB measured at  $t \leq 10$  sec.  
(c) Repetitive rating - 25mm x 25mm FR4 PCB,  $D=0.02$ , pulse width 300 $\mu s$  - pulse width limited by maximum junction temperature.

# ZXMN3B04N8

## CHARACTERISTICS

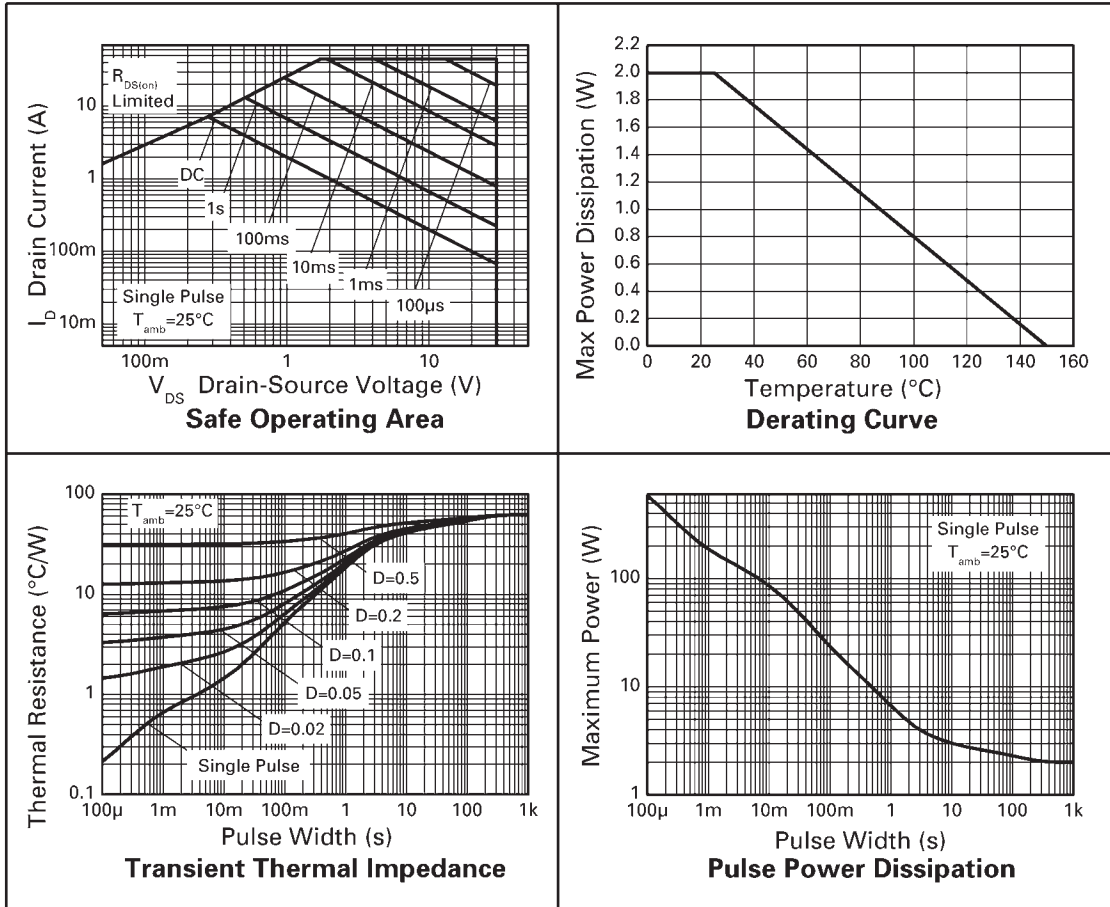

# ZXMN3B04N8

## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated)


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
<b>STATIC</b>						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	30			V	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$
Zero Gate Voltage Drain Current	$I_{DSS}$			0.5	$\mu\text{A}$	$V_{DS}=30\text{V}, V_{GS}=0\text{V}$
Gate-Body Leakage	$I_{GSS}$			100	nA	$V_{GS}=\pm 12\text{V}, V_{DS}=0\text{V}$
Gate-Source Threshold Voltage	$V_{GS(th)}$	0.7			V	$I_D=250\mu\text{A}, V_{DS}=V_{GS}$
Static Drain-Source On-State Resistance <sup>(1)</sup>	$R_{DS(on)}$		0.021	0.025	$\Omega$	$V_{GS}=4.5\text{V}, I_D=7.2\text{A}$
			0.028	0.040	$\Omega$	$V_{GS}=2.5\text{V}, I_D=5.7\text{A}$
Forward Transconductance <sup>(1) (3)</sup>	$g_{fs}$		24		S	$V_{DS}=15\text{V}, I_D=7.2\text{A}$
<b>DYNAMIC</b> <sup>(3)</sup>						
Input Capacitance	$C_{iss}$		2480		pF	$V_{DS}=15\text{V}, V_{GS}=0\text{V},$ $f=1\text{MHz}$
Output Capacitance	$C_{oss}$		318		pF	
Reverse Transfer Capacitance	$C_{rss}$		184		pF	
<b>SWITCHING</b> <sup>(2) (3)</sup>						
Turn-On Delay Time	$t_{d(on)}$		9		ns	$V_{DD}=15\text{V}, V_{GS}=4.5\text{V}$ $I_D=1\text{A}$ $R_G\approx 6.0\Omega,$
Rise Time	$t_r$		11.5		ns	
Turn-Off Delay Time	$t_{d(off)}$		40		ns	
Fall Time	$t_f$		16.6		ns	
Total Gate Charge	$Q_g$		23.1		nC	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V},$ $I_D=7.2\text{A}$
Gate-Source Charge	$Q_{gs}$		4.9		nC	
Gate-Drain Charge	$Q_{gd}$		6.2		nC	
<b>SOURCE-DRAIN DIODE</b>						
Diode Forward Voltage <sup>(1)</sup>	$V_{SD}$		0.85	0.95	V	$T_J=25^{\circ}\text{C}, I_S=8\text{A},$ $V_{GS}=0\text{V}$
Reverse Recovery Time <sup>(3)</sup>	$t_{rr}$		17.9		ns	$T_J=25^{\circ}\text{C}, I_F=3.2\text{A},$ $di/dt=100\text{A}/\mu\text{s}$
Reverse Recovery Charge <sup>(3)</sup>	$Q_{rr}$		10		nC	

### NOTES

- (1) Measured under pulsed conditions. Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- (2) Switching characteristics are independent of operating junction temperature.
- (3) For design aid only, not subject to production testing.


# ZXMN3B04N8

## TYPICAL CHARACTERISTICS

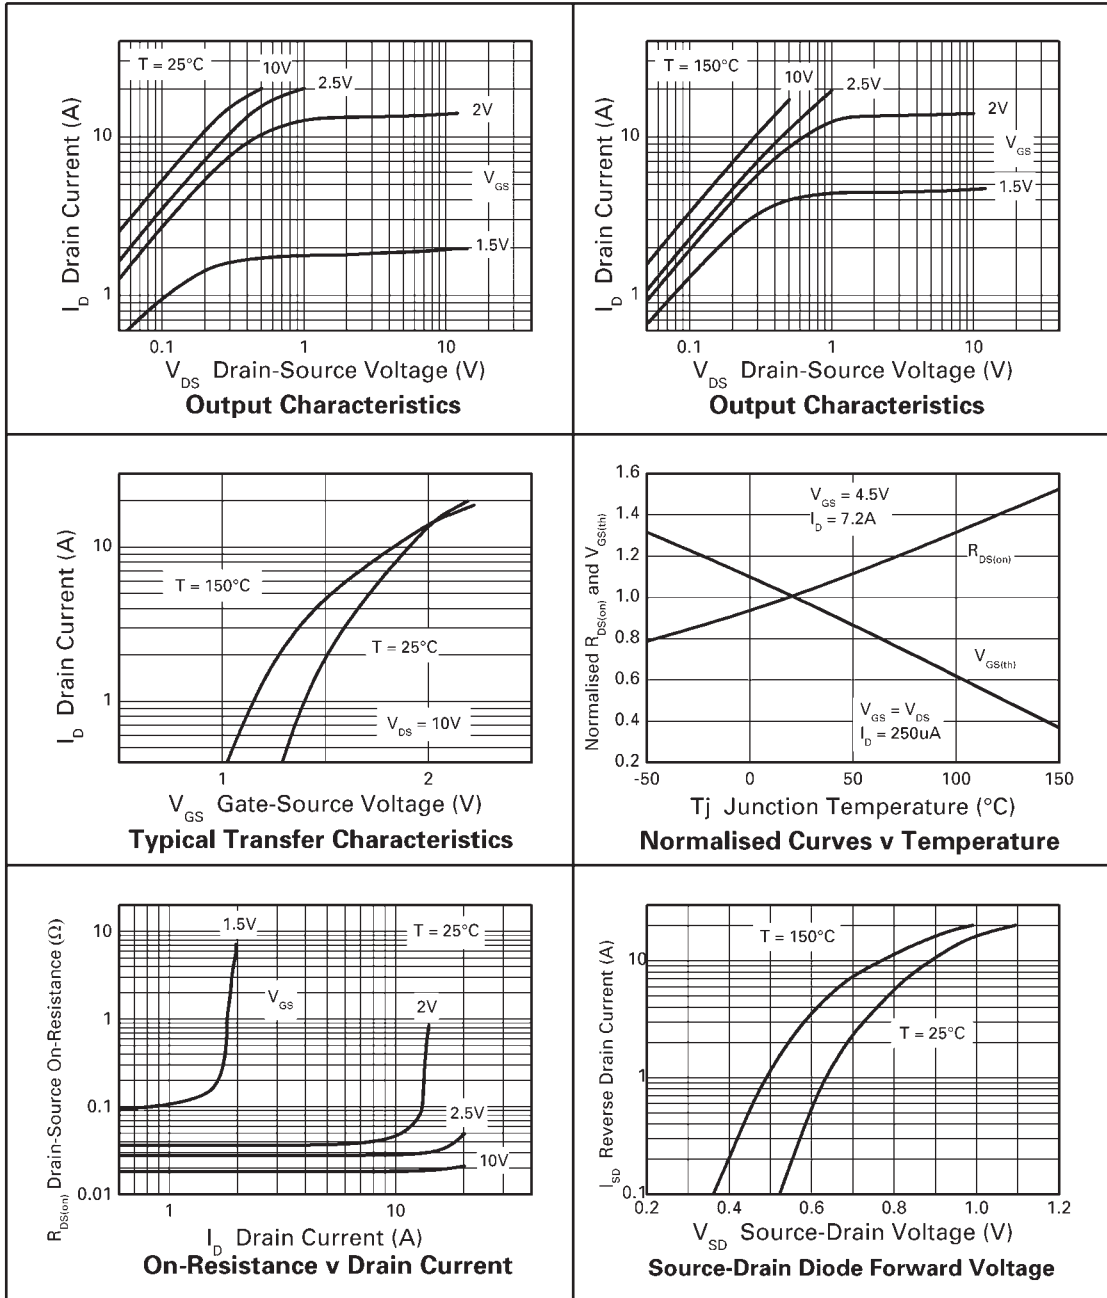


# ZXMN3B04N8

## TYPICAL CHARACTERISTICS

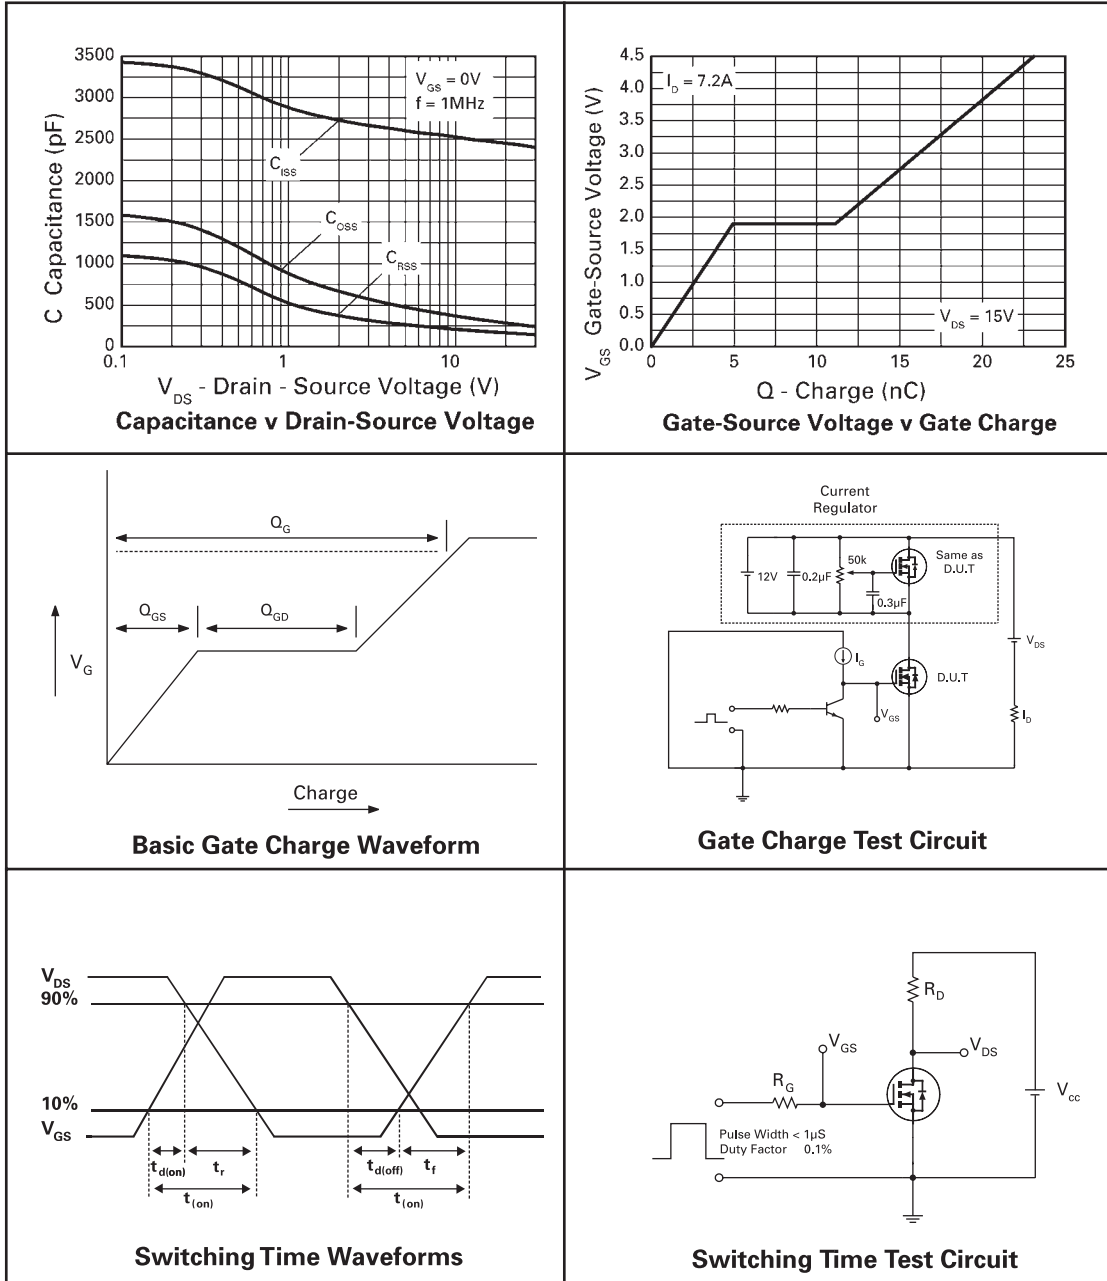

# ZXMN3B04N8

## PACKAGE OUTLINE

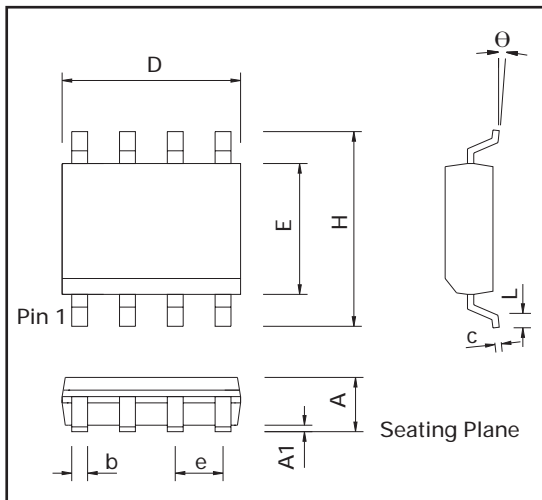

Controlling dimensions are in inches. Approximate conversions are given in millimetres

## PACKAGE DIMENSIONS

DIM	Inches		Millimetres		DIM	Inches		Millimetres	
	Min	Max	Min	Max		Min	Max	Min	Max
A	0.053	0.069	1.35	1.75	e	0.050 BSC		1.27 BSC	
A1	0.004	0.010	0.10	0.25	b	0.013	0.020	0.33	0.51
D	0.189	0.197	4.80	5.00	c	0.008	0.010	0.19	0.25
H	0.228	0.244	5.80	6.20	θ	0°	8°	0°	8°
E	0.150	0.157	3.80	4.00	h	0.010	0.020	0.25	0.50
L	0.016	0.050	0.40	1.27					

© Zetex plc 2003

Europe		Americas	Asia Pacific
Zetex plc Fields New Road Chadderton Oldham, OL9 8NP United Kingdom Telephone (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com	Zetex GmbH Streitfeldstraße 19 D-81673 München  Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY 11788  USA Telephone: (1) 631 360 2222 Fax: (1) 631 360 8222 usa.sales@zetex.com	Zetex (Asia) Ltd 3701-04 Metroplaza Tower 1 Hing Fong Road Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to [www.zetex.com](http://www.zetex.com)

ISSUE 1 - JULY 2003