

**2SC4871**

UHF to S Band Low-Noise Amplifier, OSC Applications


Features

- High cutoff frequency : $f_T=10\text{GHz}$ typ.
- High gain : $|S_{21e}|^2=13\text{dB}$ typ ($f=1\text{GHz}$).
- Low noise : $\text{NF}=1.3\text{dB}$ typ ($f=1\text{GHz}$).
- Small Cob : $\text{Cob}=0.4\text{pF}$ typ.

Package Dimensions

unit:mm

2059B

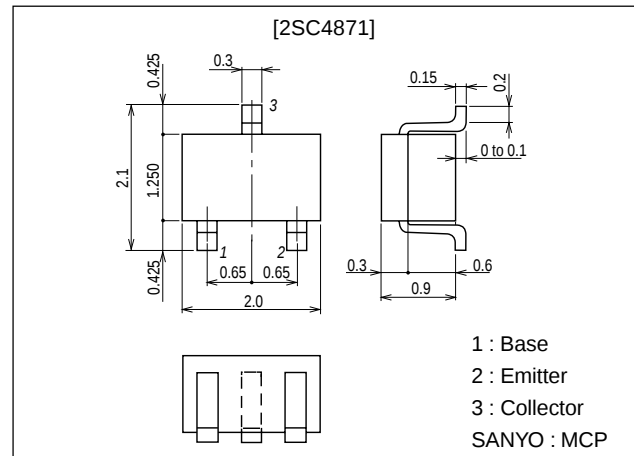

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		16	V
Collector-to-Emitter Voltage	V_{CEO}		8	V
Emitter-to-Base Voltage	V_{EBO}		1.5	V
Collector Current	I_{C}		20	mA
Collector Dissipation	P_{C}		100	mW
Junction Temperature	T_{J}		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{\text{CB}}=10\text{V}, I_{\text{E}}=0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{\text{EB}}=1\text{V}, I_{\text{C}}=0$			10	μA
DC Current Gain	h_{FE}	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=4\text{mA}$	60*		270*	
Gain-Bandwidth Product	f_{T}	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=4\text{mA}$		10		GHz
Output Capacitance	Cob	$V_{\text{CB}}=10\text{V}, f=1\text{MHz}$		0.4	0.7	pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=7\text{mA}, f=1\text{GHz}$	10	13		dB
Noise Figure	NF	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=4\text{mA}, f=1\text{GHz}$		1.3	2.8	dB

* : The 2SC4871 is classified by 4mA h_{FE} as follows :

Marking : HN

 h_{FE} rank : 3, 4, 5

60	3	120	90	4	180	135	5	270
----	---	-----	----	---	-----	-----	---	-----








■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

12599HA (KT)/41095TS (KOTO) TA-0078 No.4857-1/4

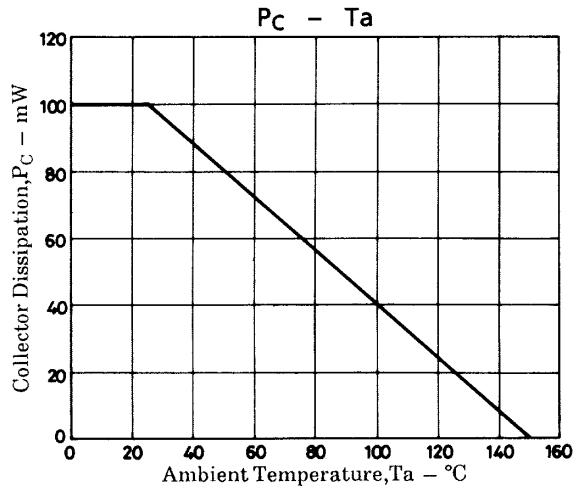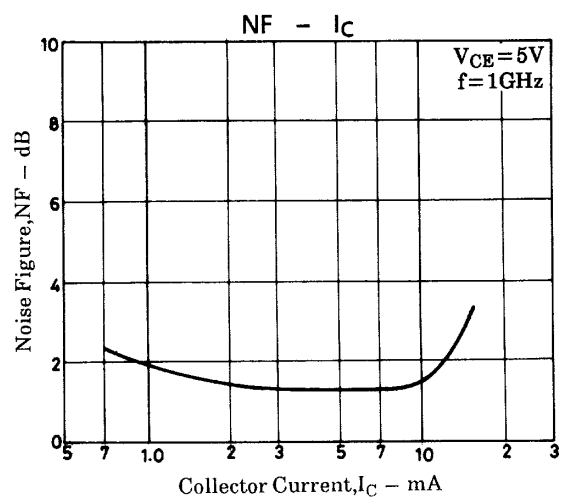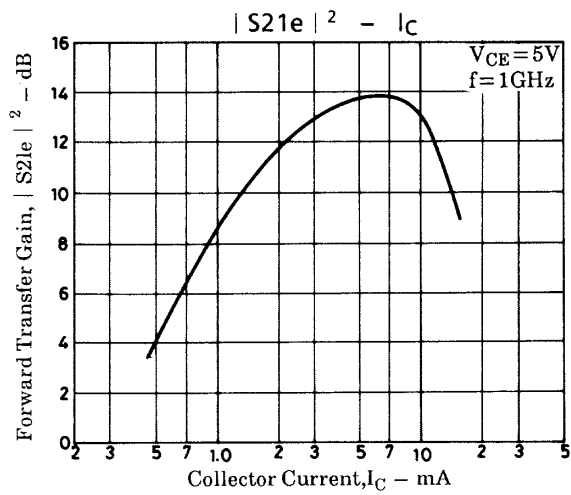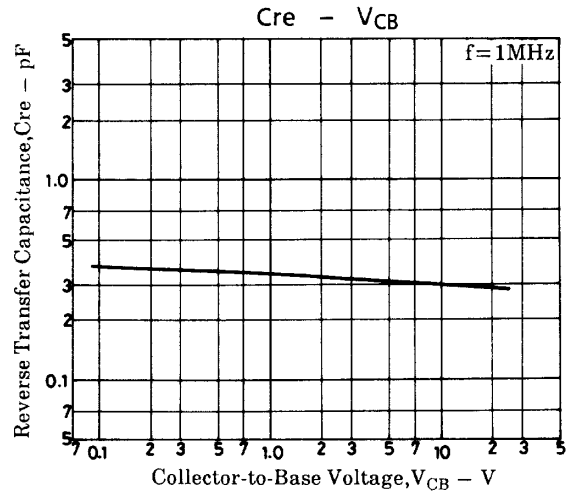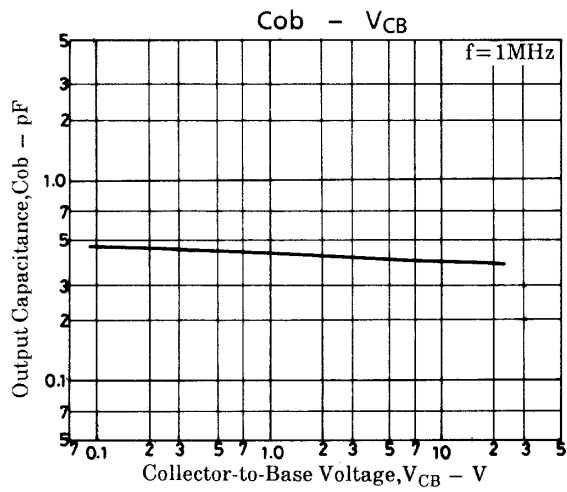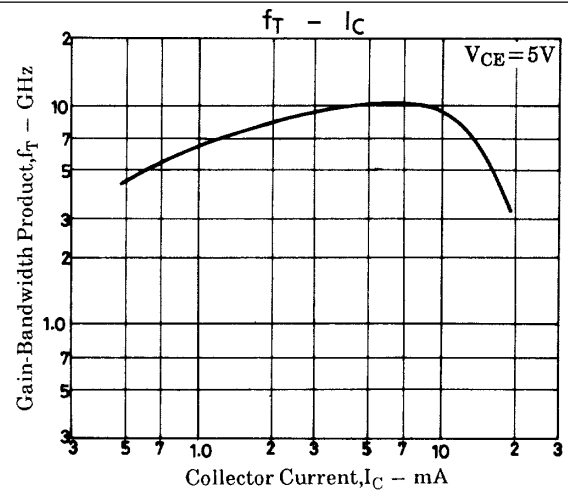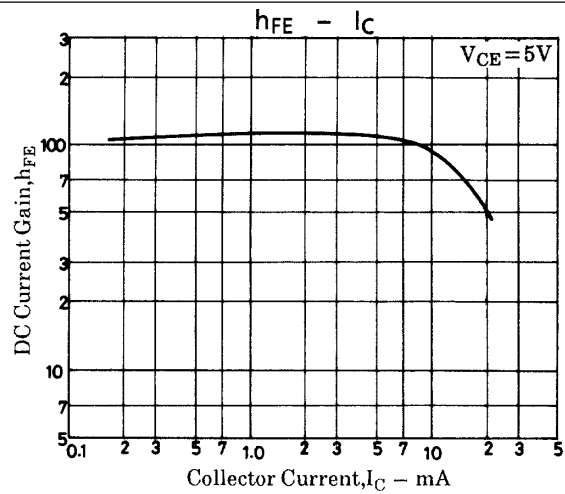


S parameter

f = 200 to 2000MHz (200MHz Step)

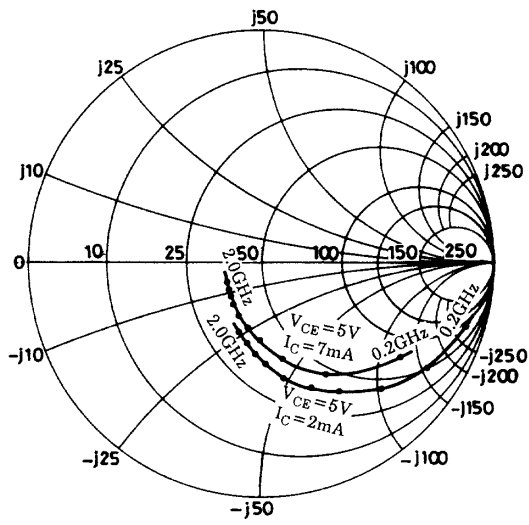


f = 200 to 2000MHz (200MHz Step)

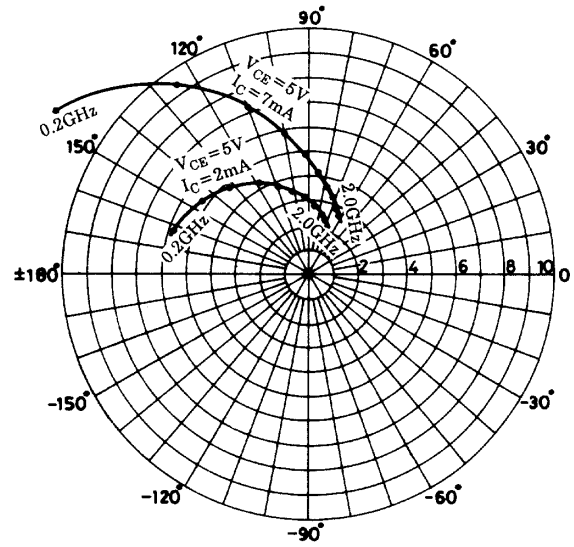


$V_{CE} = 5V$

f = 200 to 2000MHz (200MHz Step)

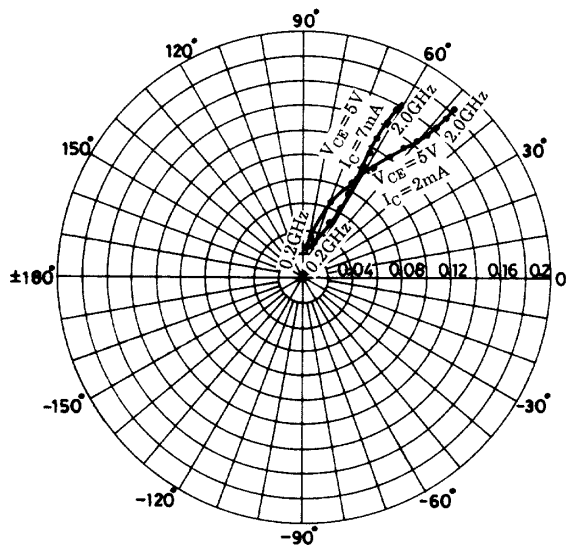

f = 200 to 2000MHz (200MHz Step)

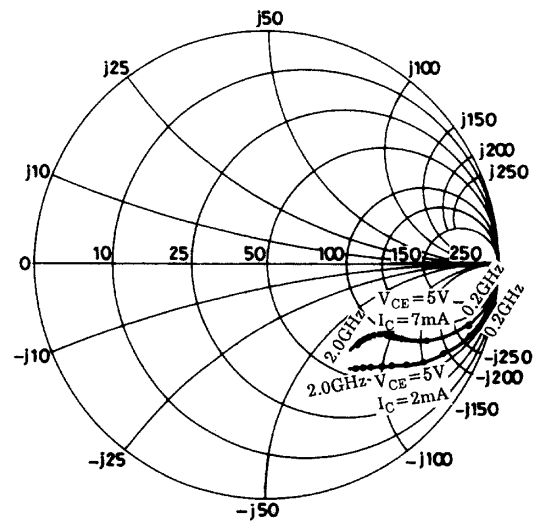

S parameter (Common emitter)

$V_{CE}=5V$, $I_C=2mA$, $Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.912	-17.6	5.764	161.5	0.034	79.0	0.974	-10.3
400	0.835	-33.0	5.282	145.5	0.065	69.9	0.919	-19.2
600	0.742	-46.9	4.753	131.2	0.088	62.8	0.850	-26.3
800	0.649	-58.9	4.268	119.4	0.107	57.9	0.789	-31.6
1000	0.578	-68.7	3.840	109.4	0.121	54.5	0.740	-35.5
1200	0.512	-78.1	3.440	100.5	0.134	52.2	0.698	-38.9
1400	0.445	-86.3	3.123	92.5	0.145	50.3	0.664	-41.6
1600	0.400	-93.0	2.836	85.2	0.154	49.2	0.638	-44.3
1800	0.359	-98.5	2.588	79.0	0.164	48.4	0.615	-46.3
2000	0.319	-106.6	2.397	73.0	0.174	47.9	0.601	-48.3

$V_{CE}=5V$, $I_C=7mA$, $Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.721	-35.1	12.262	147.1	0.030	72.8	0.900	-16.9
400	0.555	-59.9	9.445	124.9	0.050	64.4	0.763	-25.6
600	0.428	-77.5	7.290	110.2	0.065	61.9	0.666	-29.3
800	0.344	-89.9	5.877	100.1	0.078	61.5	0.611	-31.1
1000	0.291	-100.6	4.911	92.1	0.091	61.7	0.583	-32.5
1200	0.254	-110.9	4.223	85.1	0.104	61.5	0.563	-34.1
1400	0.221	-121.4	3.703	79.0	0.117	61.6	0.551	-35.7
1600	0.197	-128.9	3.294	73.6	0.129	61.6	0.540	-37.8
1800	0.178	-136.7	3.946	68.5	0.143	61.1	0.530	-39.7
2000	0.171	-148.6	2.692	63.8	0.157	60.7	0.529	-41.7

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of January, 1999. Specifications and information herein are subject to change without notice.