



FW103

Ultrahigh-Speed Switching Applications


Features

- Low ON resistance
- Ultrahigh-speed switching.
- Composite type with two 4V-drive P-channel MOSFETs facilitating high-density mounting.
- Matched pair capability.

Package Dimensions

unit: mm

2129-SOP8

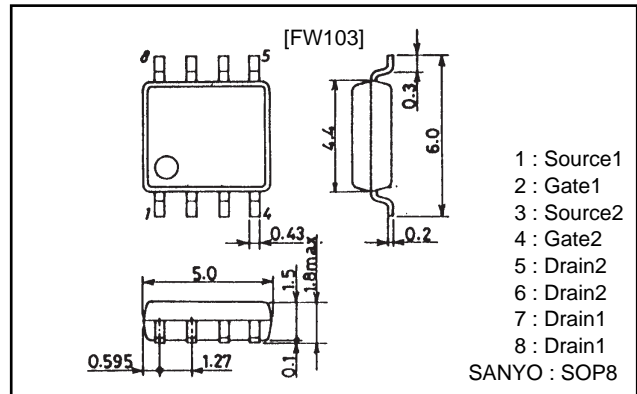

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V _{DSS}		-30	V
Gate-to-Source Voltage	V _{GSS}		±20	V
Drain Current (DC)	I _D		-3	A
Drain Current (pulse)	I _{DP}	PW≤10μs, duty cycle≤1%	-32	A
Allowable Power Dissipation	P _D	Mounted on a ceramic board (1000mm ² ×0.8mm) 1 unit	1.7	W
Total Dissipation	P _T	Mounted on a ceramic board (1000mm ² ×0.8mm)	2.0	W
Channel Temperature	T _{ch}		150	°C
Storage temperature	T _{stg}		-55 to +150	°C

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
D-S Breakdown Voltage	V _{(BR)DSS}	I _D =-1mA, V _{GS} =0	-30			V
Zero-Gate-Voltage Drain Current	I _{DSS}	V _{DS} =-30V, V _{GS} =0			-100	μA
Gate-to-Source Leakage Current	I _{GSS}	V _{GS} =±16V, V _{DS} =0			±10	μA
Cutoff Voltage	V _{GS(off)}	V _{DS} =-10V, I _D =-1mA	-1.0		-2.5	V
Forward Transfer Admittance	y _{fs}	V _{DS} =-10V, I _D =-3A	2	4		S
Static Drain-to-Source ON-State Resistance	R _{DS(on)}	I _D =-3A, V _{GS} =-10V		95	125	mΩ
ON-State Resistance	R _{DS(on)}	I _D =-3A, V _{GS} =-4V		150	205	mΩ
Input Capacitance	C _{iss}	V _{DS} =-10V, f=1MHz		550		pF
Output Capacitance	C _{oss}	V _{DS} =-10V, f=1MHz		370		pF
Reverse Transfer Capacitance	C _{rss}	V _{DS} =-10V, f=1MHz		70		pF


Continued on next page.

FW103

Continued from preceding page.





Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Turn-ON Delay Time	$t_{d(on)}$	See specified Test Circuit.		20		ns
Rise Time	t_r	"		110		ns
Turn-OFF Delay Time	$t_{d(off)}$	"		330		ns
Fall Time	t_f	"		170		ns
Diode Forward Voltage	V_{SD}	$I_S = -3A, V_{GS} = 0$	-1.0	-1.2		V

Switching Time Test Circuit



Electrical Connection

(Top view)

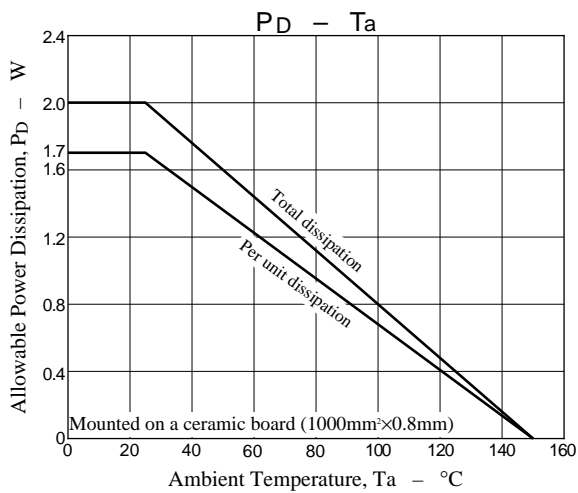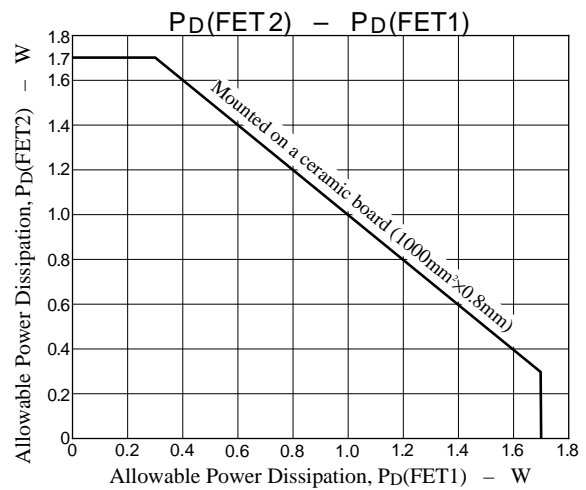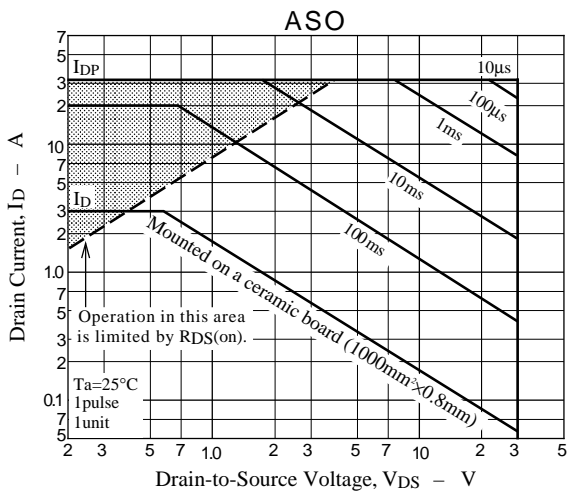

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1997. Specifications and information herein are subject to change without notice.