


DUAL LOW VOLTAGE POWER AMPLIFIER

The KA2209 is a monolithic integrated audio amplifier in a 8-pin plastic dual in line package. It is designed for portable cassette players and radios.

FEATURES

- Wide operating supply voltage: $V_{CC}=1.8V \sim 9V$
- Low crossover distortion
- Low quiescent circuit current
- Bridge/stereo configuration

8 DIP



ORDERING INFORMATION

Device	Package	Operating Temperature
KA2209	8 DIP	$-20^{\circ}C \sim +70^{\circ}C$

BLOCK DIAGRAM

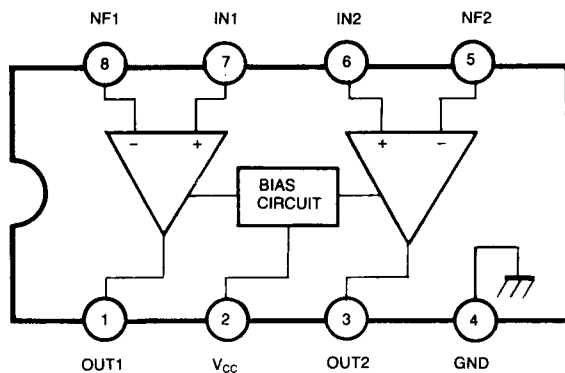


Fig. 1

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)


Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	15	V
Output Peak Current	I_{PK}	1	A
Power Dissipation	P_D	at $T_{AMB} = 50^\circ\text{C}$ 1.0 at $T_{CASE} = 50^\circ\text{C}$ 1.4	W
Operating Temperature	T_{OPR}	$-20 \sim +70$	$^\circ\text{C}$
Storage Temperature	T_{STG}	$-40 \sim +150$	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS(T_a = 25°C, V_{CC} = 6V, f = 1KHz, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Operating Voltage	V_{CC}		1.8		9	V
Quiescent Circuit Current	I_{CCQ}	$V_i = 0$		9		mA
Closed Loop Voltage Gain	G_{VC}	Stereo		40		dB
		Bridge		40		dB
Channel Balance	CB	Stereo	-1	0	1	dB
Output Power	P_O	Stereo	$V_{CC} = 6V, R_L = 4\Omega, THD = 10\%$	0.4	0.65	W
			$V_{CC} = 3V, R_L = 4\Omega, THD = 10\%$		0.11	W
		Bridge	$V_{CC} = 6V, R_L = 8\Omega, THD = 10\%$	0.9	1.35	W
			$V_{CC} = 3V, R_L = 4\Omega, THD = 10\%$		0.35	W
Total Harmonic Distortion	THD	Stereo, $R_L = 8\Omega, P_O = 0.2W$		0.5		%
		Bridge, $R_L = 8\Omega, P_O = 0.5W$		0.5		%
Ripple Rejection Ratio	RR	Stereo, $f = 100\text{Hz}, C_3 = 100\mu\text{F}$	24	30		dB
Output Noise Voltage	V_{NO}	Stereo, $BW(-3dB) = 20\text{Hz} \sim 20\text{KHz}$		0.5	2.0	mV
Cross Talk	CT	Stereo, $f = 1\text{KHz}$		50		dB
Input Resistance	R_i		100			K Ω

APPLICATION CIRCUIT

1. STEREO

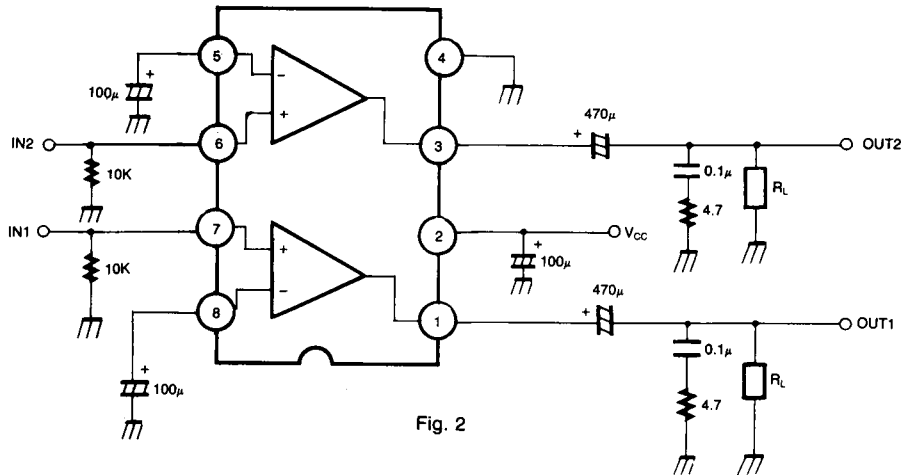

2. BRIDGE

