

KSB1151


PNP EPITAXIAL SILICON TRANSISTOR

LOW COLLECTOR SATURATION VOLTAGE
LARGE CURRENTHIGH POWER DISSIPATION: $P_T=1.3W$ ($T_a=25^\circ C$)
Complementary to KSD1691ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-60	V
Collector-Emitter Voltage	V_{CEO}	-60	V
Emitter-Base Voltage	V_{EB0}	-7	V
Collector Current (DC)	I_C	-5	A
*Collector Current (Pulse)	I_C	-8	A
Base Current (DC)	I_B	-1	A
Collector Dissipation ($T_a=25^\circ C$)	P_C	1.3	W
Collector Dissipation ($T_C=25^\circ C$)	P_C	20	W
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	-55~150	$^\circ C$

* $PW \leq 10ms$, Duty Cycle $\leq 50\%$

TO-18



1. Emitter 2. Collector 3. Base

3

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -50V, I_E = 0$			-10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -7V, I_C = 0$			-10	μA
*DC Current Gain	h_{FE1}	$V_{CE} = -1V, I_C = -0.1A$	60			
	h_{FE2}	$V_{CE} = -1V, I_C = -2A$	100	200	400	
	h_{FE3}	$V_{CE} = -2V, I_C = -5A$	50			
*Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -2A, I_B = -0.2A$		-0.14	-0.3	V
*Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -2A, I_B = -0.2A$		-0.9	-1.2	V
Turn On Time	t_{on}	$I_C = -2A, I_{B1} = -I_{B2} = 0.2A$		0.15	1	μS
Storage Time	t_{stg}	$RL = 5\Omega, V_{CC} = -10V$		0.78	2.5	μS
Fall Time	t_f			0.18	1	μS

* Pulse test: $PW \leq 350\mu s$, Duty Cycle $\leq 2\%$ Pulsed $h_{FE}(2)$ CLASSIFICATION

Classification	O	Y	G
h_{FE2}	100-200	160-320	200-400




KSB1151


PNP EPITAXIAL SILICON TRANSISTOR

1-33-19


POWER DERATING

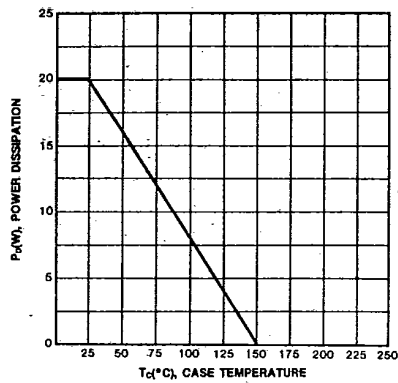


DERATING CURVE OF SAFE OPERATING AREAS

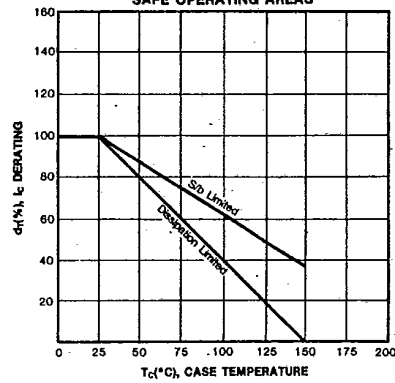


FORWARD BIAS OPERATING AREA

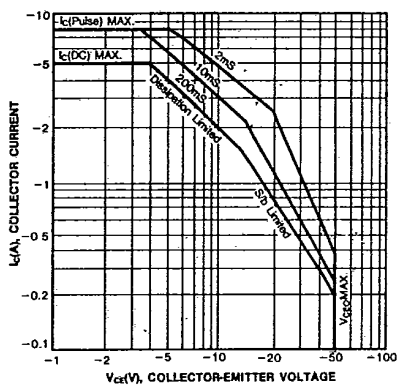


REVERSE BIAS SAFE OPERATING AREA

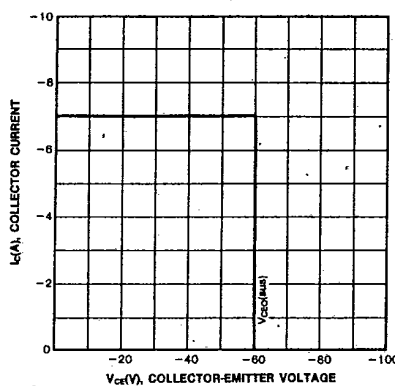

STATIC CHARACTERISTIC

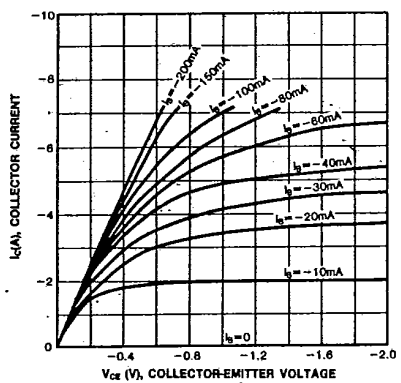


DC CURRENT GAIN

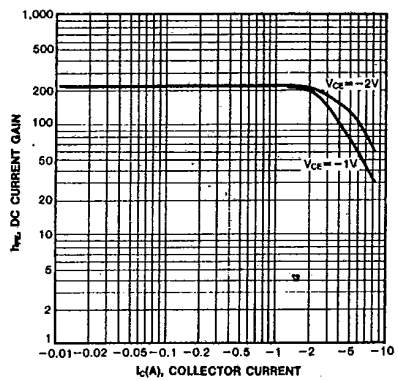

KSB1151

PNP EPITAXIAL SILICON TRANSISTOR

T-33-19

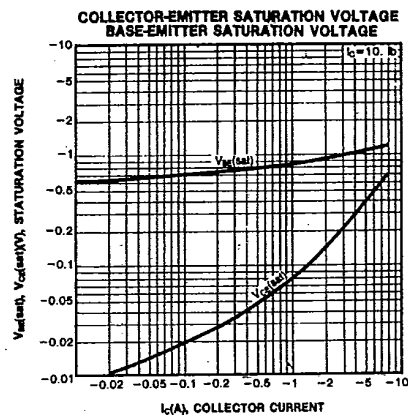

3



KSC1096**NPN EPITAXIAL SILICON TRANSISTOR**

T-33-07


LOW FREQUENCY POWER AMPLIFIER

- Complement to KSA634
- Collector Current $I_C = 2.0A$
- Collector Dissipation $P_C = 10W$ ($T_a = 25^\circ C$)

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	40	V
Collector-Emitter Voltage	V_{CE0}	30	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current	I_C	2.0	A
Collector Dissipation ($T_C = 25^\circ C$)	P_C	10	W
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	$-55 \sim +150$	$^\circ C$

TO-202



1. Base 2. Collector 3. Emitter

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C = 500\mu A, I_E = 0$	40			V
Collector-Emitter Breakdown Voltage	BV_{CE0}	$I_C = 10mA, I_B = 0$	30			V
Emitter-Base Breakdown Voltage	BV_{EB0}	$I_E = -500\mu A, I_C = 0$	5			V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 30V, I_E = 0$			1	μA
DC Current Gain	h_{FE}	$V_{CE} = 5V, I_C = 1.0A$	40		240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 2A, I_B = 0.2A$			1.0	V

 h_{FE} CLASSIFICATION

Classification	R	O	Y
h_{FE}	40-80	70-140	120-240




KSC1096



NPN EPITAXIAL SILICON TRANSISTOR

T-33-07


STATIC CHARACTERISTIC

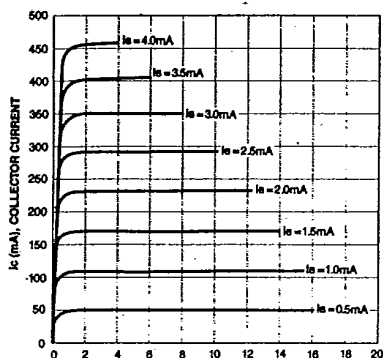


DC CURRENT GAIN

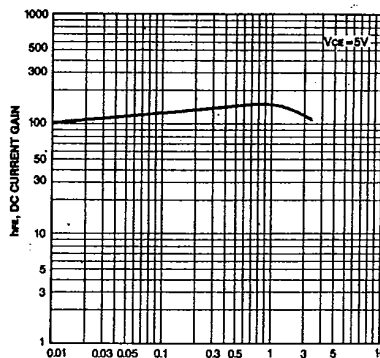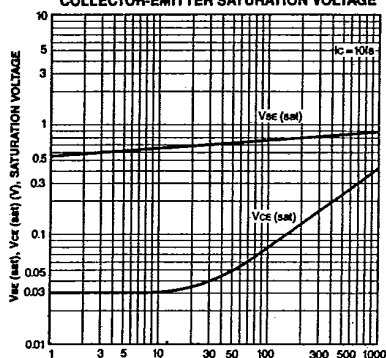BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE


COLLECTOR OUTPUT CAPACITANCE

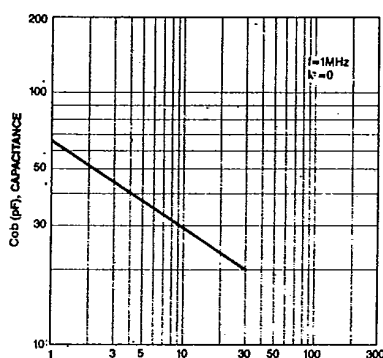

SAFE OPERATING AREA

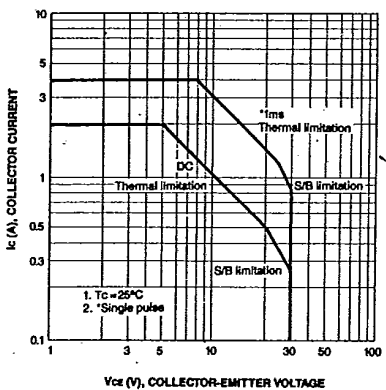

POWER DERATING

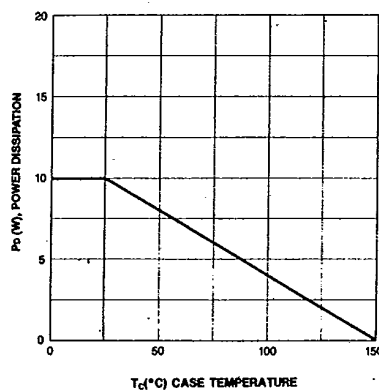

3

