


### Features

- Ideally Suited for Automatic Insertion
- Epitaxial Planar Die Construction
- For Switching, AF Driver and Amplifier Applications
- Complementary NPN Types Available (BC817)

### Mechanical Data

- Case: SOT-23, Molded Plastic
- Case material - UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Pin Connections: See Diagram
- Marking (See Page 3): BC807-16 5A, K5A  
BC807-25 5B, K5B  
BC807-40 5C, K5C
- Ordering & Date Code Information: See Page 3
- Approx. Weight: 0.008 grams

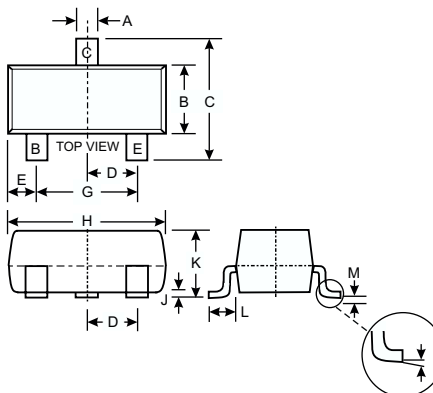

| SOT-23               |       |      |
|----------------------|-------|------|
| Dim                  | Min   | Max  |
| A                    | 0.37  | 0.51 |
| B                    | 1.20  | 1.40 |
| C                    | 2.30  | 2.50 |
| D                    | 0.89  | 1.03 |
| E                    | 0.45  | 0.60 |
| G                    | 1.78  | 2.05 |
| H                    | 2.80  | 3.00 |
| J                    | 0.013 | 0.10 |
| K                    | 0.903 | 1.10 |
| L                    | 0.45  | 0.61 |
| M                    | 0.85  | 0.80 |
| $\alpha$             | 0°    | 8°   |
| All Dimensions in mm |       |      |







### Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                                              | Symbol           | Value       | Unit               |
|-------------------------------------------------------------|------------------|-------------|--------------------|
| Collector-Emitter Voltage                                   | $V_{CEO}$        | -45         | V                  |
| Emitter-Base Voltage                                        | $V_{EBO}$        | -5.0        | V                  |
| Collector Current                                           | $I_C$            | -500        | mA                 |
| Peak Collector Current                                      | $I_{CM}$         | -1000       | mA                 |
| Peak Emitter Current                                        | $I_{EM}$         | -1000       | mA                 |
| Power Dissipation at $T_{SB} = 50^\circ\text{C}$ (Note 1)   | $P_d$            | 310         | mW                 |
| Thermal Resistance, Junction to Substrate Backside (Note 1) | $R_{\theta JSB}$ | 320         | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction to Ambient Air (Note 1)        | $R_{\theta JA}$  | 403         | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range                     | $T_j, T_{STG}$   | -65 to +150 | $^\circ\text{C}$   |

### Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic (Note 2)              | Symbol        | Min | Typ | Max          | Unit                | Test Condition                                                          |
|--------------------------------------|---------------|-----|-----|--------------|---------------------|-------------------------------------------------------------------------|
| DC Current Gain                      | $h_{FE}$      | 100 | —   | 250          | —                   | $V_{CE} = 1.0\text{V}, I_C = 100\text{mA}$                              |
| Current Gain Group -16               |               | 160 |     | 400          |                     |                                                                         |
| -25                                  |               | 250 |     | 600          |                     |                                                                         |
| -40                                  |               | 60  |     | —            |                     |                                                                         |
| Current Gain Group -16               | $h_{FE}$      | 60  | —   | —            | —                   | $V_{CE} = 1.0\text{V}, I_C = 300\text{mA}$                              |
| -25                                  |               | 100 |     | —            |                     |                                                                         |
| -40                                  |               | 170 |     | —            |                     |                                                                         |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | —   | —   | -0.7         | V                   | $I_C = 500\text{mA}, I_B = 50\text{mA}$                                 |
| Base-Emitter Voltage                 | $V_{BE}$      | —   | —   | -1.2         | V                   | $V_{CE} = 1.0\text{V}, I_C = 300\text{mA}$                              |
| Collector-Emitter Cutoff Current     | $I_{CES}$     | —   | —   | -100<br>-5.0 | nA<br>$\mu\text{A}$ | $V_{CE} = 45\text{V}$<br>$V_{CE} = 25\text{V}, T_j = 150^\circ\text{C}$ |
| Emitter-Base Cutoff Current          | $I_{EBO}$     | —   | —   | -100         | nA                  | $V_{EB} = 4.0\text{V}$                                                  |
| Gain Bandwidth Product               | $f_T$         | 100 | —   | —            | MHz                 | $V_{CE} = 5.0\text{V}, I_C = 10\text{mA}, f = 50\text{MHz}$             |
| Collector-Base Capacitance           | $C_{CBO}$     | —   | —   | 12           | pF                  | $V_{CB} = 10\text{V}, f = 1.0\text{MHz}$                                |

Notes: 1. Device mounted on ceramic substrate 0.7mm; 2.5cm<sup>2</sup> area.  
2. Short duration pulse test used to minimize self-heating effect.

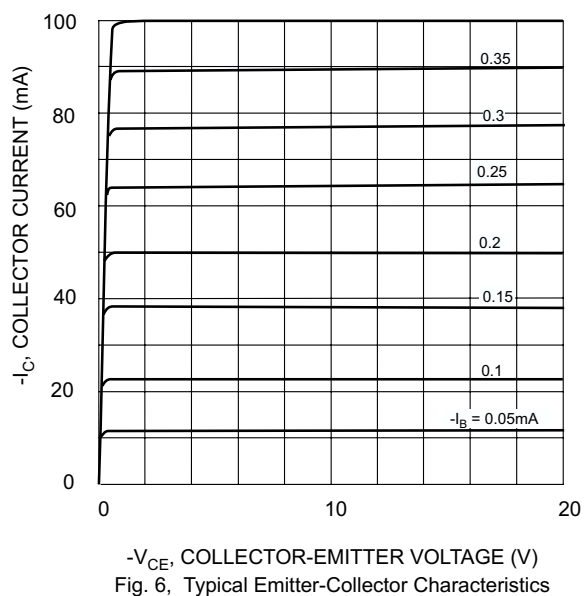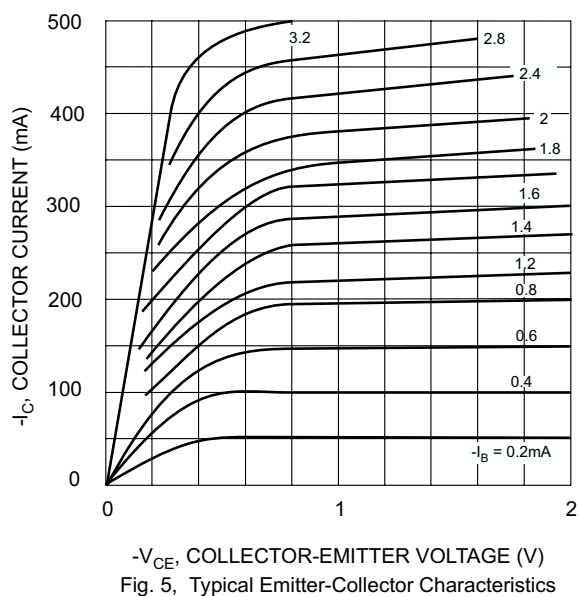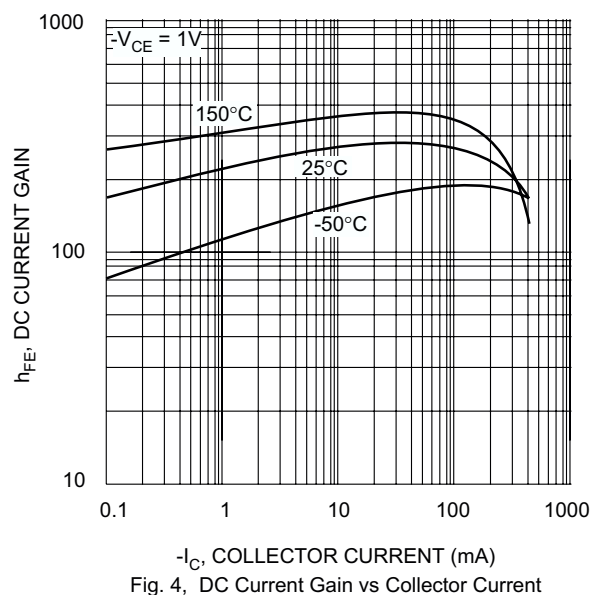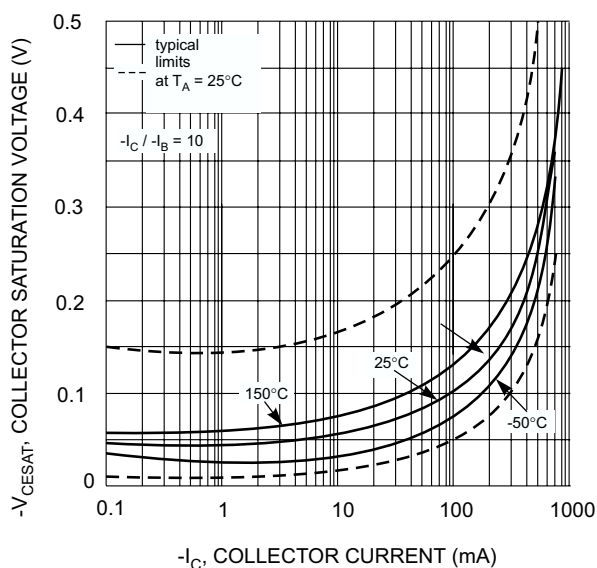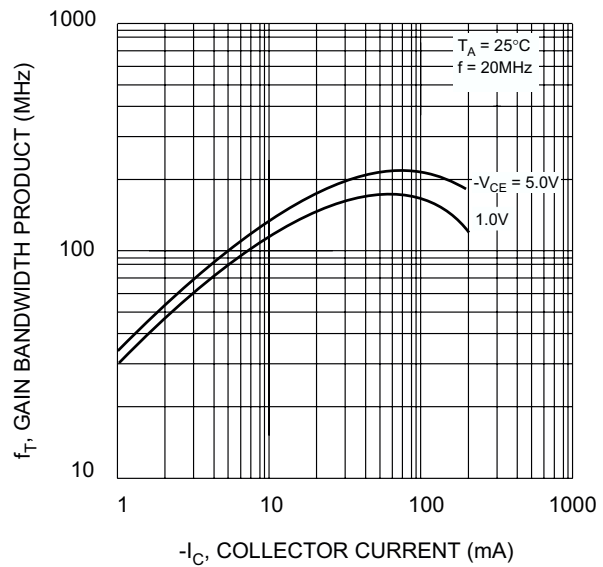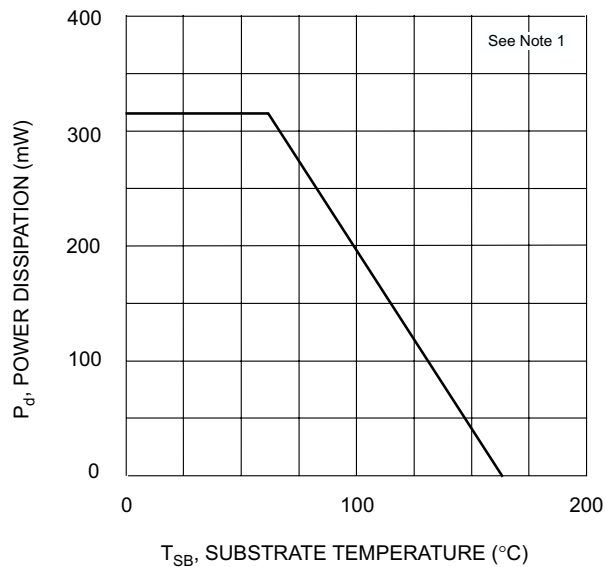


## Ordering Information

| Device*    | Packaging | Shipping         |
|------------|-----------|------------------|
| BC807-xx-7 | SOT-23    | 3000/Tape & Reel |

Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.  
\*xx = gain group, eg. BC807-16-7.

## Marking Information



XXX = Product Type Marking Code (See Page 1): e.g. K5A = BC807-16  
YM = Date Code Marking  
Y = Year ex: N = 2002  
M = Month ex: 9 = September

### Date Code Key

| Year | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 |
|------|------|------|------|------|------|------|------|
| Code | J    | K    | L    | M    | N    | P    | R    |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3     | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |