


Features

- Low Forward Voltage Drop
- Fast Switching Speeds
- Guard Ring Construction for Transient Protection

Mechanical Data

- Case: MiniMELF, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Marking: Cathode Band Only
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)

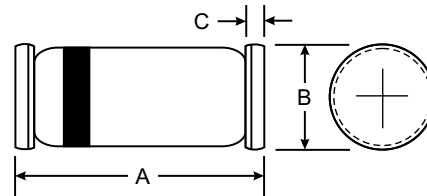

MiniMELF		
Dim	Min	Max
A	3.30	3.70
B	1.30	1.60
C	0.28	0.50
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	LL42	LL43	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30		V
RMS Reverse Voltage	$V_{R(RMS)}$	21		V
Average Rectified Output Current	I_O	100		mA
Forward Continuous Current (Note 1)	I_{FM}	200		mA
Repetitive Peak Forward Current (Note 1) @ $t < 1.0\text{s}$ Duty Cycle $< 50\%$	I_{FRM}	500		mA
Non-Repetitive Peak Forward Surge Current @ $t = 10\text{ms}$	I_{FSM}	4.0		A
Power Dissipation (Note 1)	P_d	200		mW
Thermal Resistance, Junction to Ambient Air (Note 1)	$R_{\theta JA}$	500		K/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +125		$^\circ\text{C}$

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage	$V_{(BR)R}$	30	—	—	V	$I_{RS} = 100\mu\text{A}$ Pulses
Maximum Forward Voltage Drop (Note 2)	V_{FM}	— — 0.26 —	—	1.00 0.40 0.65 0.33 0.45	V	$I_F = 200\text{mA}$ $I_F = 10\text{mA}$ $I_F = 50\text{mA}$ $I_F = 2.0\text{mA}$ $I_F = 15\text{mA}$
Maximum Peak Reverse Current (Note 2)	I_{RM}	—	—	0.50 100	μA	$V_R = 25\text{V}$ $V_R = 25\text{V}, T_J = 100^\circ\text{C}$
Junction Capacitance	C_j	—	10	—	pF	$V_R = 1.0\text{V}, f = 1.0\text{MHz}$
Reverse Recovery Time	t_{rr}	—	—	5.0	ns	$I_F = I_R = 10\text{mA}$, $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$
Rectification Efficiency	η_V	80	—	—	%	$R_L = 100\Omega, C_L = 300\text{pF}$, $f = 45\text{MHz}, V_{RF} = 2.0\text{V}$

- Notes:
1. Valid provided that electrodes are kept at ambient temperature.
 2. $t < 300\mu\text{s}$, Duty Cycle $< 2\%$.