

# MA360J

## Silicon epitaxial planer type

For UHF and VHF electronic tuners

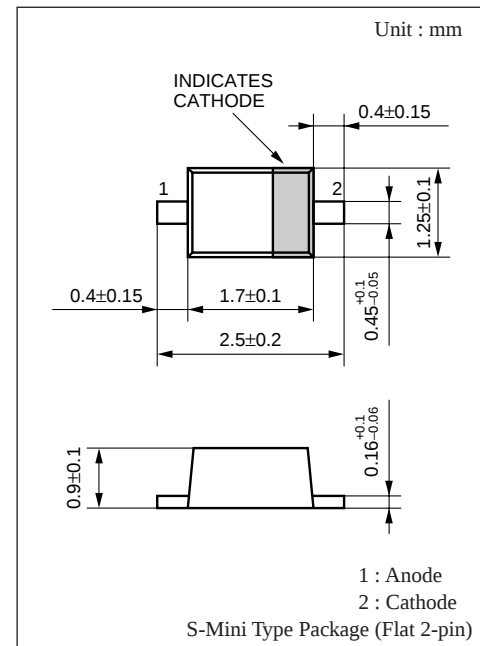
### ■ Features

- Large capacity variation ratio
- Small series resistance  $r_D$

### ■ Absolute Maximum Ratings (Ta= 25°C)

| Parameter            | Symbol     | Rating       | Unit |
|----------------------|------------|--------------|------|
| Reverse voltage (DC) | $V_R$      | 30           | V    |
| Peak reverse voltage | $V_{RM}^*$ | 35           | V    |
| Forward current (DC) | $I_F$      | 20           | mA   |
| Junction temperature | $T_j$      | 150          | °C   |
| Storage temperature  | $T_{stg}$  | - 55 to +150 | °C   |

\*  $R_L \approx 10k\Omega$



Marking Symbol : 6A


### ■ Electrical Characteristics (Ta= 25°C)




| Parameter                   | Symbol                 | Condition                    | min    | typ | max    | Unit     |
|-----------------------------|------------------------|------------------------------|--------|-----|--------|----------|
| Reverse current (DC)        | $I_R$                  | $V_R = 28V$                  |        |     | 10     | nA       |
| Diode capacitance           | $C_{D(2V)}$            | $V_R = 2V, f = 1MHz$         | 14.360 |     | 16.340 | pF       |
|                             | $C_{D(25V)}$           | $V_R = 25V, f = 1MHz$        | 2.089  |     | 2.448  | pF       |
|                             | $C_{D(10V)}$           | $V_R = 10V, f = 1MHz$        | 5.433  |     | 6.369  | pF       |
|                             | $C_{D(17V)}$           | $V_R = 17V, f = 1MHz$        | 2.945  |     | 3.452  | pF       |
| Capacitance ratio           | $C_{D(2V)}/C_{D(25V)}$ |                              | 5.95   |     | 7.26   | —        |
| Diode capacitance deviation | $\Delta C$             | $C_D (2V) (10V) (17V) (25V)$ |        |     | 2      | %        |
| Series resistance           | $r_D^{*1}$             | $C_D = 9pF, f = 470MHz$      |        |     | 0.6    | $\Omega$ |

Note 1. Rated input/output frequency : 470MHz

2. \*1 :  $r_D$  measurement device : YHP MODEL 4191A RF IMPEDANCE ANALYZER
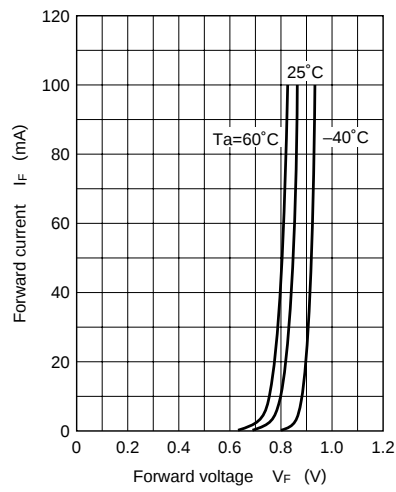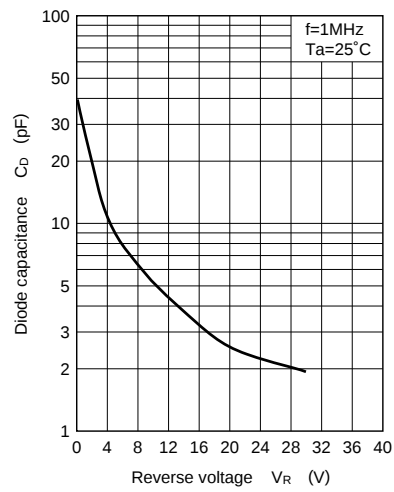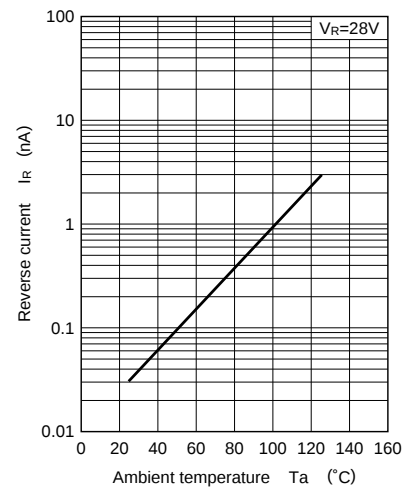
### ■ Marking



$I_F - V_F$  $C_D - V_R$  $I_R - T_a$  $C_D - T_a$ 