Certificate Number: Q10561

Certificate Number: E17276

SR26 - SR29

FAST RECOVERY SILICON SURFACE MOUNT

PRV : 100 - 800 Volts
Io : 2.0 Amperes

SMC (DO-214AB)

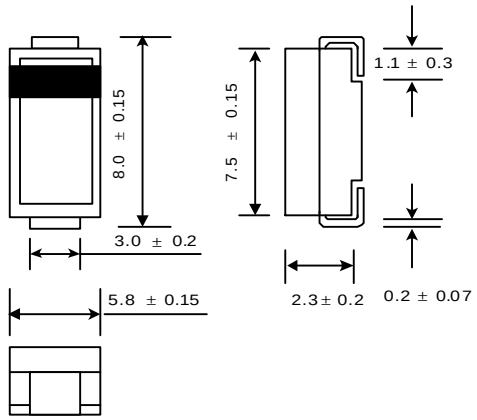

Dimensions in millimeter

FEATURES :

* High current capability
* High surge current capability
* High reliability
* Low reverse current
* Low forward voltage drop
* Fast switching for high efficiency

MECHANICAL DATA :

* Case : SMC Molded plastic
* Epoxy : UL94V-O rate flame retardant
* Lead : Lead Formed for Surface Mount
* Polarity : Color band denotes cathode end
* Mounting position : Any
* Weight : 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

RATING	SYMBOL	SR26	SR27	SR28	SR29	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	400	800	V
Maximum RMS Voltage	V_{RMS}	70	140	280	560	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	800	V
Maximum Average Forward Current Ta = 50 °C	$I_{F(AV)}$	2.0				A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I_{FSM}	70				A
Maximum Peak Forward Voltage at I_F = 2.0 A	V_F	1.3				V
Maximum DC Reverse Current Ta = 25 °C	I_R	10				µA
at Rated DC Blocking Voltage Ta = 100 °C	$I_{R(H)}$	500				µA
Maximum Reverse Recovery Time (Note 1)	Trr	250				ns
Typical Junction Capacitance (Note 2)	C_J	28				pf
Junction Temperature Range	T_J	- 50 to + 125				°C
Storage Temperature Range	T_{STG}	- 50 to + 150				°C

Notes :

(1) Reverse Recovery Test Conditions : I_F = 0.5 A, I_R = 1.0 A, Irr = 0.25 A.

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 V_{DC}

RATING AND CHARACTERISTIC CURVES (SR26 - SR29)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

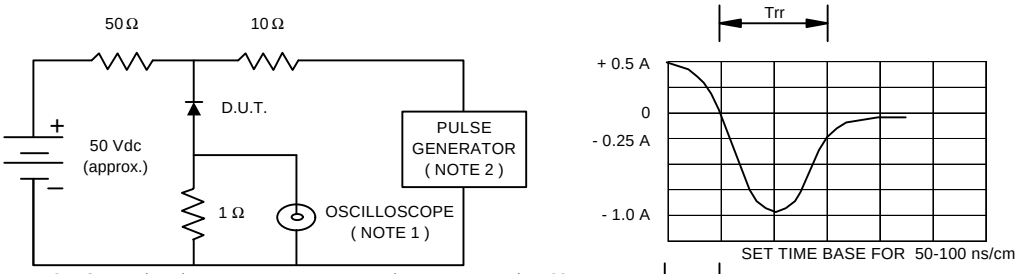

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.
2. Rise time = 10 ns max., Source Impedance = 50 ohms.
3. All Resistors = Non-inductive Types.

FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

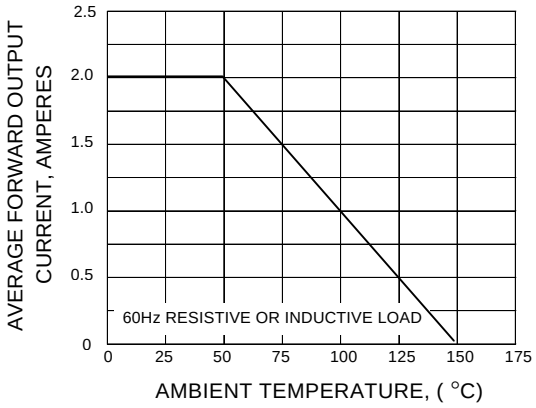

FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

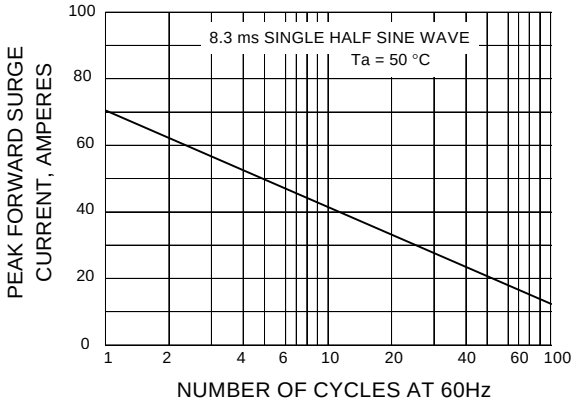

FIG.4 - TYPICAL FORWARD CHARACTERISTICS

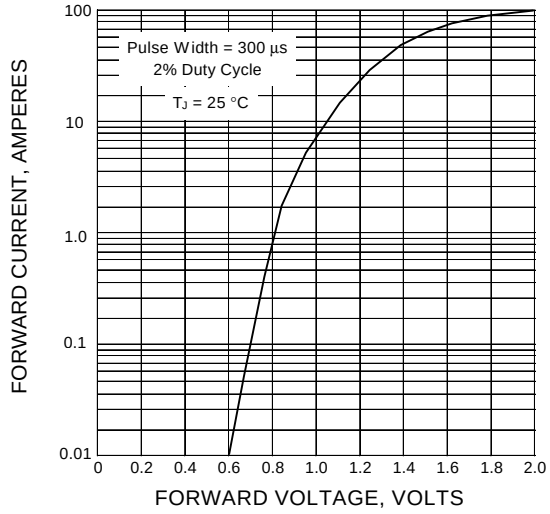
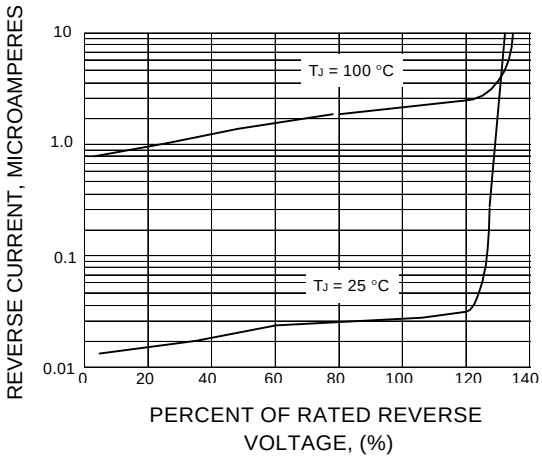
FIG.5 - TYPICAL REVERSE CHARACTERISTICS