

2SC3210

Silicon NPN Triple-Diffused Junction Mesa Type

High Breakdown Voltage, High Speed Switching


■ Features

- High speed switching
- High collector-base voltage (V_{CBO})
- Low collector-emitter saturation voltage ($V_{CE(sat)}$)
- "Full Pack" package for simplified mounting on a heat sink with one screw

■ Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Item		Symbol	Value	Unit
Collector-base voltage		V_{CBO}	500	V
Collector-emitter voltage		V_{CEO}	400	V
Emitter-base voltage		V_{EBO}	7	V
Peak collector current		I_{CP}	20	A
Collector current		I_C	10	A
Base current		I_B	5	A
Collector power dissipation	$T_C=25^{\circ}\text{C}$	P_C	100	W
	$T_a=25^{\circ}\text{C}$		3	
Junction temperature		T_j	150	$^{\circ}\text{C}$
Storage temperature		T_{stg}	$-55\sim +150$	$^{\circ}\text{C}$

■ Package Dimensions

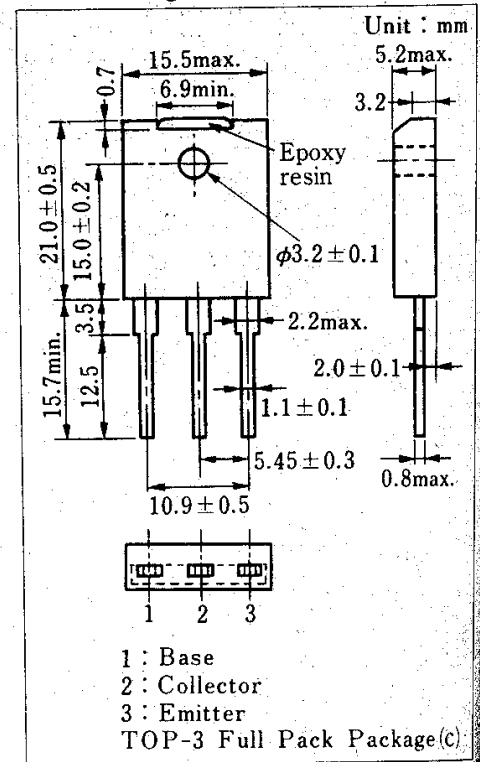

■ Electrical Characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
Collector cutoff current	I_{CBO}	$V_{CB}=500\text{ V}, I_E=0$			100	μA
Emitter cutoff current	I_{EBO}	$V_{EB}=5\text{ V}, I_C=0$			100	μA
Collector-emitter voltage	$V_{CEO(sus)}$	$I_C=0.2\text{ A}, L=25\text{ mH}$	400			V
DC current gain	h_{FE1}	$V_{CE}=5\text{ V}, I_C=0.1\text{ A}$	15			
	h_{FE2}	$V_{CE}=5\text{ V}, I_C=5\text{ A}$	8			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=5\text{ A}, I_B=1\text{ A}$			1	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=5\text{ A}, I_B=1\text{ A}$			1.5	V
Transition frequency	f_T	$V_{CE}=10\text{ V}, I_C=0.5\text{ A}, f=1\text{ MHz}$		11		MHz
Turn-on time	t_{on}	$I_C=5\text{ A}, I_{B1}=1\text{ A}, I_{B2}=-1\text{ A}$ $V_{CC}=150\text{ V}$			1	μs
Storage time	t_{stg}				2.5	μs
Collector current fall time	t_f				1	μs