

## REPETITIVE AVALANCHE AND $dv/dt$ RATED HEXFET<sup>®</sup> TRANSISTORS THRU-HOLE (TO-204AA/AE)

**IRF330**  
**JANTX2N6760**  
**JANTXV2N6760**  
**[REF:MIL-PRF-19500/542]**  
**400V, N-CHANNEL**

### Product Summary

| Part Number | BVDSS | RDS(on) | Id   |
|-------------|-------|---------|------|
| IRF330      | 400V  | 1.00Ω   | 5.5A |

The HEXFET<sup>®</sup> technology is the key to International Rectifier's advanced line of power MOSFET transistors. The efficient geometry and unique processing of this latest "State of the Art" design achieves: very low on-state resistance combined with high transconductance; superior reverse energy and diode recovery  $dv/dt$  capability.

The HEXFET transistors also feature all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters.

They are well suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high energy pulse circuits.



**TO-3**

### Features:

- Repetitive Avalanche Ratings
- Dynamic  $dv/dt$  Rating
- Hermetically Sealed
- Simple Drive Requirements
- Ease of Paralleling

### Absolute Maximum Ratings

|                            | Parameter                       |                                           | Units |
|----------------------------|---------------------------------|-------------------------------------------|-------|
| Id @ VGS = 10V, TC = 25°C  | Continuous Drain Current        | 5.5                                       | A     |
| Id @ VGS = 10V, TC = 100°C | Continuous Drain Current        | 3.5                                       |       |
| IDM                        | Pulsed Drain Current ①          | 22                                        |       |
| PD @ TC = 25°C             | Max. Power Dissipation          | 75                                        | W     |
|                            | Linear Derating Factor          | 0.60                                      | W/°C  |
| VGS                        | Gate-to-Source Voltage          | ±20                                       | V     |
| EAS                        | Single Pulse Avalanche Energy ② | 1.7                                       | mJ    |
| IAR                        | Avalanche Current ①             | 5.5                                       | A     |
| EAR                        | Repetitive Avalanche Energy ①   | —                                         | mJ    |
| dv/dt                      | Peak Diode Recovery $dv/dt$ ③   | 4.0                                       | V/ns  |
| TJ                         | Operating Junction              | -55 to 150                                | °C    |
| TSTG                       | Storage Temperature Range       |                                           |       |
|                            | Lead Temperature                | 300 (0.063 in. (1.6mm) from case for 10s) |       |
|                            | Weight                          | 11.5 (typical)                            | g     |

For footnotes refer to the last page

**Electrical Characteristics @ T<sub>j</sub> = 25°C (Unless Otherwise Specified)**

|                                     | Parameter                                    | Min | Typ  | Max  | Units | Test Conditions                                                         |
|-------------------------------------|----------------------------------------------|-----|------|------|-------|-------------------------------------------------------------------------|
| BV <sub>DSS</sub>                   | Drain-to-Source Breakdown Voltage            | 400 | —    | —    | V     | V <sub>GS</sub> = 0V, I <sub>D</sub> = 1.0mA                            |
| ΔBV <sub>DSS</sub> /ΔT <sub>j</sub> | Temperature Coefficient of Breakdown Voltage | —   | 0.46 | —    | V/°C  | Reference to 25°C, I <sub>D</sub> = 1.0mA                               |
| R <sub>DS(on)</sub>                 | Static Drain-to-Source On-State Resistance   | —   | —    | 1.00 | Ω     | V <sub>GS</sub> = 10V, I <sub>D</sub> = 3.5A④                           |
|                                     |                                              | —   | —    | 1.22 |       | V <sub>GS</sub> = 10V, I <sub>D</sub> = 5.5A ④                          |
| V <sub>GS(th)</sub>                 | Gate Threshold Voltage                       | 2.0 | —    | 4.0  | V     | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA              |
| g <sub>fs</sub>                     | Forward Transconductance                     | 2.9 | —    | —    | S (S) | V <sub>DS</sub> > 15V, I <sub>DS</sub> = 3.5A④                          |
| I <sub>DSS</sub>                    | Zero Gate Voltage Drain Current              | —   | —    | 25   | μA    | V <sub>DS</sub> = 320V, V <sub>GS</sub> = 0V                            |
|                                     |                                              | —   | —    | 250  |       | V <sub>DS</sub> = 320V<br>V <sub>GS</sub> = 0V, T <sub>j</sub> = 125°C  |
| I <sub>GSS</sub>                    | Gate-to-Source Leakage Forward               | —   | —    | 100  | nA    | V <sub>GS</sub> = 20V                                                   |
| I <sub>GSS</sub>                    | Gate-to-Source Leakage Reverse               | —   | —    | -100 |       | V <sub>GS</sub> = -20V                                                  |
| Q <sub>g</sub>                      | Total Gate Charge                            | 17  | —    | 39   | nC    | V <sub>GS</sub> = 10V, I <sub>D</sub> = 5.5A<br>V <sub>DS</sub> = 200V  |
| Q <sub>gs</sub>                     | Gate-to-Source Charge                        | 2.0 | —    | 6.0  |       |                                                                         |
| Q <sub>gd</sub>                     | Gate-to-Drain ('Miller') Charge              | 8.0 | —    | 20   |       |                                                                         |
| t <sub>d(on)</sub>                  | Turn-On Delay Time                           | —   | —    | 30   | ns    | V <sub>DD</sub> = 200V, I <sub>D</sub> = 5.5A,<br>R <sub>G</sub> = 7.5Ω |
| t <sub>r</sub>                      | Rise Time                                    | —   | —    | 40   |       |                                                                         |
| t <sub>d(off)</sub>                 | Turn-Off Delay Time                          | —   | —    | 80   |       |                                                                         |
| t <sub>f</sub>                      | Fall Time                                    | —   | —    | 35   |       |                                                                         |
| L <sub>S</sub> + L <sub>D</sub>     | Total Inductance                             | —   | 6.1  | —    | nH    | Measured from the center of drain pad to center of source pad           |
| C <sub>iss</sub>                    | Input Capacitance                            | —   | 620  | —    | pF    | V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V<br>f = 1.0MHz               |
| C <sub>oss</sub>                    | Output Capacitance                           | —   | 200  | —    |       |                                                                         |
| C <sub>rss</sub>                    | Reverse Transfer Capacitance                 | —   | 75   | —    |       |                                                                         |





**Source-Drain Diode Ratings and Characteristics**

|                 | Parameter                              | Min                                                                                                                  | Typ | Max | Units | Test Conditions                                                                        |
|-----------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----|-----|-------|----------------------------------------------------------------------------------------|
| I <sub>S</sub>  | Continuous Source Current (Body Diode) | —                                                                                                                    | —   | 5.5 | A     |                                                                                        |
| I <sub>SM</sub> | Pulse Source Current (Body Diode) ①    | —                                                                                                                    | —   | 22  |       |                                                                                        |
| V <sub>SD</sub> | Diode Forward Voltage                  | —                                                                                                                    | —   | 1.4 | V     | T <sub>j</sub> = 25°C, I <sub>S</sub> =5.5A, V <sub>GS</sub> = 0V ④                    |
| t <sub>rr</sub> | Reverse Recovery Time                  | —                                                                                                                    | —   | 700 | nS    | T <sub>j</sub> = 25°C, I <sub>F</sub> = 5.5A, di/dt ≤100A/μs<br>V <sub>DD</sub> ≤50V ④ |
| Q <sub>RR</sub> | Reverse Recovery Charge                | —                                                                                                                    | —   | 6.2 | μc    |                                                                                        |
| t <sub>on</sub> | Forward Turn-On Time                   | Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by L <sub>S</sub> + L <sub>D</sub> . |     |     |       |                                                                                        |

**Thermal Resistance**

|                   | Parameter           | Min | Typ | Max  | Units | Test Conditions      |
|-------------------|---------------------|-----|-----|------|-------|----------------------|
| R <sub>thJC</sub> | Junction to Case    | —   | —   | 1.67 | °C/W  |                      |
| R <sub>thJA</sub> | Junction to Ambient | —   | —   | 30   |       | Typical socket mount |

For footnotes refer to the last page

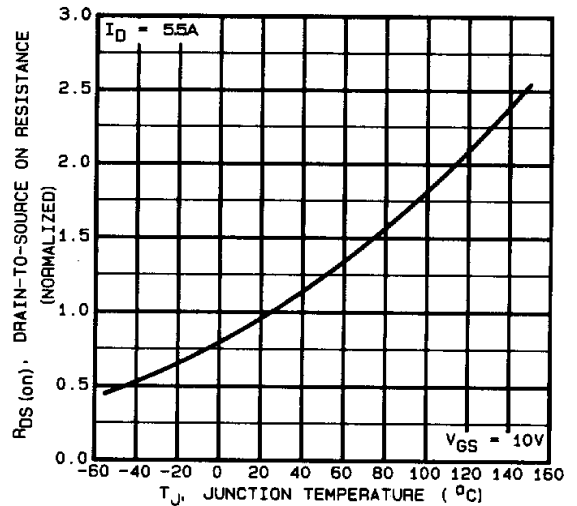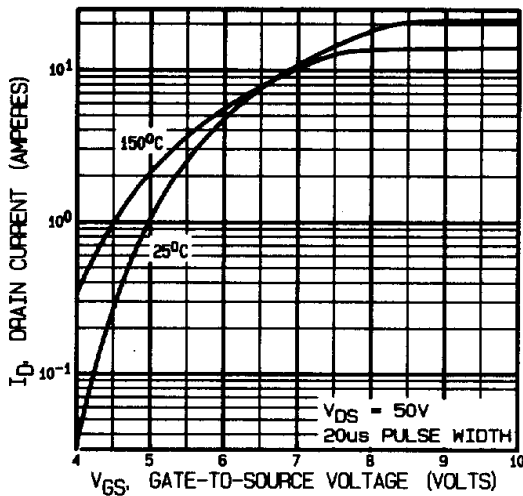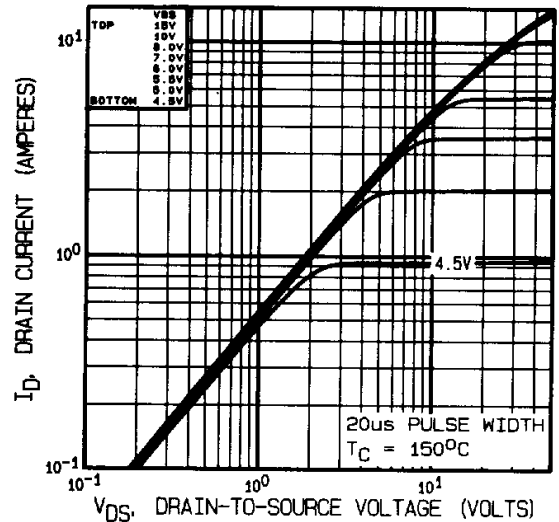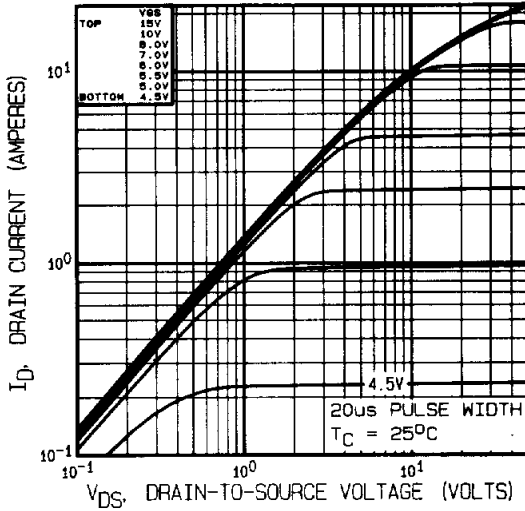

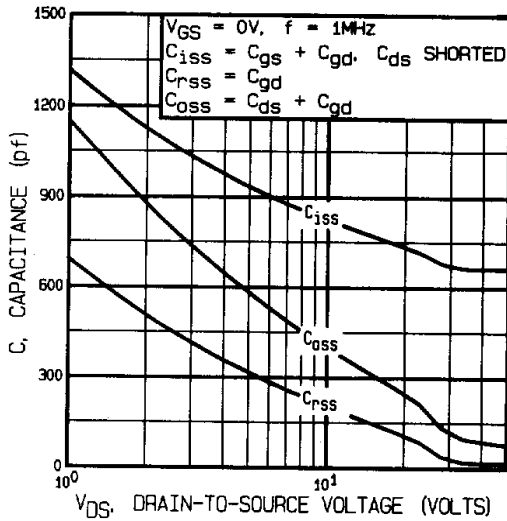


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

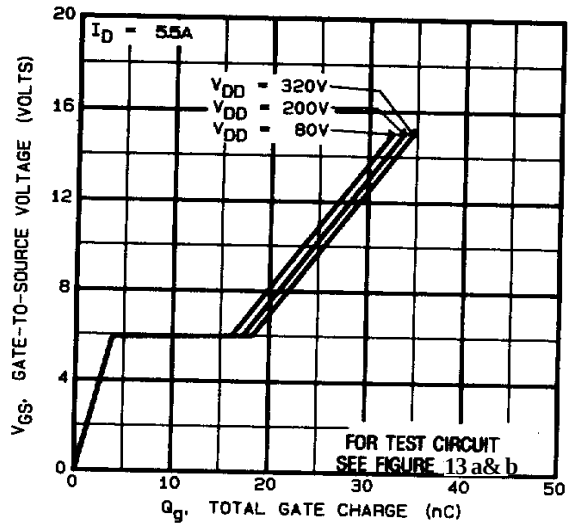


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

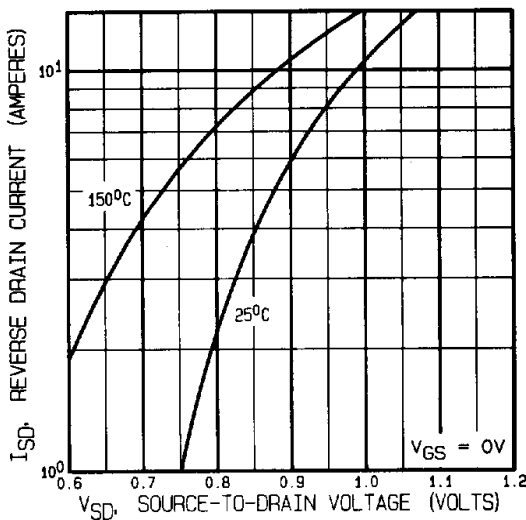


Fig 7. Typical Source-Drain Diode Forward Voltage

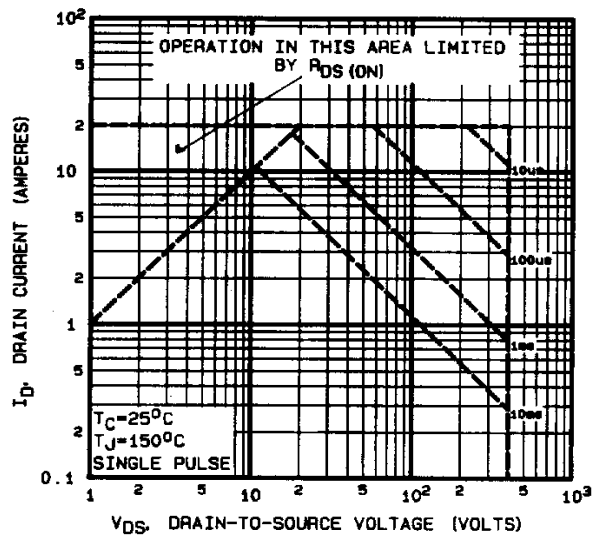


Fig 8. Maximum Safe Operating Area

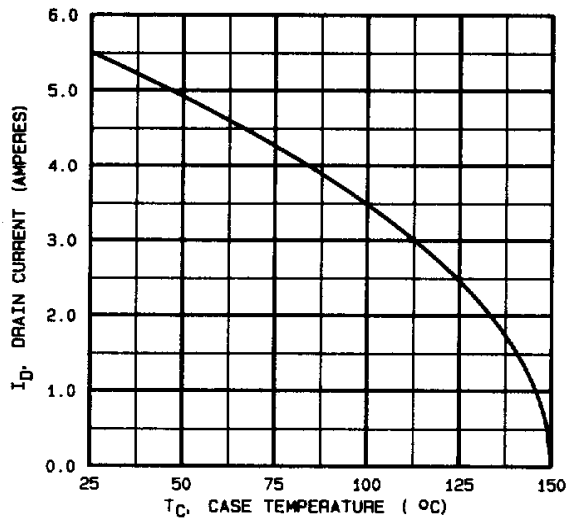


Fig 9. Maximum Drain Current Vs. Case Temperature

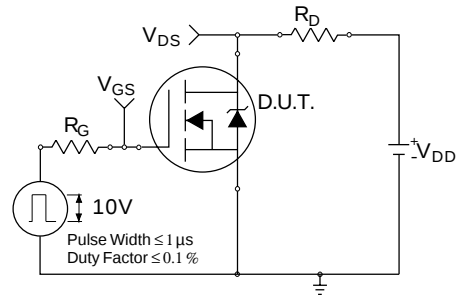


Fig 10a. Switching Time Test Circuit



Fig 10b. Switching Time Waveforms



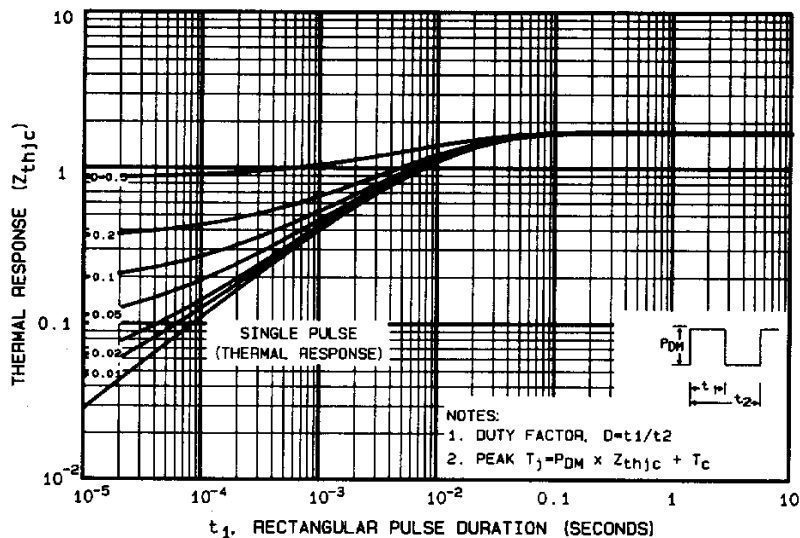



Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

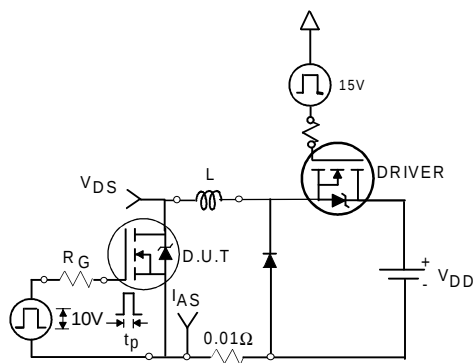


**Fig 12a.** Unclamped Inductive Test Circuit

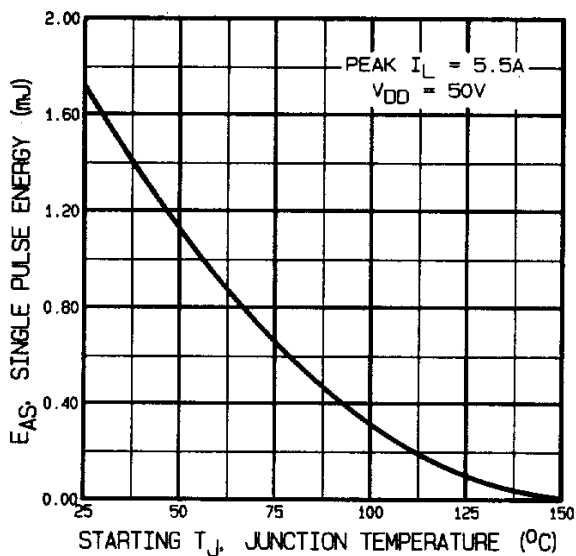


**Fig 12c.** Maximum Avalanche Energy Vs. Drain Current

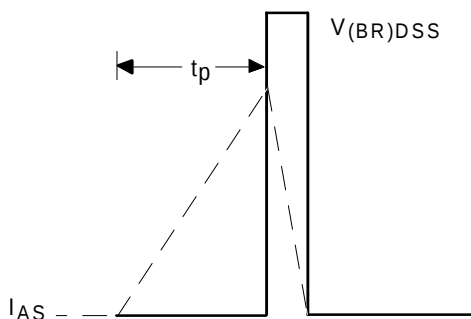

**Fig 12b.** Unclamped Inductive Waveforms

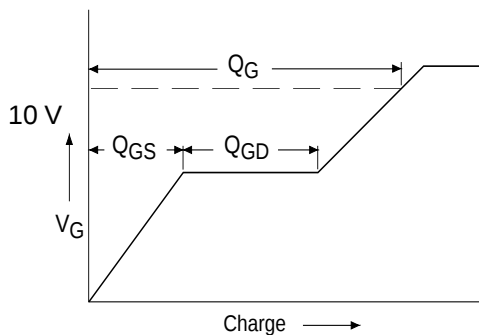

**Fig 13a.** Basic Gate Charge Waveform

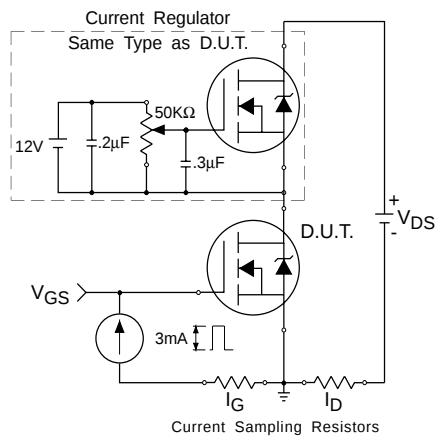


**Fig 13b.** Gate Charge Test Circuit

### Foot Notes:


- |                                                                           |                                                                                                                                |
|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| ① Repetitive Rating; Pulse width limited by maximum junction temperature. | ③ $I_{SD} \leq 5.5A$ , $di/dt \leq 90A/\mu s$ ,<br>$V_{DD} \leq 400V$ , $T_J \leq 150^\circ C$<br>Suggested $R_G = 7.5 \Omega$ |
| ② $V_{DD} = 50V$ , starting $T_J = 25^\circ C$ ,<br>Peak $I_L = 5.5A$ ,   | ④ Pulse width $\leq 300 \mu s$ ; Duty Cycle $\leq 2\%$                                                                         |

## Case Outline and Dimensions —TO-204AA (Modified TO-3)

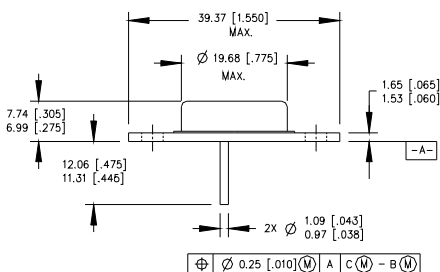

## PIN ASSIGNMENTS

| HEXFET           | SCHOTTKY                  | IGBT                 |
|------------------|---------------------------|----------------------|
| 1 – SOURCE       | 1 – ANODE 1               | 1 – GATE             |
| 2 – GATE         | 2 – ANODE 2               | 2 – EMITTER          |
| 3 – DRAIN (CASE) | 3 – COMMON CATHODE (CASE) | 3 – COLLECTOR (CASE) |

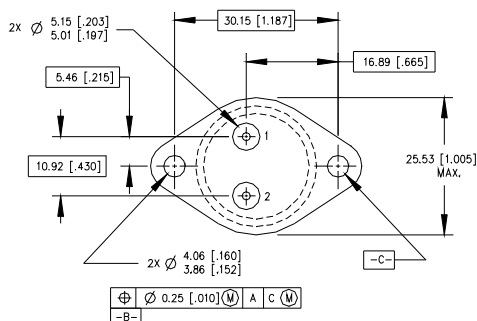

NOTES:

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION : INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE TO-204-AA.

# International IOR Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
**IR EUROPEAN REGIONAL CENTRE:** 439/445 Godstone Rd, Whyteleafe, Surrey CR3 0BL, UK Tel: ++ 44 (0)20 8645 8000  
**IR CANADA:** 15 Lincoln Court, Brampton, Ontario L6T3Z2, Tel: (905) 453 2200  
**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 (0) 6172 96590  
**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 011 451 0111  
**IR JAPAN:** K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo 171 Tel: 81 (0)3 3983 0086  
**IR SOUTHEAST ASIA:** 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994 Tel: ++ 65 (0)838 4630  
**IR TAIWAN:** 16 Fl. Suite D. 207, Sec. 2, Tun Haw South Road, Taipei, 10673 Tel: 886-(0)2 2377 9936  
*Data and specifications subject to change without notice. 01/01*