

81CNQ... SERIES

SCHOTTKY RECTIFIER

80 Amp

Major Ratings and Characteristics




Characteristics	81CNQ...	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM} range	35 to 45	V
I_{FSM} @ $t_p = 5 \mu s$ sine	4600	A
V_F @ 40 Apk, $T_J = 125^\circ C$ (per leg)	0.54	V
T_J range	-55 to 175	$^\circ C$

Description/Features

The 81CNQ center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 $^\circ C$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175 $^\circ C$ T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low profile, small footprint, high current package

Case Styles

81CNQ...	81CNQ...SM	81CNQ...SL
		
D61-8	D61-8-SM	D61-8-SL

Voltage Ratings

Part number	81CNQ035	81CNQ040	81CNQ045
V_R Max. DC Reverse Voltage (V)	35	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	81CNQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	80	A	50% duty cycle @ $T_C = 141^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	4600	A	5 μs Sine or 3 μs Rect. pulse
	790		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	54	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 8\text{ Amps}$, $L = 1.7\text{ mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	8	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	81CNQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.60	V	@ 40A
	0.74	V	@ 80A
	0.54	V	@ 40A
	0.66	V	@ 80A
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	5	mA	$T_J = 25^\circ\text{C}$
	45	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)	2600	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	81CNQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 175	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.85	$^\circ\text{C/W}$	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.42	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	7.8 (0.28)	g (oz.)	
T Mounting Torque (D61-8 Only)	Min. 40 (35)	Kg-cm (lbf-in)	
	Max. 58 (50)		

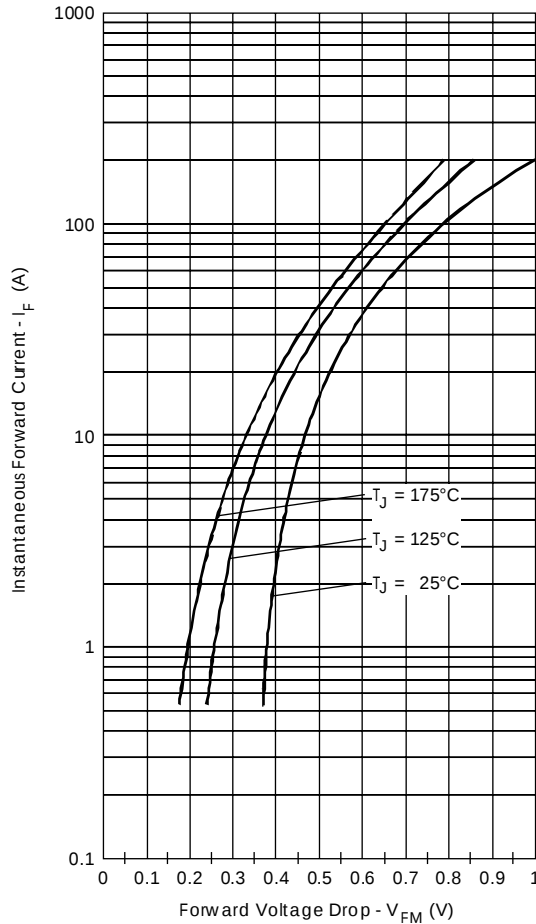


Fig. 1 - Max. Forward Voltage Drop Characteristics (PerLeg)

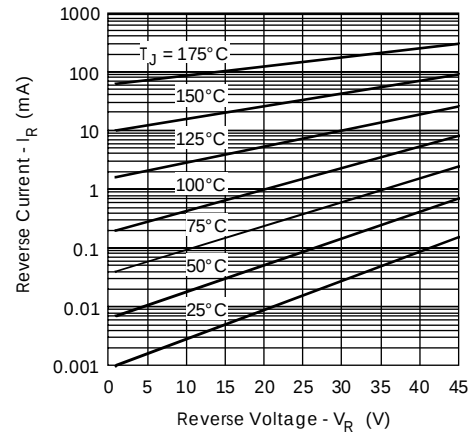


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

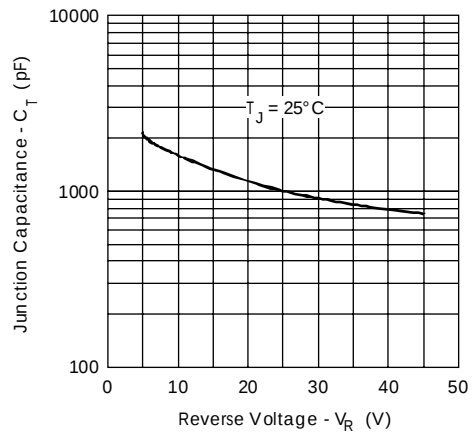


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

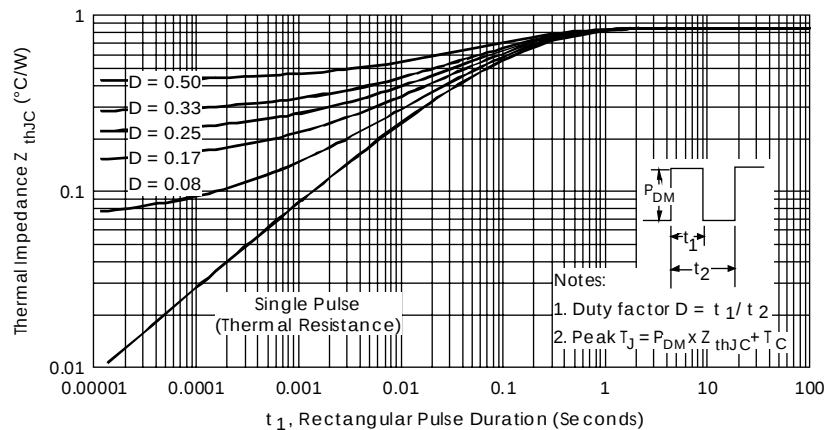


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

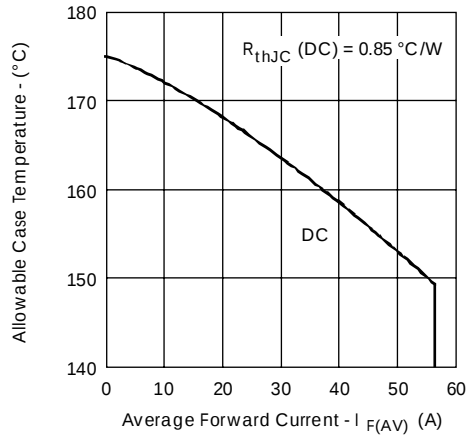


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

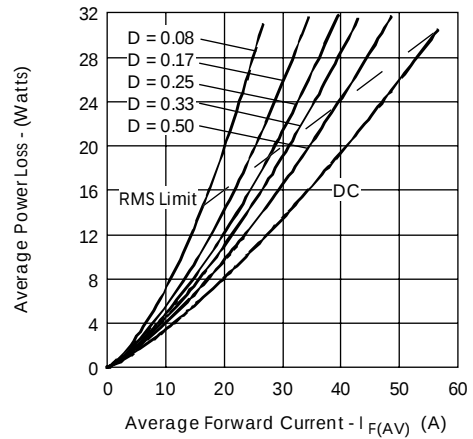


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

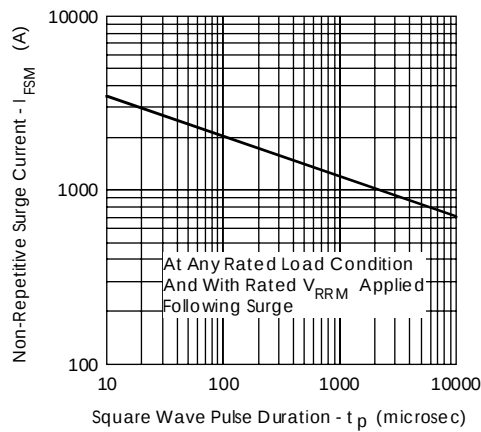


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


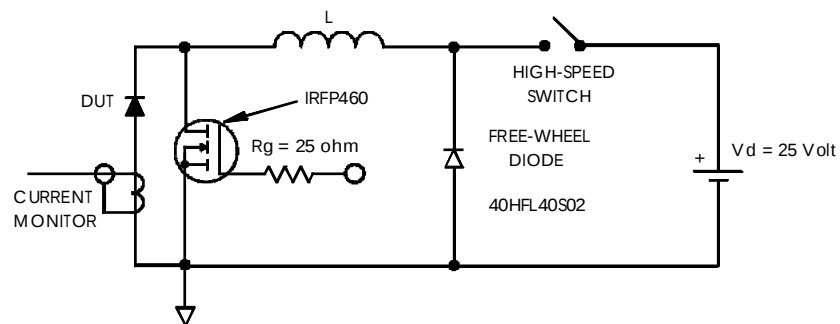


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table

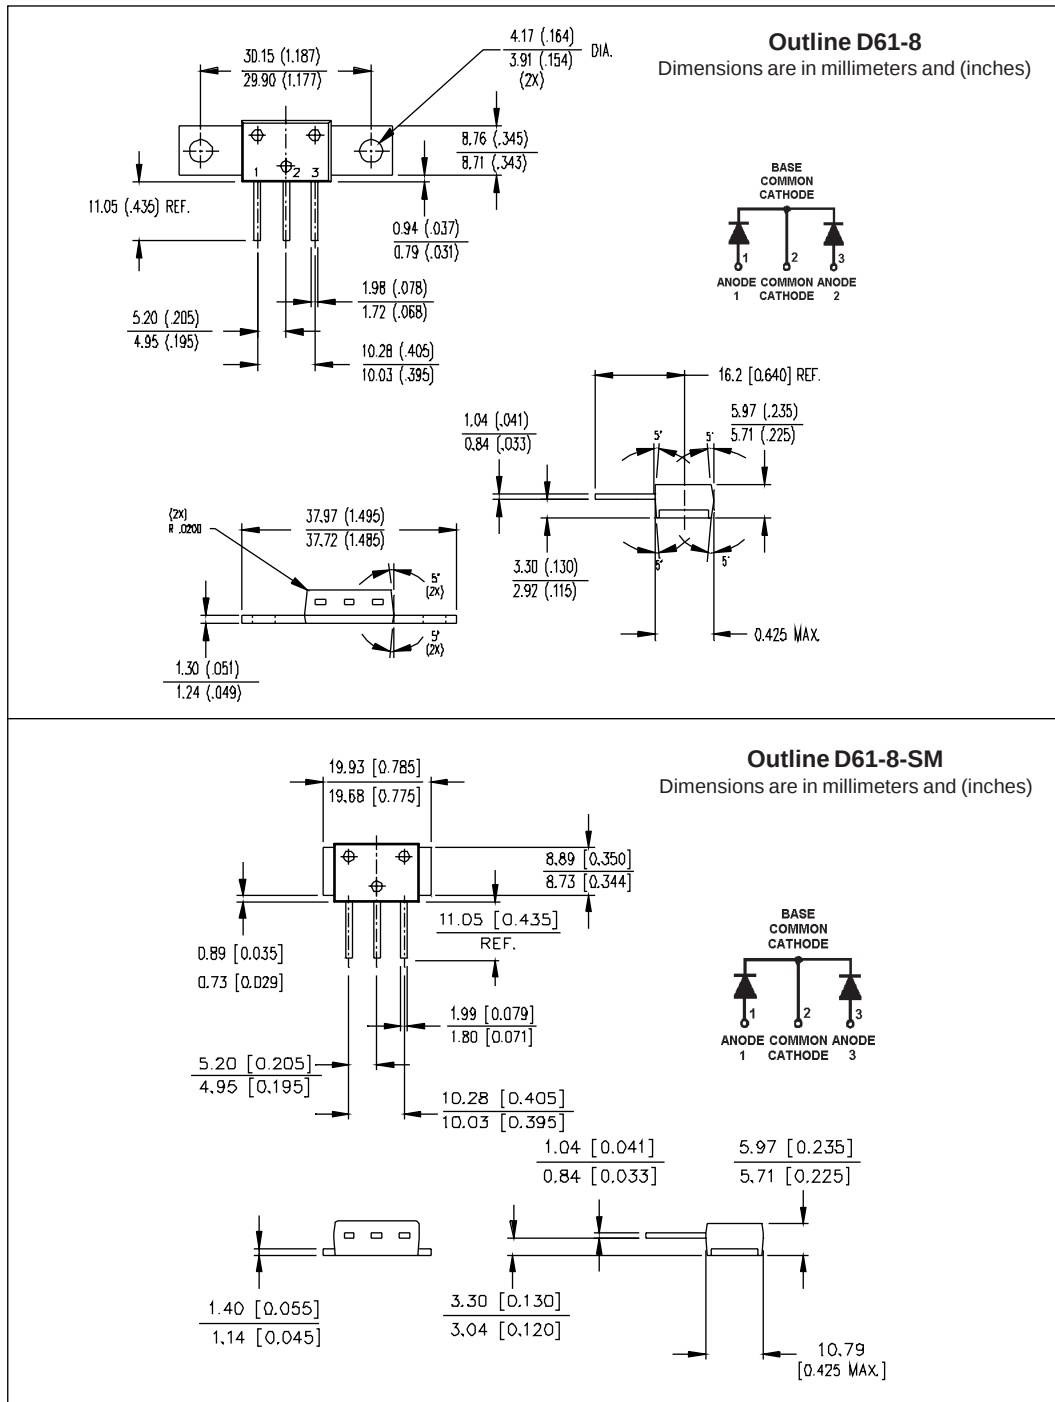

Outline D61-8-SL
Dimensions are in millimeters and (inches)

Top View:

- Overall width: 19.93 [.785]
- Distance from left edge to center of pin 1: 0.89 [.035]
- Distance from left edge to center of pin 2: 0.73 [.029]
- Distance from left edge to center of pin 3: 5.59 [.220]
- Distance from left edge to center of pin 4: 5.08 [.200]
- Distance from left edge to center of pin 5: 5.20 [.205]
- Distance from left edge to center of pin 6: 4.95 [.195]
- Distance from center of pin 1 to center of pin 2: 19.68 [.775]
- Distance from center of pin 2 to center of pin 3: 8.89 [.350]
- Distance from center of pin 3 to center of pin 4: 8.73 [.344]
- Distance from center of pin 4 to center of pin 5: 2.67 [.105]
- Distance from center of pin 5 to center of pin 6: 2.16 [.085]
- Distance from center of pin 6 to center of pin 7: 1.98 [.078]
- Distance from center of pin 7 to center of pin 8: 1.72 [.068]

Side View:

- Overall height: 5.33 [.210]
- Distance from base to top of pin 1: 3.97 [.1564]
- Distance from base to top of pin 2: 3.68 [.145]
- Distance from base to top of pin 3: 2.41 [.0950]
- Distance from base to top of pin 4: 2.16 [.085]
- Distance from base to top of pin 5: 0.035 [.009]
- Distance from base to top of pin 6: 5.97 [.235]
- Distance from base to top of pin 7: 5.71 [.225]
- Distance from base to top of pin 8: 3.30 [.130]
- Distance from base to top of pin 9: 3.05 [.120]
- Distance from base to top of pin 10: 10.79 [.425] MAX.

Detail "A":

- Radius: R 0.51 [.020]
- Radius: R 0.76 [.03]
- Radius: R 1.07 [.042]
- Radius: R 0.82 [.032]
- Radius: R 0.508 [R .02]
- Angle: 2X 5°

Foot Print:

- Overall width: 19.93 [.785]
- Distance from left edge to center of pin 1: 0.89 [.035]
- Distance from left edge to center of pin 2: 0.73 [.029]
- Distance from left edge to center of pin 3: 5.59 [.220]
- Distance from left edge to center of pin 4: 5.08 [.200]
- Distance from left edge to center of pin 5: 5.20 [.205]
- Distance from left edge to center of pin 6: 4.95 [.195]
- Distance from left edge to center of pin 7: 19.68 [.775]
- Distance from left edge to center of pin 8: 8.89 [.350]
- Distance from left edge to center of pin 9: 8.73 [.344]
- Distance from left edge to center of pin 10: 14.22 [.560]
- Distance from left edge to center of pin 11: 13.71 [.540]
- Distance from left edge to center of pin 12: 1.98 [.078]
- Distance from left edge to center of pin 13: 1.72 [.068]
- Distance from left edge to center of pin 14: 0.64 [.025] REF. (2X)
- Distance from left edge to center of pin 15: 0.89 [.035] (2X)
- Distance from left edge to center of pin 16: 0.73 [.029] (2X)
- Distance from left edge to center of pin 17: 10.16 [.400] REF.

Notes:

- Base Common Cathode
- Anode 1
- Anode 2
- Solderable Area.

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 455 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207. Sec. 2. Tun Haw South Road. Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.