



83CNQ...A SERIES

SCHOTTKY RECTIFIER
New GenIII D-61 Package

80 Amp




Major Ratings and Characteristics

Characteristics	83CNQ...A	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM} range	80 to 100	V
I_{FSM} @tp=5 μ s sine	7000	A
V_F @40Apk, $T_J=125^{\circ}C$ (per leg)	0.67	V
T_J range	-55to 175	$^{\circ}C$

Description/Features

The 83CNQ...A center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 $^{\circ}C$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175 $^{\circ}C$ T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- *New fully transfer-mold low profile, small footprint, high current package*

Case Styles		
83CNQ...A  BASE COMMON CATHODE  ANODE 1 COMMON CATHODE ANODE 2 D61-8	83CNQ...ASM  BASE COMMON CATHODE  ANODE 1 COMMON CATHODE ANODE 2 D61-8-SM	83CNQ...ASL  BASE COMMON CATHODE  ANODE 1 COMMON CATHODE ANODE 2 D61-8-SL

Voltage Ratings

Part number	83CNQ080A	83CNQ100A
V_R Max. DC Reverse Voltage (V)	80	100
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	83CNQ	Units	Conditions		
I _{F(AV)} Max. Average Forward Current * See Fig. 5	80	A	50% duty cycle @ T _C = 132 °C, rectangular waveform		
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	7000	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V _{RRM} applied	
	720		10ms Sine or 6ms Rect. pulse		
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	T _J = 25 °C, I _{AS} = 1 Amps, L = 30 mH		
I _{AR} Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical		

Electrical Specifications

Parameters		83CNQ	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.81	V	@ 40A	$T_J = 25\text{ }^{\circ}\text{C}$
		1.00	V	@ 80A	
		0.67	V	@ 40A	$T_J = 125\text{ }^{\circ}\text{C}$
		0.82	V	@ 80A	
I_{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.5	mA	$T_J = 25\text{ }^{\circ}\text{C}$	$V_R = \text{rated } V_R$
		35	mA	$T_J = 125\text{ }^{\circ}\text{C}$	
C_T	Max. Junction Capacitance (PerLeg)	1400	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C	
L_S	Typical Series Inductance (PerLeg)	5.5	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V_R)	10000	V/ μs		

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	83CNQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 175	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.85	$^\circ\text{C/W}$	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.42	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	$^\circ\text{C/W}$	Mounting surface, smooth and greased Device flatness < 5 mils
wt Approximate Weight	7.8(0.28)	g(oz.)	
T Mounting Torque	Min. 12(10) Max. 24(20)	Kg-cm (lbf-in)	(*)

(*) Recommended hardware 3M stainless screw

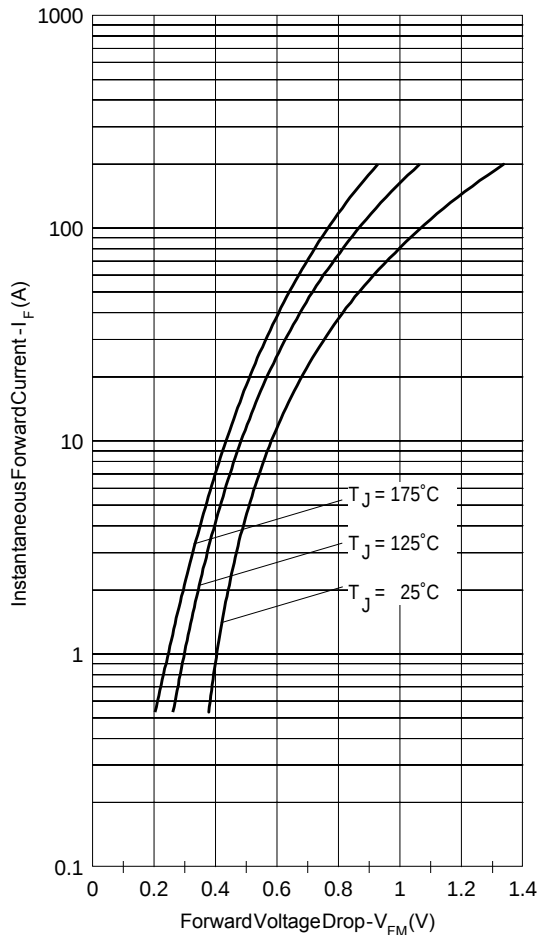


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

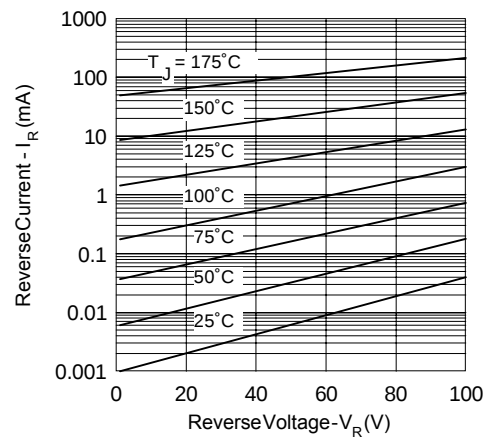


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

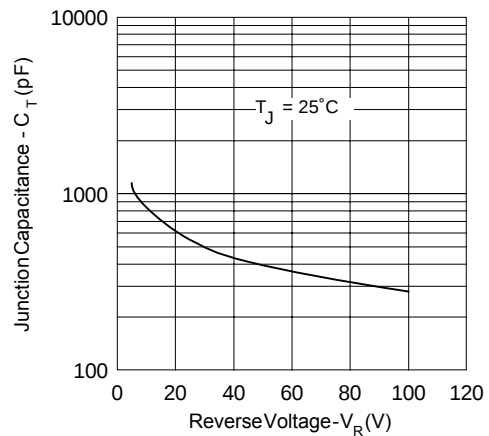


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

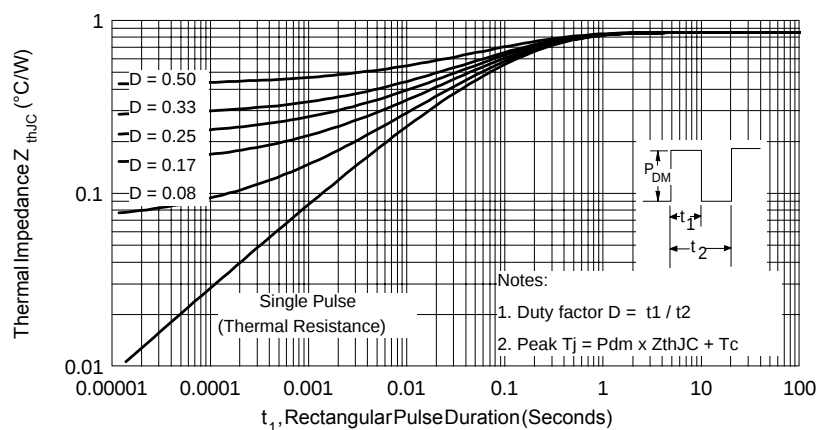


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

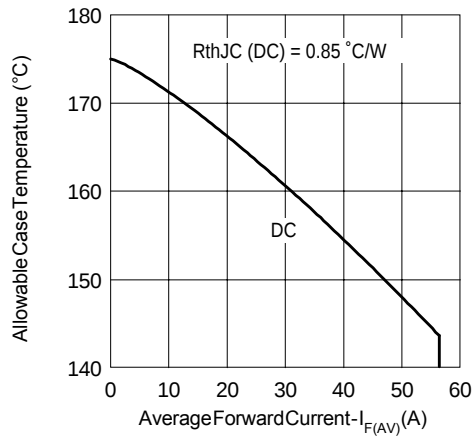


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

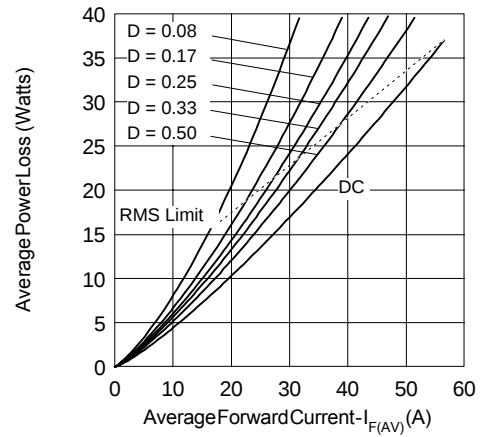


Fig. 6- Forward Power Loss Characteristics (Per Leg)

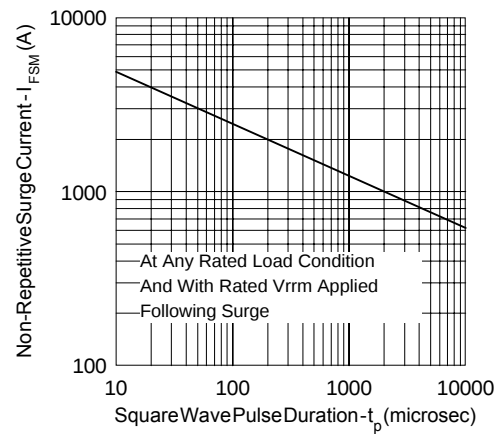


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)


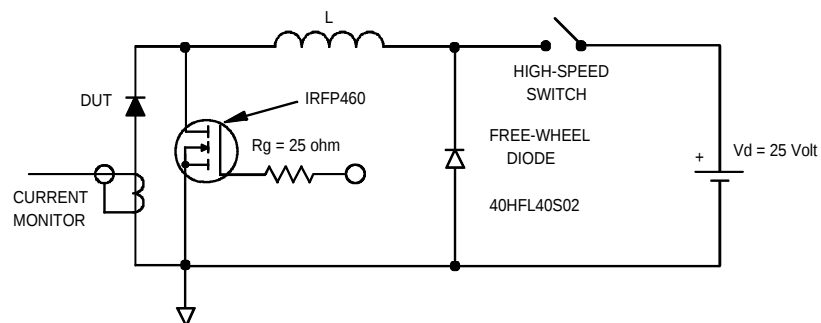


Fig. 8- Unclamped Inductive Test Circuit

Outline Table

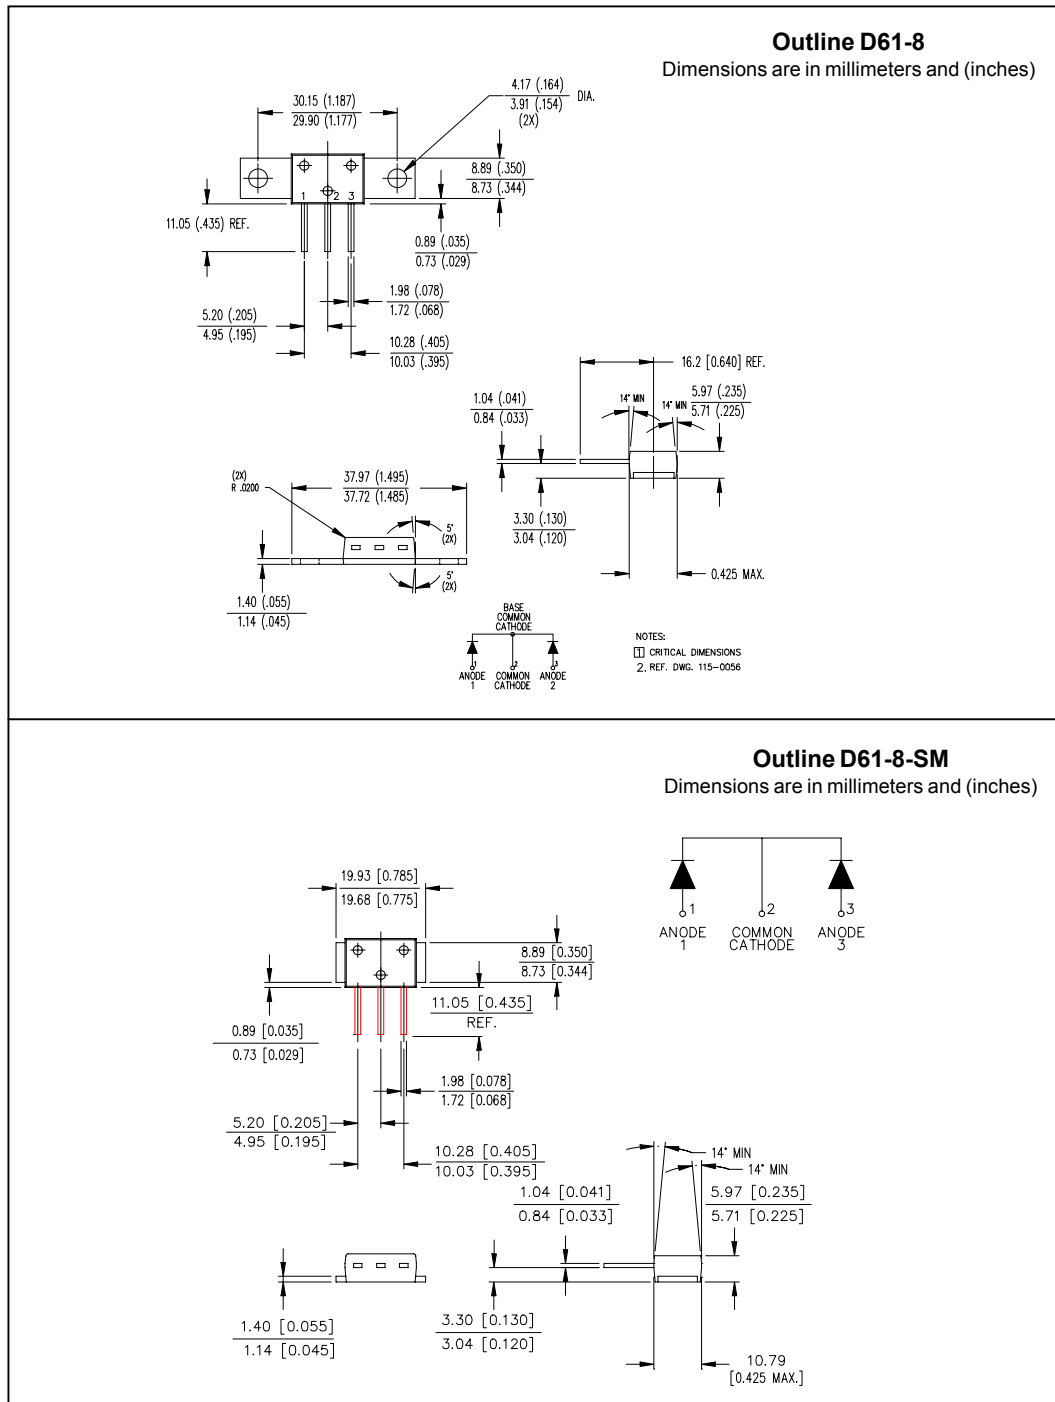

Outline D61-8-SL


Dimensions are in millimeters and (inches)

The drawing includes the following views and dimensions:

- Top View:** Shows a rectangular component with a central square feature. Dimensions include 19.93 [.785] and 19.68 [.775] for the overall width, 8.89 [.350] and 8.73 [.344] for the central feature width, 0.89 [.035] and 0.73 [.029] for the central feature height, 5.59 [.220] and 5.08 [.200] for the side feature height, 2.67 [.105] and 2.16 [.085] for the side feature width, 1.98 [.078] and 1.72 [.068] for the bottom feature width, 5.20 [.205] and 4.95 [.195] for the bottom feature height, and 1.40 [.055] and 1.14 [.045] for the bottom feature width.
- Side View:** Shows the profile of the component. Dimensions include 19.93 [.785] and 19.68 [.775] for the overall width, 16.13 [.635] and 15.88 [.625] for the top feature width, 14.22 [.560] and 13.71 [.540] for the top feature height, 8.89 [.350] and 8.73 [.344] for the top feature width, 0.89 [.035] and 0.73 [.029] (2X) for the top feature height, 0.64 [.025] REF. (2X) for the top feature width, 3.97 [.156] and 3.68 [.145] for the side feature height, 5.59 [.220] and 5.08 [.200] for the side feature width, 1.98 [.078] and 1.72 [.068] (2X) for the bottom feature width, and 10.16 (.400) REF. for the bottom feature height.
- Detail "A":** A magnified view of the corner of the component. Dimensions include R 0.51 [.020] and R 0.76 [.03] for the corner radius, 1.04 [.041] and 0.84 [.033] for the corner width, 5.97 [.235] and 5.71 [.225] for the corner height, 3.30 [.130] and 3.05 [.120] for the corner width, 10.79 [.425] MAX. for the corner height, and 5.33 [.210] for the corner width.
- Bottom View:** Shows the base of the component. Dimensions include 19.93 [.785] and 19.68 [.775] for the overall width, 16.13 [.635] and 15.88 [.625] for the top feature width, 14.22 [.560] and 13.71 [.540] for the top feature height, 8.89 [.350] and 8.73 [.344] for the top feature width, 0.89 [.035] and 0.73 [.029] (2X) for the top feature height, 0.64 [.025] REF. (2X) for the top feature width, 3.97 [.156] and 3.68 [.145] for the side feature height, 5.59 [.220] and 5.08 [.200] for the side feature width, 1.98 [.078] and 1.72 [.068] (2X) for the bottom feature width, and 10.16 (.400) REF. for the bottom feature height.
- Electrical Connections:** The component has two electrical connections labeled ANODE 1 and ANODE 2, which are connected to a common cathode.


Part Marking Information

EXAMPLE: THIS IS A 83CNQ100A WITH
LOT CODE 89 09
ASSEMBLED ON WW 45, 2000
IN THE ASSEMBLY LINE "A"

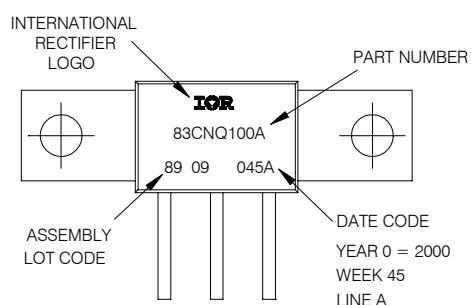


D61-8

EXAMPLE: THIS IS A 83CNQ100ASM WITH
LOT CODE 89 09
ASSEMBLED ON WW 45, 2000
IN THE ASSEMBLY LINE "A"

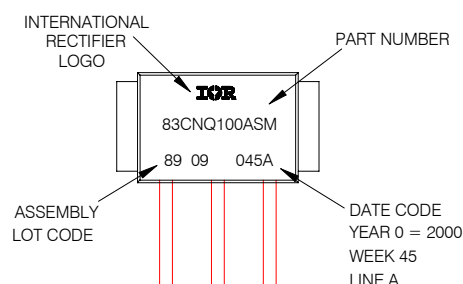

D61-8-SM

EXAMPLE: THIS IS A 83CNQ100ASL WITH
LOT CODE 89 09
ASSEMBLED ON WW 45, 2000
IN THE ASSEMBLY LINE "A"

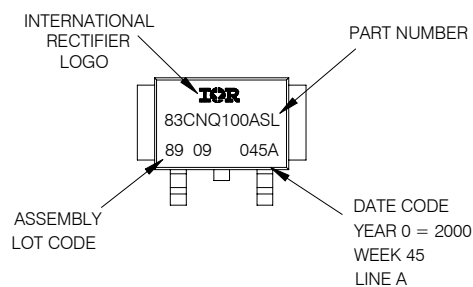

D61-8-SL

83CNQ...A Series

Bulletin PD-20042 rev. C 09/01

International
IR Rectifier

```
83CNQ100A
*****
* This model has been developed by *
* Wizard SPICE MODEL GENERATOR (1999) *
* (International Rectifier Corporation) *
* contains Proprietary Information *
*****
* SPICE Model Diode is composed by a *
* simple diode plus paralalled VCG2T *
*****
.SUBCKT 83CNQ100A ANO CAT
D1 ANO 1 DMOD (0.20831)
*Define diode model
.MODEL DMOD D(IS=3.91765102575707E-04A,N=1.6412007115037,BV=110V,
+IBV=1.66611874283115A,RS=0.001083212,CJO=1.31909764291715E-08,
+VJ=1.04145964983498,XTI=2,EG=0.757359996913038)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=-5.06642501757023)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP((((2.558893E-02/-5.066425)*(V(2,CAT)*1E6)/(I(VX)+1E-6)-1))+1)*3.120336E-
03*ABS(V(ANO,CAT)))-1)}
*****
.ENDS 83CNQ100A

Thermal Model Subcircuit
.SUBCKT 83CNQ100A 5 1

CTHERM1      5      4      8.75E-04
CTHERM2      4      3      1.99E+00
CTHERM3      3      2      2.04E+01
CTHERM4      2      1      2.41E+02

R THERM1      5      4      1.00E-07
R THERM2      4      3      4.51E-01
R THERM1      3      2      3.08E-01
R THERM1      2      1      7.27E-02

.ENDS 83CNQ100A
```

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 09/01