

# IRFL4310



## HEXFET® Power MOSFET

- Surface Mount
- Dynamic dv/dt Rating
- Fast Switching
- Ease of Paralleling
- Advanced Process Technology
- Ultra Low On-Resistance

### Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The SOT-223 package is designed for surface-mount using vapor phase, infra red, or wave soldering techniques. Its unique package design allows for easy automatic pick-and-place as with other SOT or SOIC packages but has the added advantage of improved thermal performance due to an enlarged tab for heatsinking. Power dissipation of 1.0W is possible in a typical surface mount application.

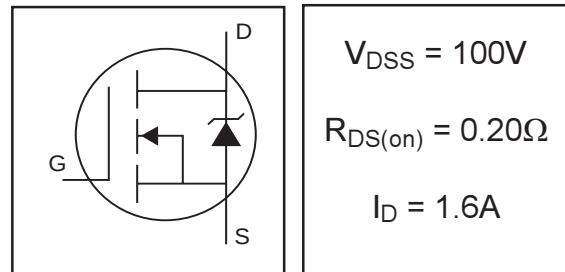

SOT-223

### Absolute Maximum Ratings

|                          | Parameter                                     | Max.         | Units |
|--------------------------|-----------------------------------------------|--------------|-------|
| $I_D @ T_A = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V^{**}$ | 2.2          | A     |
| $I_D @ T_A = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V^*$    | 1.6          |       |
| $I_D @ T_A = 70^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V^*$    | 1.3          |       |
| $I_{DM}$                 | Pulsed Drain Current ①                        | 13           |       |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation (PCB Mount)**               | 2.1          | W     |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation (PCB Mount)*                | 1.0          | W     |
|                          | Linear Derating Factor (PCB Mount)*           | 8.3          | mW/°C |
| $V_{GS}$                 | Gate-to-Source Voltage                        | $\pm 20$     | V     |
| $E_{AS}$                 | Single Pulse Avalanche Energy②                | 47           | mJ    |
| $I_{AR}$                 | Avalanche Current①                            | 1.6          | A     |
| $E_{AR}$                 | Repetitive Avalanche Energy①*                 | 0.10         | mJ    |
| dv/dt                    | Peak Diode Recovery dv/dt ③                   | 5.0          | V/ns  |
| $T_J, T_{STG}$           | Junction and Storage Temperature Range        | -55 to + 150 | °C    |

### Thermal Resistance

|                 | Parameter                                    | Typ. | Max. | Units |
|-----------------|----------------------------------------------|------|------|-------|
| $R_{\theta JA}$ | Junction-to-Amb. (PCB Mount, steady state)*  | 93   | 120  | °C/W  |
| $R_{\theta JA}$ | Junction-to-Amb. (PCB Mount, steady state)** | 48   | 60   |       |


\* When mounted on FR-4 board using minimum recommended footprint.

\*\* When mounted on 1 inch square copper board, for comparison with other SMD devices.

## Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

|                                 | Parameter                            | Min. | Typ. | Max. | Units              | Conditions                                           |
|---------------------------------|--------------------------------------|------|------|------|--------------------|------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 100  | —    | —    | V                  | $V_{GS} = 0V, I_D = 250\mu A$                        |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.12 | —    | $V/^\circ\text{C}$ | Reference to $25^\circ\text{C}$ , $I_D = 1\text{mA}$ |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | —    | 0.20 | $\Omega$           | $V_{GS} = 10V, I_D = 1.6A$ ④                         |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 2.0  | —    | 4.0  | V                  | $V_{DS} = V_{GS}, I_D = 250\mu A$                    |
| $g_{fs}$                        | Forward Transconductance             | 1.5  | —    | —    | S                  | $V_{DS} = 50V, I_D = 0.80\text{A}$                   |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —    | 25   | $\mu A$            | $V_{DS} = 100V, V_{GS} = 0V$                         |
|                                 |                                      | —    | —    | 250  |                    | $V_{DS} = 80V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —    | 100  | nA                 | $V_{GS} = 20V$                                       |
|                                 | Gate-to-Source Reverse Leakage       | —    | —    | -100 |                    | $V_{GS} = -20V$                                      |
| $Q_g$                           | Total Gate Charge                    | —    | 17   | 25   | nC                 | $I_D = 1.6A$                                         |
| $Q_{gs}$                        | Gate-to-Source Charge                | —    | 2.1  | 3.1  |                    | $V_{DS} = 80V$                                       |
| $Q_{gd}$                        | Gate-to-Drain ("Miller") Charge      | —    | 7.8  | 12   |                    | $V_{GS} = 10V$ , See Fig. 6 and 13 ④                 |
| $t_{d(on)}$                     | Turn-On Delay Time                   | —    | 7.8  | —    | ns                 | $V_{DD} = 50V$                                       |
| $t_r$                           | Rise Time                            | —    | 18   | —    |                    | $I_D = 1.6A$                                         |
| $t_{d(off)}$                    | Turn-Off Delay Time                  | —    | 34   | —    |                    | $R_G = 6.2\Omega$                                    |
| $t_f$                           | Fall Time                            | —    | 20   | —    |                    | $R_D = 31\Omega$ , See Fig. 10 ④                     |
| $C_{iss}$                       | Input Capacitance                    | —    | 330  | —    | pF                 | $V_{GS} = 0V$                                        |
| $C_{oss}$                       | Output Capacitance                   | —    | 92   | —    |                    | $V_{DS} = 25V$                                       |
| $C_{rss}$                       | Reverse Transfer Capacitance         | —    | 54   | —    |                    | $f = 1.0\text{MHz}$ , See Fig. 5                     |

## Source-Drain Ratings and Characteristics

|          | Parameter                                 | Min. | Typ. | Max. | Units | Conditions                                                                                                                                                       |
|----------|-------------------------------------------|------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —    | —    | 0.91 | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode.<br> |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —    | —    | 13   |       |                                                                                                                                                                  |
| $V_{SD}$ | Diode Forward Voltage                     | —    | —    | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 1.6A, V_{GS} = 0V$ ④                                                                                                              |
| $t_{rr}$ | Reverse Recovery Time                     | —    | 72   | 110  | ns    | $T_J = 25^\circ\text{C}, I_F = 1.6A$                                                                                                                             |
| $Q_{rr}$ | Reverse Recovery Charge                   | —    | 210  | 320  | nC    | $di/dt = 100A/\mu s$ ④                                                                                                                                           |


### Notes:

① Repetitive rating; pulse width limited by max. junction temperature. ( See fig. 11 )


②  $V_{DD} = 25V$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 9.2\text{mH}$   
 $R_G = 25\Omega$ ,  $I_{AS} = 3.2A$ . (See Figure 12)

③  $I_{SD} \leq 1.6A$ ,  $di/dt \leq 340A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  
 $T_J \leq 150^\circ\text{C}$


④ Pulse width  $\leq 300\mu s$ ; duty cycle  $\leq 2\%$ .

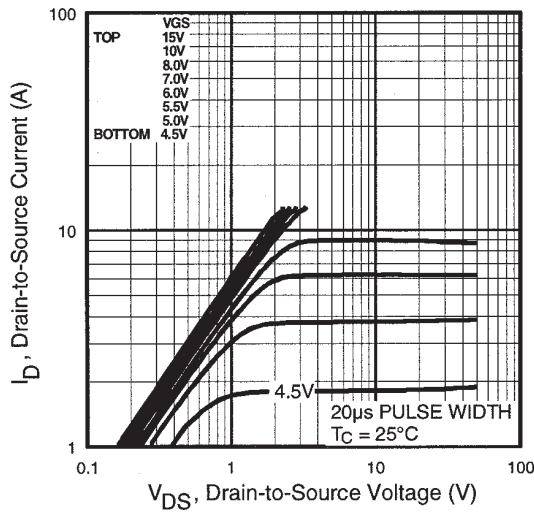


**Fig 1.** Typical Output Characteristics,

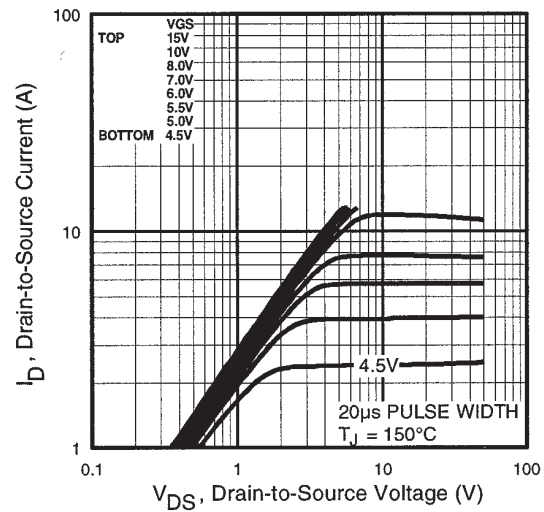


**Fig 2.** Typical Output Characteristics,

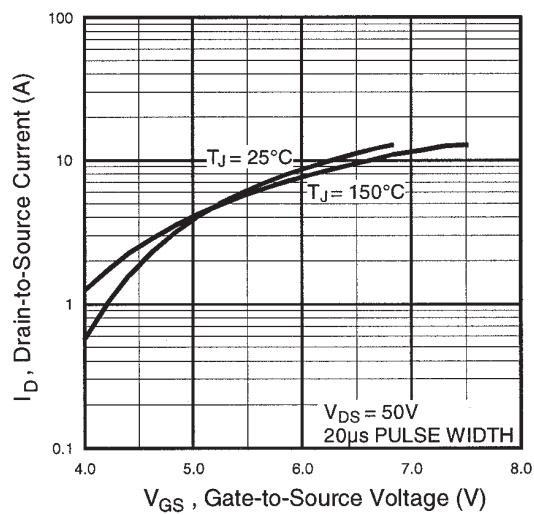


**Fig 3.** Typical Transfer Characteristics

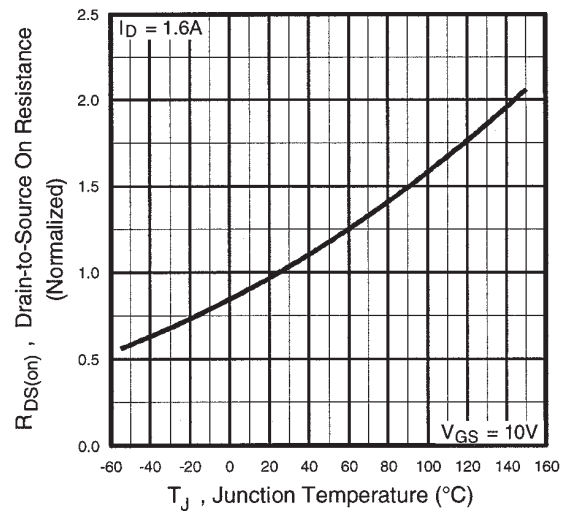


**Fig 4.** Normalized On-Resistance  
Vs. Temperature

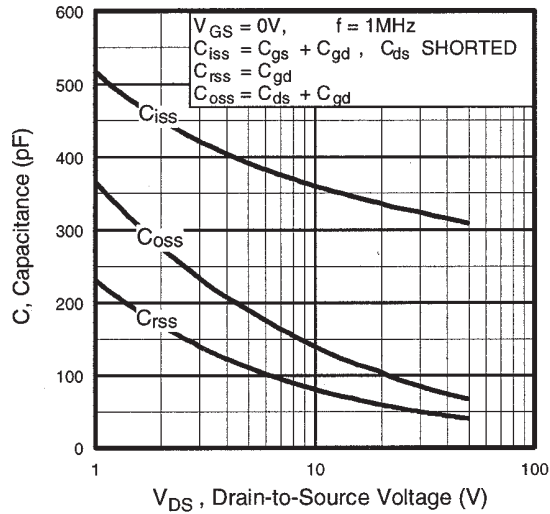


**Fig 5.** Typical Capacitance Vs. Drain-to-Source Voltage

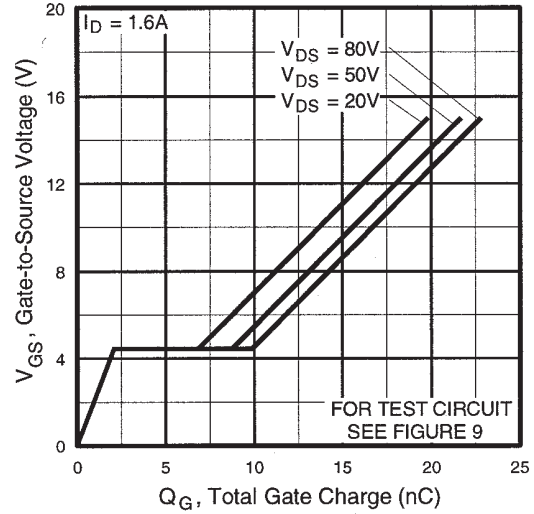


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

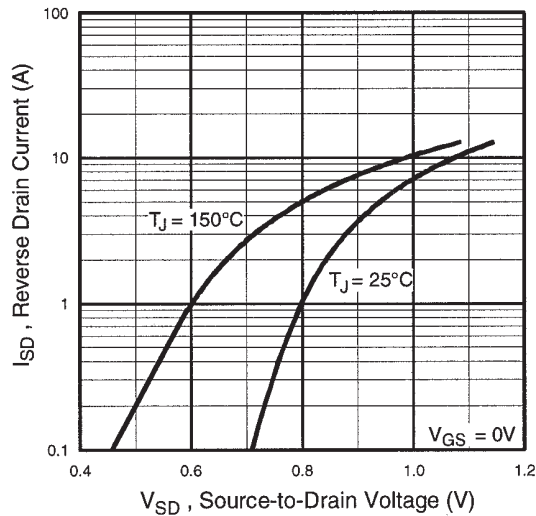


**Fig 7.** Typical Source-Drain Diode Forward Voltage

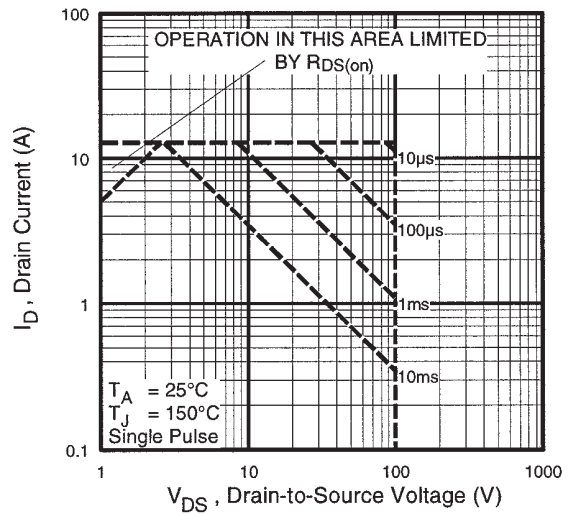


**Fig 8.** Maximum Safe Operating Area

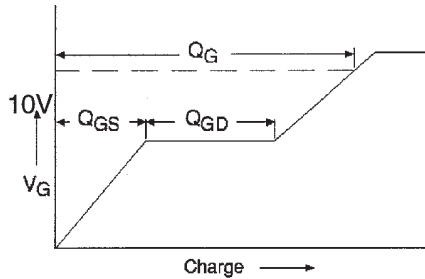


**Fig 9a.** Basic Gate Charge Waveform

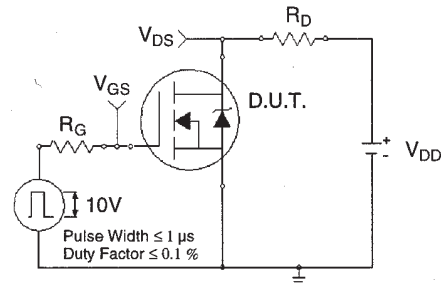


**Fig 10a.** Switching Time Test Circuit

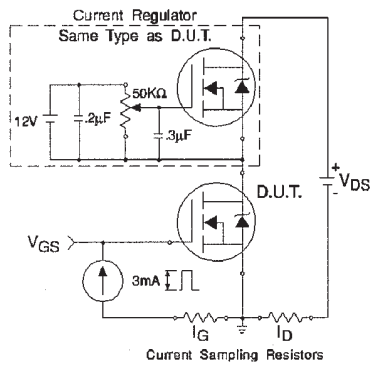


**Fig 9b.** Gate Charge Test Circuit

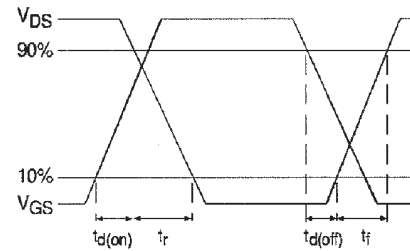


**Fig 10b.** Switching Time Waveforms

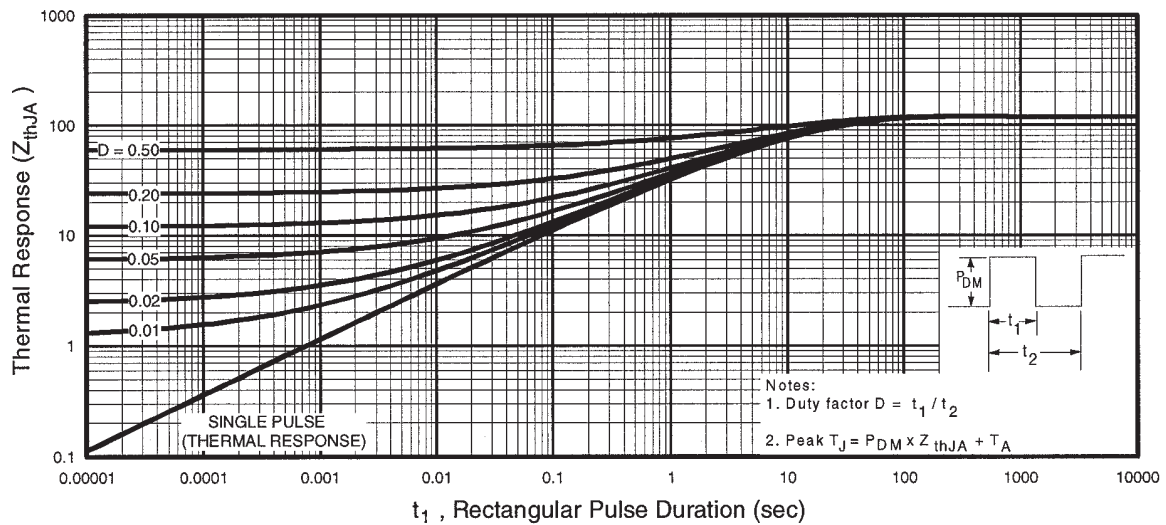


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

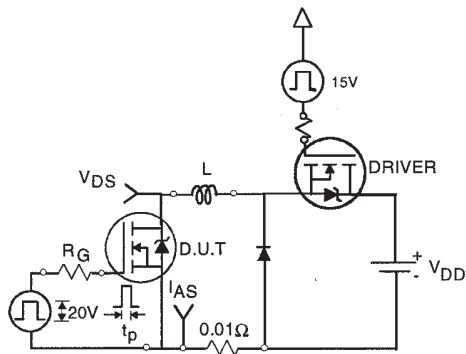

**Fig 12a.** Unclamped Inductive Test Circuit


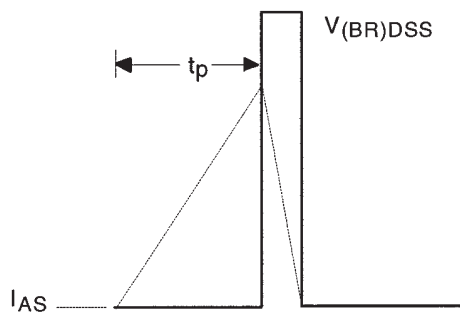


**Fig 12b.** Unclamped Inductive Waveforms

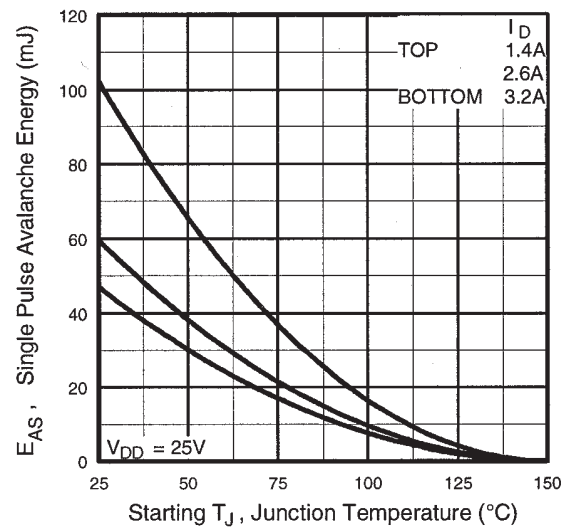

**Fig 12c.** Maximum Avalanche Energy  
Vs. Drain Current

### Peak Diode Recovery dv/dt Test Circuit

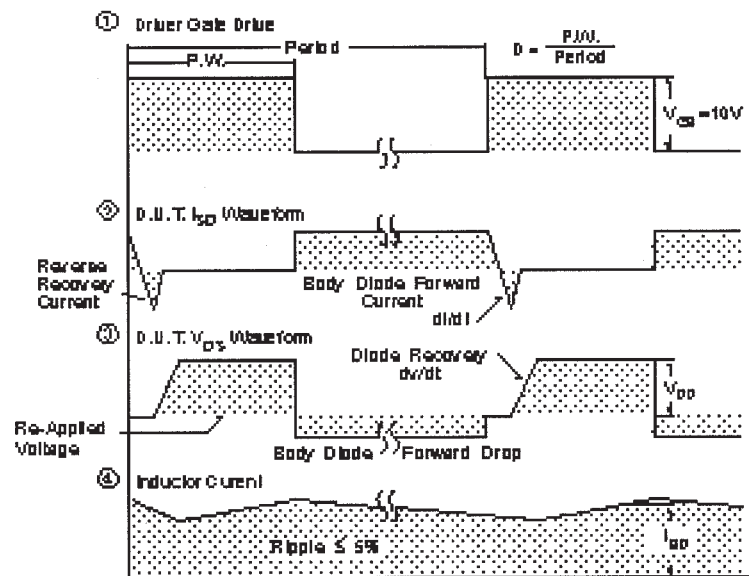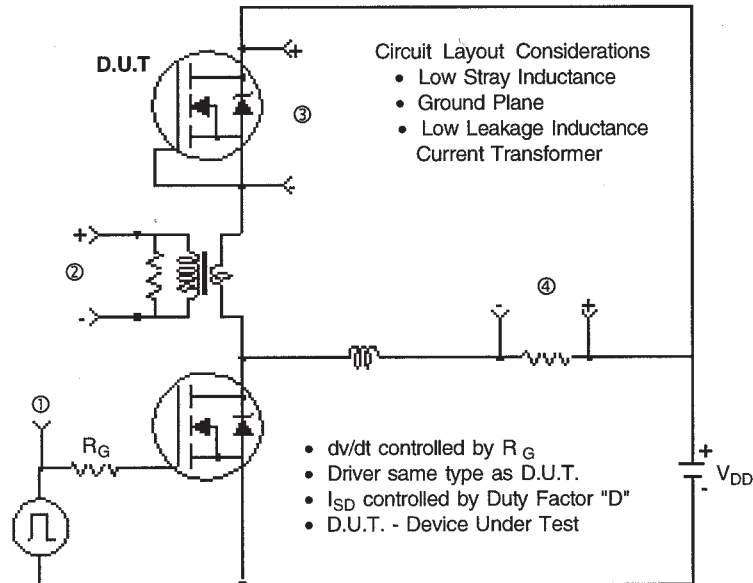


\*  $V_{GS} = 5V$  for Logic Level Devices

**Fig 13.** For N-Channel HEXFETS


# IRFL4310

International  
**IR** Rectifier


## Package Outline SOT-223 (TO-261AA) Outline

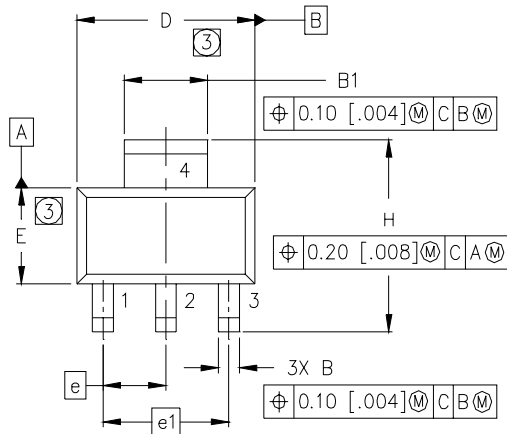

| DIM | MILLIMETERS |      | INCHES |      |
|-----|-------------|------|--------|------|
|     | MIN         | MAX  | MIN    | MAX  |
| A   | 1.55        | 1.80 | .061   | .071 |
| B   | 0.65        | 0.85 | .026   | .033 |
| B1  | 2.95        | 3.15 | .116   | .124 |
| C   | 0.25        | 0.35 | .010   | .014 |
| D   | 6.30        | 6.70 | .248   | .264 |
| E   | 3.30        | 3.70 | .130   | .146 |
| e   | 2.30        | BSC  | .0905  | BSC  |
| e1  | 4.60        | BSC  | .181   | BSC  |
| H   | 6.71        | 7.29 | .264   | .287 |
| L   | 0.91        | —    | .036   | —    |
| L1  | 0.061       | BSC  | .0024  | BSC  |
| θ   | —           | 10°  | —      | 10°  |

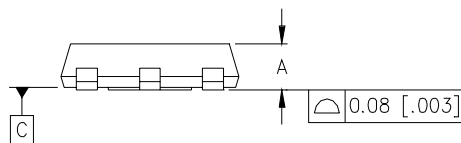


MINIMUM RECOMMENDED FOOTPRINT

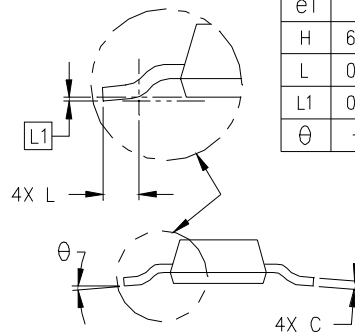

LEAD ASSIGNMENTS

- 1 = GATE
- 2 = DRAIN
- 3 = SOURCE
- 4 = DRAIN

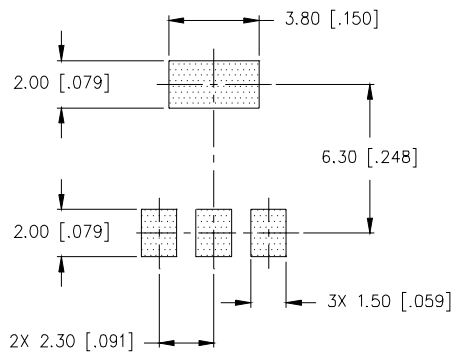



### NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
- ③ DIMENSIONS DO NOT INCLUDE MOLD FLASH.
4. OUTLINE CONFORMS TO JEDEC OUTLINE TO-261AA.
5. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].

## Part Marking Information


SOT-223

EXAMPLE: THIS IS AN IRFL014

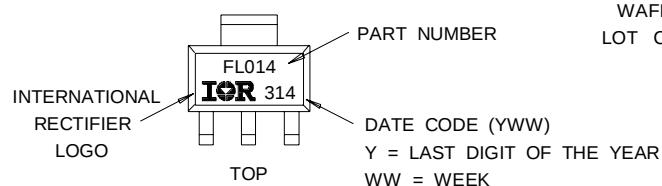


## Tape & Reel Information

### SOT-223 Outline

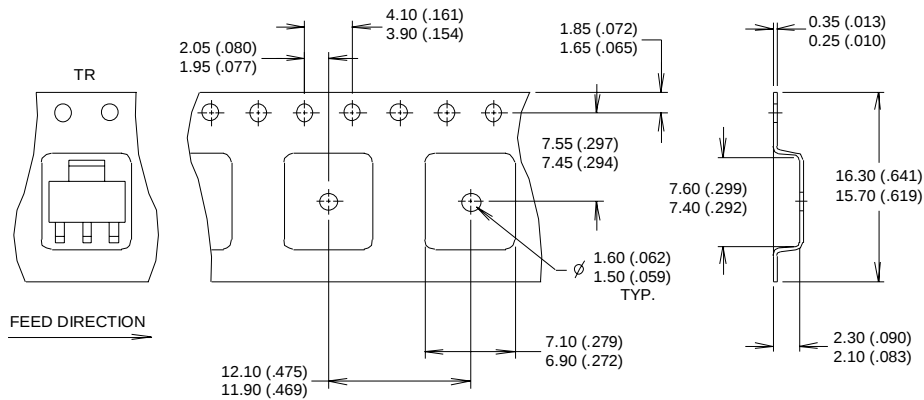

- NOTES :
1. CONTROLLING DIMENSION: MILLIMETER.
  2. OUTLINE CONFORMS TO EIA-481 & EIA-541.
  3. EACH  $\varnothing 330.00$  (13.00) REEL CONTAINS 2,500 DEVICES.

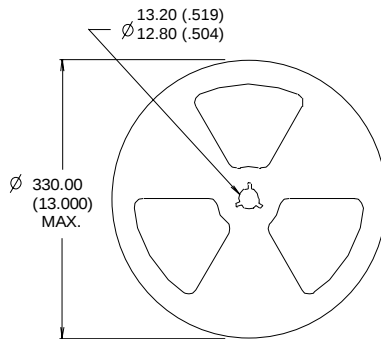

- NOTES :
1. OUTLINE COMFORMS TO EIA-418-1.
  2. CONTROLLING DIMENSION: MILLIMETER..
  - ③ DIMENSION MEASURED @ HUB.
  - ④ INCLUDES FLANGE DISTORTION @ OUTER EDGE.

