


International IOR Rectifier

MBRS120

SCHOTTKY RECTIFIER

1 Amp



Major Ratings and Characteristics


Characteristics	MBRS120	Units
$I_{F(AV)}$ Rectangular waveform	1.0	A
V_{RRM}	20	V
I_{FSM} @ $t_p = 5 \mu s$ sine	310	A
V_F @ $1.0 A_{pk}, T_J = 125^\circ C$	0.35	V
T_J range	- 65 to 150	$^\circ C$

Description/Features

The MBRS120 surface-mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC boards. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Small foot print, surface mountable
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Device Marking: IR12

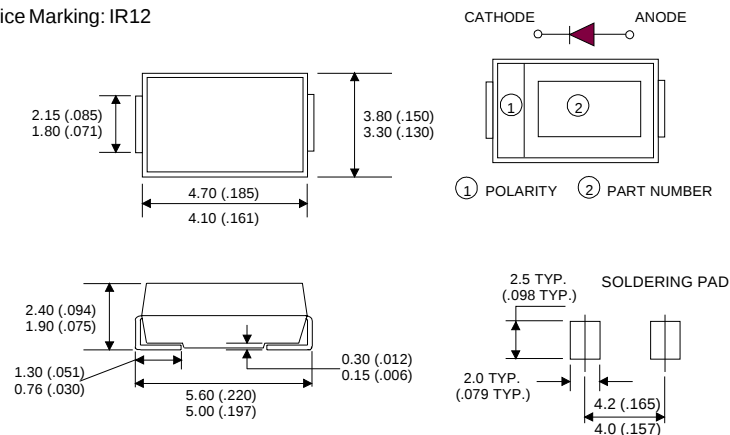

Outline SMB

Dimensions in millimeters and (inches)

For recommended footprint and soldering techniques refer to application note #AN-994

Voltage Ratings

Part number	MBRS120
V_R Max. DC Reverse Voltage (V)	20
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters		Value	Units	Conditions	
I _{F(AV)}	Max. Average Forward Current	1.0	A	50% duty cycle @ T _L = 138°C, rectangular wave form	
I _{FSM}	Max. Peak One Cycle Non-Repetitive	310		5μs Sine or 3μs Rect. pulse	Following any rated load condition and with rated V _{RRM} applied
	Surge Current	40		10ms Sine or 6ms Rect. pulse	
E _{AS}	Non Repetitive Avalanche Energy	2.0	mJ	T _J = 25°C, I _{AS} = 1A, L = 4mH	
I _{AR}	Repetitive Avalanche Current	0.8	A	Current decaying linearly to zero in 1 μsec Frequency limited by T _J max. Va = 1.5 x Vr typical	

Electrical Specifications

Parameters			Typ.	Max.	Units	Conditions	
V _{FM}	Max. Forward Voltage Drop	(1)	0.42	0.45	V	@ 1A	T _J = 25 °C
			0.46	0.52	V	@ 2A	
			0.33	0.37	V	@ 1A	T _J = 100 °C
			0.39	0.45	V	@ 2A	
			0.30	0.35	V	@ 1A	T _J = 125 °C
			0.36	0.43	V	@ 2A	
I _{RM}	Max. Reverse Leakage Current	(1)	0.015	0.2	mA	T _J = 25 °C	V _R = rated V _R
			2.0	6.0	mA	T _J = 100 °C	
			7.0	20	mA	T _J = 125 °C	
C _T	Typical Junction Capacitance		110	-	pF	V _R = 5V _{DC} (test signal range 100kHz to 1Mhz), @ 25°C	
L _S	Typical Series Inductance		2.0	-	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change		-	10000	V/ μs	(Rated V _R)	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Value	Units	Conditions
T_J Max. Junction Temperature Range (*)	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 150	$^\circ\text{C}$	
R_{thJL} Max. Thermal Resistance Junction to Lead (**)	30	$^\circ\text{C/W}$	DC operation
R_{thJA} Max. Thermal Resistance Junction to Ambient		80	$^\circ\text{C/W}$
Wt Approximate Weight	0.10(0.003)	gr (oz)	
Case Style	SMB		Similar DO-214AA
Device Marking	IR12		

(*) $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

(**) Mounted 1 inch square PCB

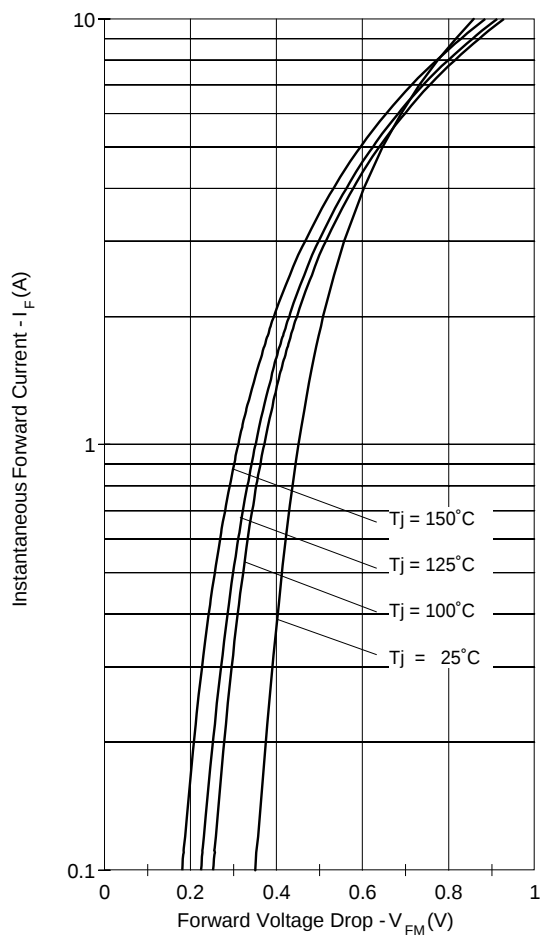


Fig. 1 - Maximum Forward Voltage Drop Characteristics

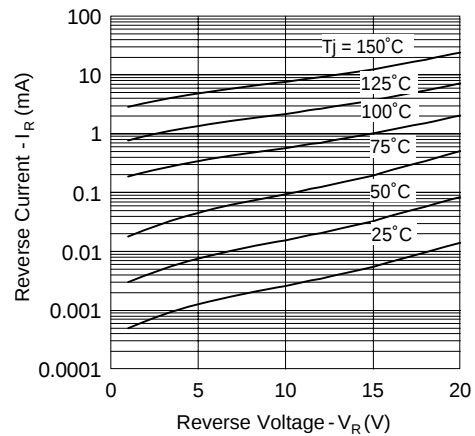


Fig. 2 - Typical Peak Reverse Current Vs. Reverse Voltage

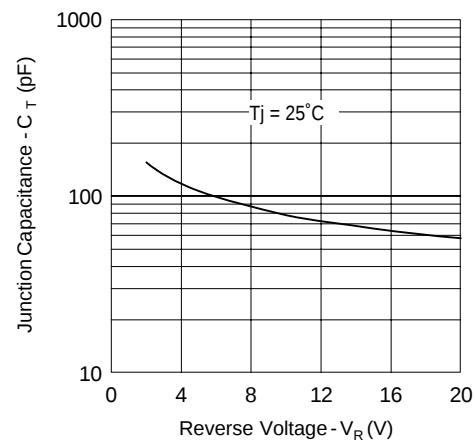


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

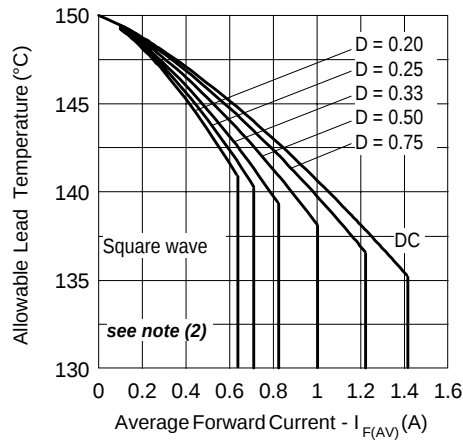


Fig. 4 - Maximum Average Forward Current Vs. Allowable Lead Temperature

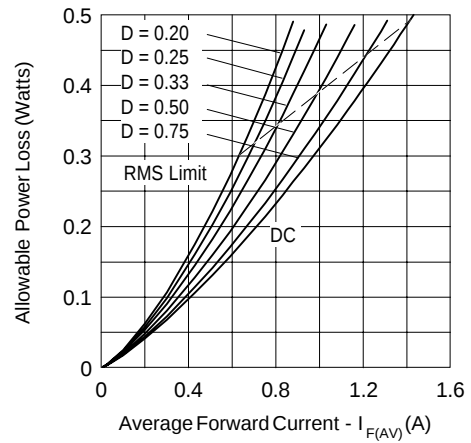


Fig. 5 - Maximum Average Forward Dissipation Vs. Average Forward Current

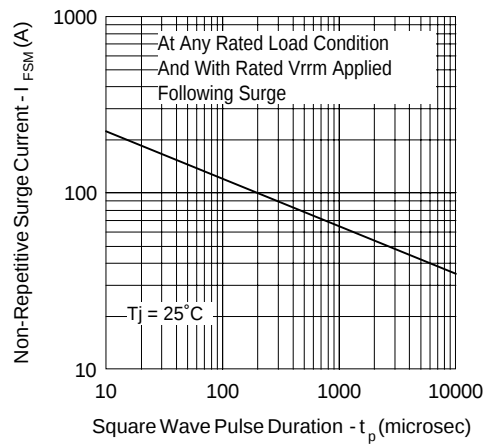



Fig. 6 - Maximum Peak Surge Forward Current Vs. Pulse Duration

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;

Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);


Pd_{REV} = Inverse Power Loss = $V_{RL} \times I_{LR} (1 - D)$

Tape & Reel Information

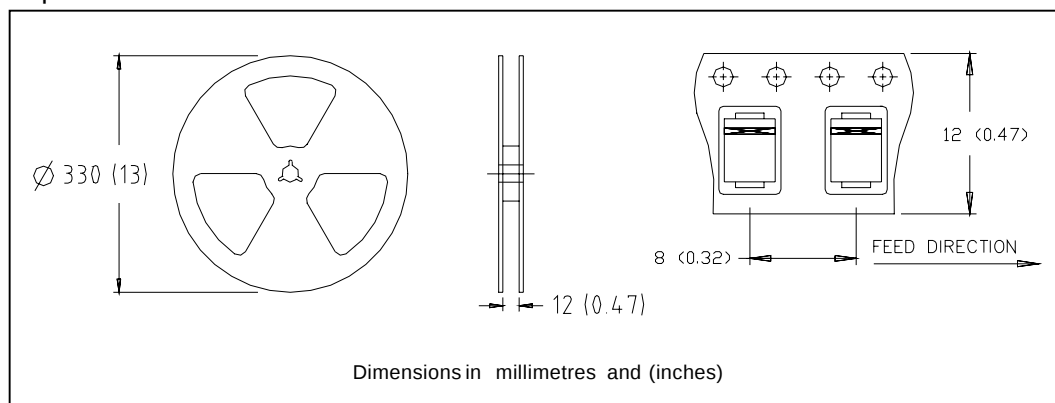

Marking & Identification

Each device has 2 rows for identification. The first row designates the device as manufactured by International Rectifier as indicated by the letters "IR", and the Part Number (indicates the current and the voltage rating). The second row indicates the year, the week of manufacturing and the Site ID.

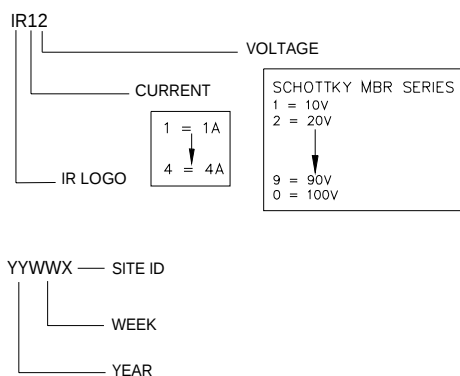

Ordering Information

MBRS120TR - TAPE AND REEL

WHEN ORDERING, INDICATE THE PART NUMBER AND THE QUANTITY (IN MULTIPLES OF 3000 PIECES).

EXAMPLE: MBRS120TR - 6000 PIECES

MBRS120

Bulletin PD-20644 rev. D 03/03

International
IOR Rectifier

Data and specifications subject to change without notice.
This product has been designed for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/03