



## LOW-VOLTAGE QUADRUPLE BUS SWITCH

**IDT74CBTLV3125**

### FEATURES:

- Pin-Out Compatible with Standard '125 Logic Products
- 5Ω A/B bi-directional switch
- Isolation Under Power-Off Conditions
- Over-voltage tolerant
- Latch-up performance exceeds 100mA
- $V_{CC} = 2.3V - 3.6V$ , normal range
- ESD > 2000V per MIL-STD-883, Method 3015;  
> 200V using machine model (C = 200pF, R = 0)
- Output Enable, Active Low
- Available in TSSOP and QSOP packages

### APPLICATIONS:


- 3.3V High Speed Bus Switching and Bus Isolation

### DESCRIPTION:


The CBTLV3125 features four independent switches. Each switch is enabled when the associated output-enable ( $\overline{OE}$ ) input is low.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

### FUNCTIONAL BLOCK DIAGRAM

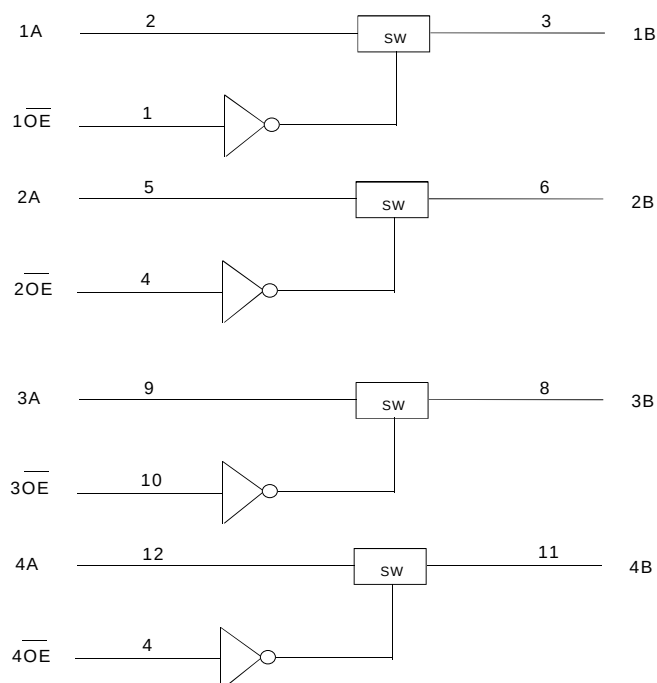

### SIMPLIFIED SCHEMATIC, EACH SWITCH

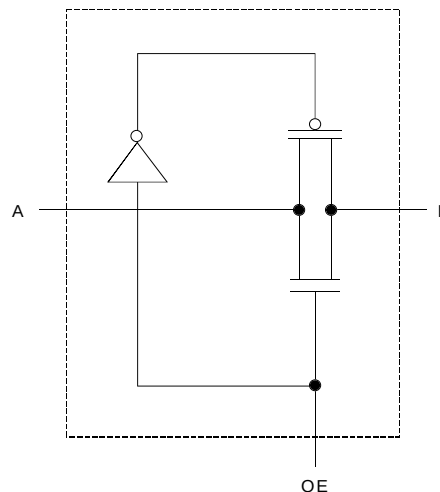

#### NOTE:


1. Pin numbers shown apply to the 14-pin TSSOP package.

The IDT logo is a registered trademark of Integrated Device Technology, Inc.


**INDUSTRIAL TEMPERATURE RANGE**

**MARCH 2001**

## PIN CONFIGURATION

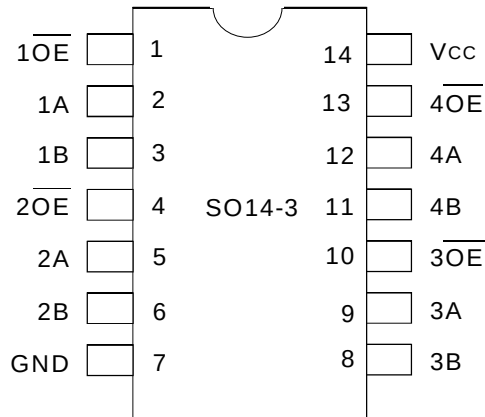

TSSOP  
TOP VIEW

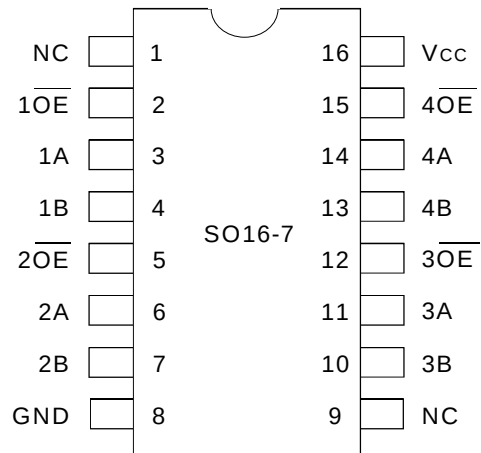

QSOP  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS (1)

| Symbol          | Description                       | Max.        | Unit |
|-----------------|-----------------------------------|-------------|------|
| Vcc             | Supply Voltage Range              | -0.5 to 4.6 | V    |
| Vi              | Input Voltage Range               | -0.5 to 4.6 | V    |
|                 | Continuous Channel Current        | 128         | mA   |
| I <sub>IK</sub> | Input Clamp Current, $V_{IO} < 0$ | -50         | mA   |
| TSTG            | Storage Temperature               | -65 to +150 | °C   |

### NOTE:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## FUNCTION TABLE (1)

| Input OE | Inputs/Outputs  |
|----------|-----------------|
| L        | A Port = B Port |
| H        | Disconnect      |

### NOTE:

- H = HIGH Voltage Level  
L = LOW Voltage Level

## OPERATING CHARACTERISTICS, $T_A = 25^\circ\text{C}$

| Symbol          | Parameter                        | Test Conditions    | Min. | Max. | Unit |
|-----------------|----------------------------------|--------------------|------|------|------|
| Vcc             | Supply Voltage                   |                    | 2.3  | 3.6  | V    |
| V <sub>IH</sub> | High-Level Control Input Voltage | Vcc = 2.3V to 2.7V | 1.7  | —    | V    |
|                 |                                  | Vcc = 2.7V to 3.6V | 2    | —    |      |
| V <sub>IL</sub> | Low-Level Control Input Voltage  | Vcc = 2.3V to 2.7V | —    | 0.7  | V    |
|                 |                                  | Vcc = 2.7V to 3.6V | —    | 0.8  |      |
| T <sub>A</sub>  | Operating Free-Air Temperature   |                    | -40  | 85   | °C   |

### NOTE:

- All unused control inputs of the device must be held at Vcc or GND to ensure proper operation of the device.

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

| Symbol                          | Parameter                                                      | Test Conditions                                                                     |                       | Min. | Typ. <sup>(1)</sup> | Max.  | Unit |
|---------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|------|---------------------|-------|------|
| V <sub>IK</sub>                 | Control Inputs, Data I/O                                       | V <sub>CC</sub> = 3V, I <sub>I</sub> = −18mA                                        |                       | —    | —                   | − 1.2 | V    |
| I <sub>I</sub>                  | Control Inputs, Data I/O                                       | V <sub>CC</sub> = 3.6V, V <sub>I</sub> = V <sub>CC</sub> or GND                     |                       | —    | —                   | ±1    | μA   |
| I <sub>OZ</sub>                 | Data I/O                                                       | V <sub>CC</sub> = 3.6V, V <sub>O</sub> = 0V or 3.6V switch disabled                 |                       | —    | —                   | 5     | μA   |
| I <sub>OFF</sub>                |                                                                | V <sub>CC</sub> = 0, V <sub>I</sub> or V <sub>O</sub> = 0 to 3.6V                   |                       | —    | —                   | 50    | μA   |
| I <sub>CC</sub>                 |                                                                | V <sub>CC</sub> = 3.6V, I <sub>O</sub> = 0, V <sub>I</sub> = V <sub>CC</sub> or GND |                       | —    | —                   | 10    | μA   |
| ΔI <sub>CC</sub> <sup>(2)</sup> | Control Inputs                                                 | V <sub>CC</sub> = 3.6V, One input at 3V, Other inputs at V <sub>CC</sub> or GND     |                       | —    | —                   | 300   | μA   |
| C <sub>I</sub>                  | Control Inputs                                                 | V <sub>I</sub> = 3V or 0                                                            |                       | —    | 4                   | —     | pF   |
| C <sub>IO</sub> (OFF)           |                                                                | V <sub>O</sub> = 3V or 0, $\overline{OE}$ = V <sub>CC</sub>                         |                       | —    | 6                   | —     | pF   |
| R <sub>ON</sub> <sup>(3)</sup>  | Max at V <sub>CC</sub> = 2.3V<br>Typ at V <sub>CC</sub> = 2.5V | V <sub>I</sub> = 0                                                                  | I <sub>O</sub> = 64mA | —    | 5                   | 8     | Ω    |
|                                 |                                                                |                                                                                     | I <sub>O</sub> = 24ma | —    | 5                   | 8     |      |
|                                 |                                                                | V <sub>I</sub> = 1.7V                                                               | I <sub>O</sub> = 15mA | —    | 27                  | 40    |      |
|                                 | V <sub>CC</sub> = 3V                                           | V <sub>I</sub> = 0                                                                  | I <sub>O</sub> = 64mA | —    | 5                   | 7     |      |
|                                 |                                                                |                                                                                     | I <sub>O</sub> = 24mA | —    | 5                   | 7     |      |
|                                 |                                                                | V <sub>I</sub> = 2.4V                                                               | I <sub>O</sub> = 15mA | —    | 10                  | 15    |      |

### NOTES:

1. Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
2. The increase in supply current is attributable to each input that is at the specified voltage level rather than  $V_{CC}$  or GND.
3. This is measured by the voltage drop between the A and B terminals at the indicated current through the switch.

## SWITCHING CHARACTERISTICS

| Symbol         | Parameter                                        | $V_{CC} = 2.5\text{V} \pm 0.2\text{V}$ |      | $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$ |      | Unit |
|----------------|--------------------------------------------------|----------------------------------------|------|----------------------------------------|------|------|
|                |                                                  | Min.                                   | Max. | Min.                                   | Max. |      |
| $t_{PD}^{(1)}$ | Propagation Delay<br>A to B or B to A            | —                                      | 0.15 | —                                      | 0.25 | ns   |
| $t_{EN}$       | Output Enable Time<br>$\overline{OE}$ to A or B  | 1                                      | 4.6  | 1                                      | 4.4  | ns   |
| $t_{DIS}$      | Output Disable Time<br>$\overline{OE}$ to A or B | 1                                      | 3.9  | 1                                      | 4.2  | ns   |

### NOTE:


1. The propagation time is the calculated RC time constant of the typical on-state resistance of the switch and the specified load capacitance when driven by an ideal voltage source (zero output impedance).

## TEST CIRCUITS AND WAVEFORMS


### TEST CONDITIONS

| Symbol     | $V_{CC}^{(1)} = 3.3V \pm 0.3V$ | $V_{CC}^{(2)} = 2.5V \pm 0.2V$ | Unit |
|------------|--------------------------------|--------------------------------|------|
| $V_{LOAD}$ | 6                              | $2 \times V_{CC}$              | V    |
| $V_{IH}$   | 3                              | $V_{CC}$                       | V    |
| $V_T$      | 1.5                            | $V_{CC}/2$                     | V    |
| $V_{LZ}$   | 300                            | 150                            | mV   |
| $V_{HZ}$   | 300                            | 150                            | mV   |
| $C_L$      | 50                             | 30                             | pF   |

### PROPAGATION DELAY

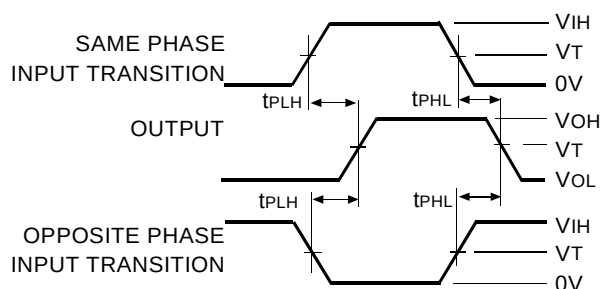

### TEST CIRCUITS FOR ALL OUTPUTS

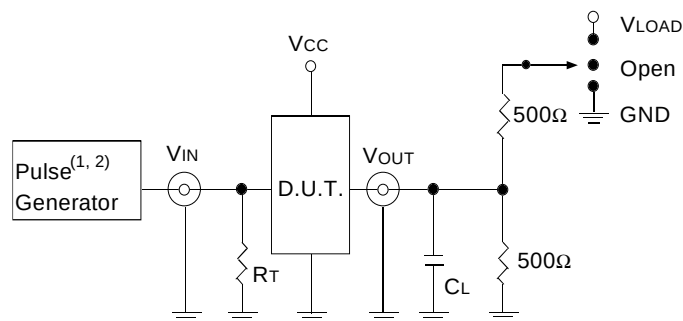


#### DEFINITIONS:

1.  $C_L$  = Load capacitance: includes jig and probe capacitance.
2.  $R_T$  = Termination resistance: should be equal to  $Z_{OUT}$  of the Pulse Generator.

#### NOTES:

1. Pulse Generator for all pulses: Rate  $\leq 10\text{MHz}$ ;  $t_F \leq 2.5\text{ns}$ ;  $t_R \leq 2.5\text{ns}$ .
2. Pulse Generator for all pulses: Rate  $\leq 10\text{MHz}$ ;  $t_F \leq 2\text{ns}$ ;  $t_R \leq 2\text{ns}$ .

### ENABLE AND DISABLE TIMES

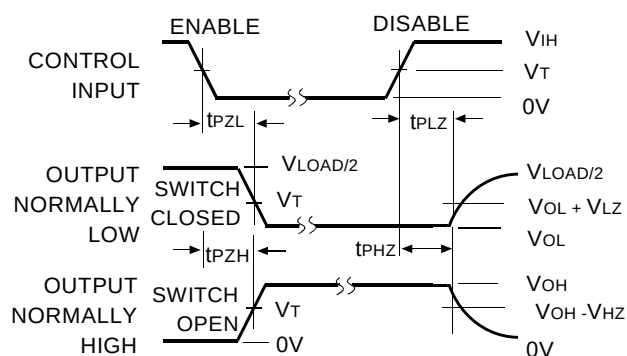

#### NOTE:

1. Diagram shown for input control Enable-LOW and input Control Disable-HIGH.

### SWITCH POSITION

| Test              | Switch     |
|-------------------|------------|
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |
| $t_{PD}$          | Open       |

## ORDERING INFORMATION

| IDT         | XX | CBTLV       | XXXX | X       |                                            |
|-------------|----|-------------|------|---------|--------------------------------------------|
| Temp. Range |    | Device Type |      | Package |                                            |
|             |    |             |      | PG      | Thin Shrink Small Outline Package (SO14-3) |
|             |    |             |      | Q       | Quarter Small Outline Package (SO16-7)     |
|             |    |             |      | 3125    | Low-Voltage Quadruple Bus Switch           |
|             |    |             |      | 74      | -40°C to +85°C                             |



**CORPORATE HEADQUARTERS**  
2975 Stender Way  
Santa Clara, CA 95054

**for SALES:**  
800-345-7015 or 408-727-6116  
fax: 408-492-8674  
[www.idt.com](http://www.idt.com)

**for Tech Support:**  
[logichelp@idt.com](mailto:logichelp@idt.com)  
(408) 654-6459