




**SURFACE MOUNT DIODE**

**Absolute Maximum Ratings (Ta=25°C)**

Items	Symbol	Ratings	Unit
Reverse Voltage	VRRM	75	V
Reverse Recovery Time	trr	4	ns
Forward Voltage @ If = 50 mA	VF	1.0	V
Forward Current	IF	215	mA
Junction Temp.	Tj	-55 to 150	°C
Storage Temp.	Tstg	-55 to 150	°C

**Mechanical Data**

Items	Materials
Package	SOT-23
Lead Frame	42 Alloy
Lead Finish	Solder Plating
Bond Wire	Au
Mold Resin	Epoxy
Chip	Silicon

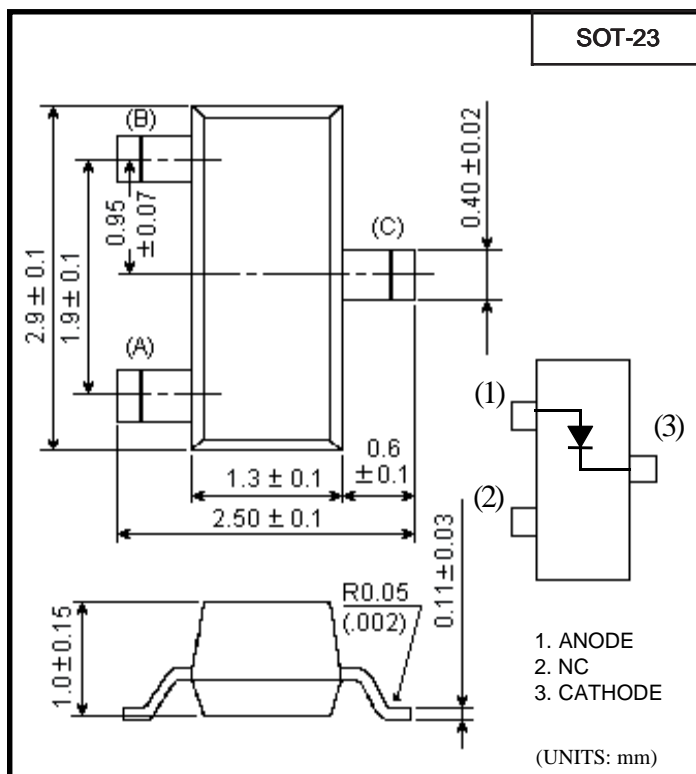

**Electrical Characteristics (Ta=25°C)**

Ratings	Symbol	Ratings	Unit
Repetitive Peak Reverse Voltage	VRRM	85	V
Repetitive Peak Forward Current	IFRM	500	mA
Forward Voltage	VF		
IF= 1mA		715	mV
IF= 10mA		855	
IF= 50mA		1000	
IF= 100mA		1250	
Reverse Current	IR		
VR= 75V		1.0	uA
VR= 25V (Tj= 150°C)		30	
VR= 75V (Tj= 150°C)		50	
Junction Capacitance VR = 0 V, f = 1MHz	Cj	2.0	pF
Reverse Recovery Time IF= IR= 10mA; RL= 100 Ω	trr	4	ns
Recovery Charge IF= 10mA, VR= 5V, RL= 100 Ω	Qs	45	pC