


SB620CT~SB660CT

VOLTAGE 20 to 60 Volts **CURRENT** - 6 Ampere

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling , and polarity protection applications.

Weight: 0.08 ounces, 2.24grams.

Unit: inch (mm)

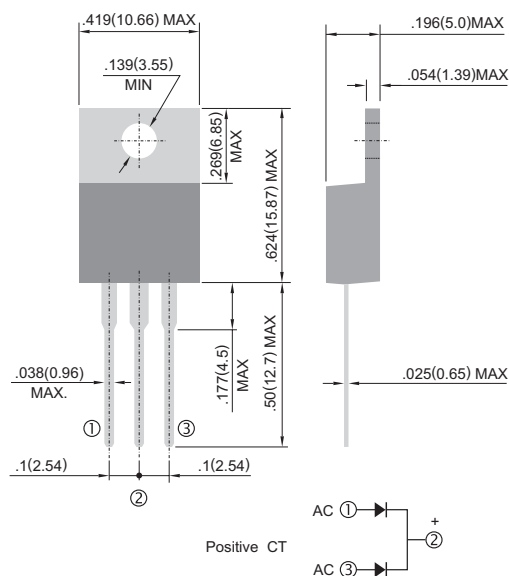

For capacitive load, derate current by 20%

	SB620CT	SB630CT	SB640CT	SB650CT	SB660CT	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	V
Maximum RMS Voltage	14	21	28	35	42	V
Maximum DC Blocking Voltage	20	30	40	50	60	V
Maximum Average Forward Rectified Current at Tc=75°C	6.0					A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	75					A
Maximum Forward Voltage at 3.0A per element	0.55		0.70			V
Maximum DC Reverse Current at Tc=25°C			0.1			mA
DC Blocking Voltage per element Tc=100°C			15			
Typical Thermal Resistance Note RθJC			6.0			°C/W
RθJA			80			
Operating and Storage Temperature Range	-50 to +125					°C
Storage Temperature Range	-50 to +150					°C

1. Thermal Resistance Junction to Ambient .

RATING AND CHARACTERISTIC CURVES

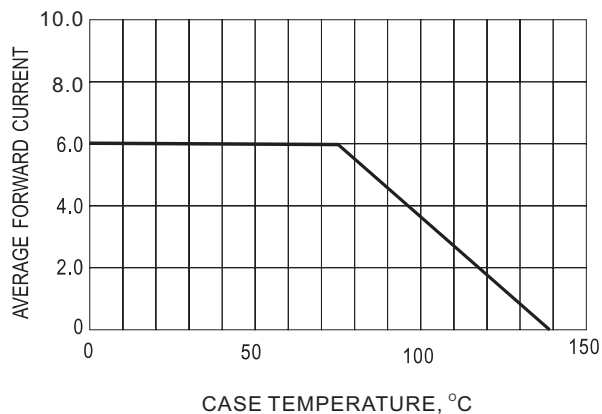


Fig.1- FORWARD CURRENT DERATING CURVE

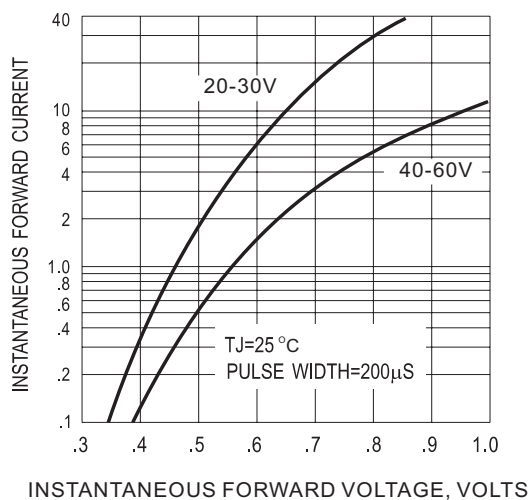


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

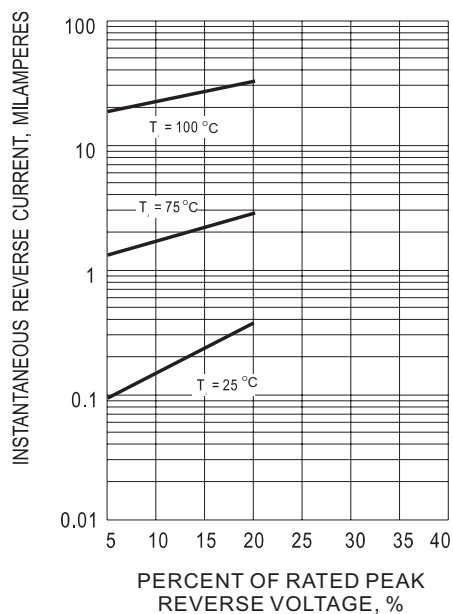


Fig.3- TYPICAL REVERSE CHARACTERISTIC

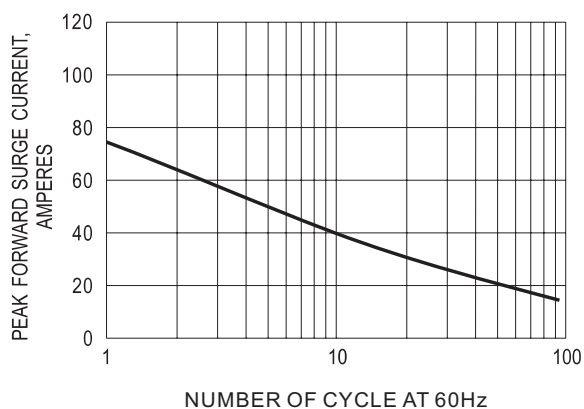


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT

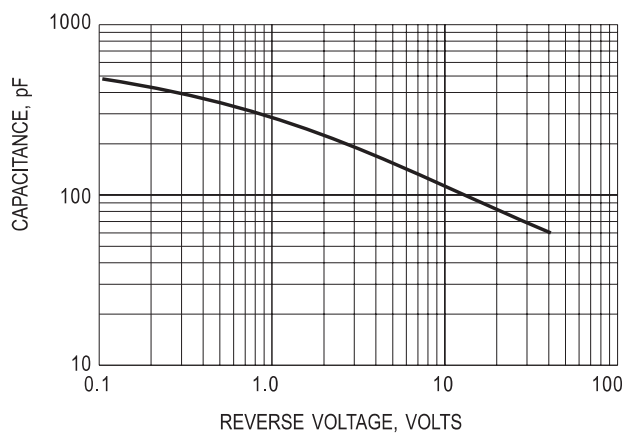


Fig.5- TYPICAL JUNCTION CAPACITANCE