



# 6A05G THRU 6A100G

## 6.0 AMPS. Glass Passivated Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
6.0 Amperes


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 250°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 1.65 grams

### R-6



**Dimensions in inches and (millimeters)**

### Maximum Ratings and Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	6A05G	6A10G	6A20G	6A40G	6A60G	6A80G	6A100G	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @ T <sub>A</sub> = 50°C	6.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	250							A
Maximum Instantaneous Forward Voltage @6.0A	1.1		1.0				V	
Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =125°C	10 100							uA uA
Typical Junction Capacitance ( Note )	100							pF
Operating and Storage Temperature Range T <sub>J</sub> , T <sub>STG</sub>	- 65 to + 150							°C


Note: Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

## RATINGS AND CHARACTERISTIC CURVES (6A05G THRU 6A100G)


**FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE**

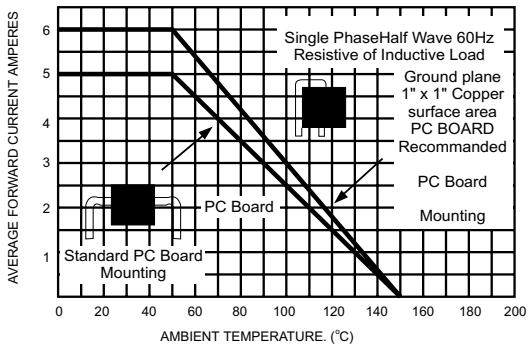

**FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

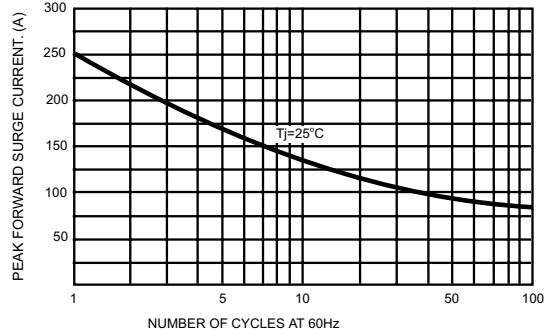

**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

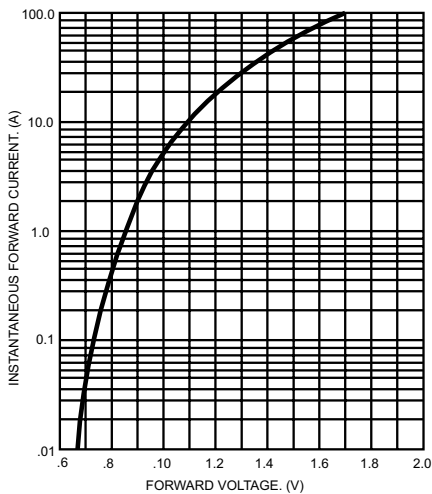

**FIG.4- TYPICAL JUNCTION CAPACITANCE**

