



MBR2535CT THRU MBR2560CT

25.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
35 to 60 Volts
Current
25.0 Amperes


Features

- ✦ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ✦ Metal silicon junction, majority carrier conduction
- ✦ Low power loss, high efficiency
- ✦ High current capability, low forward voltage drop
- ✦ High surge capability
- ✦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ✦ Guardring for overvoltage protection
- ✦ High temperature soldering guaranteed:
260°C/10 seconds, 0.25" (6.35mm) from case

Mechanical Data

- ✦ Cases: JEDEC TO-220 molded plastic
- ✦ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ✦ Polarity: As marked
- ✦ Mounting position: Any
- ✦ Mounting torque: 5 in. - lbs. max
- ✦ Weight: 0.08 ounce, 2.24 grams

TO-220

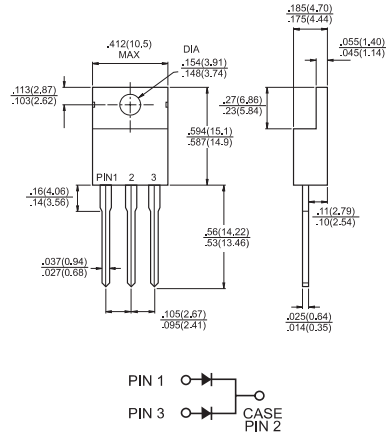

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MBR 2535CT	MBR 2545CT	MBR 2550CT	MBR 2560CT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	V
Maximum RMS Voltage	V_{RMS}	24	31	35	42	V
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	V
Maximum Average Forward Rectified Current at $T_C=130^\circ\text{C}$	$I_{(AV)}$	25				A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_C=130^\circ\text{C}$	I_{FRM}	25				A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200				A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1.0		0.5		A
Maximum Instantaneous Forward Voltage at (Note 2) $I_F=12.5\text{A}, T_C=25^\circ\text{C}$ $I_F=12.5\text{A}, T_C=125^\circ\text{C}$ $I_F=25\text{A}, T_C=25^\circ\text{C}$ $I_F=25\text{A}, T_C=125^\circ\text{C}$	V_F	-		0.75 0.65 -		V
Maximum Instantaneous Reverse Current @ $T_C=25^\circ\text{C}$ at Rated DC Blocking Voltage Per Leg @ $T_C=125^\circ\text{C}$ (Note 2)	I_R	0.2 40.0		1.0 50		mA mA
Voltage Rate of Change, (Rated V_R)	dV/dt	1,000				V/ μs
Maximum Thermal Resistance Per Leg (Note 3)	$R_{\theta_{JC}}$	1.0				$^\circ\text{C}/\text{W}$
Typical Junction Capacitance	C_j	600		460		pF
Operating Junction Temperature Range	T_J	-65 to +150				$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +175				$^\circ\text{C}$

Notes: 1. 2.0us Pulse Width, f=1.0 KHz

2. Pulse Test: 300us Pulse Width, 1% Duty Cycle

3. Thermal Resistance from Junction to Case Per Leg, with Heatsink size (4"x6"x0.25") Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (MBR2535CT THRU MBR2560CT)

FIG.1- FORWARD CURRENT DERATING CURVE

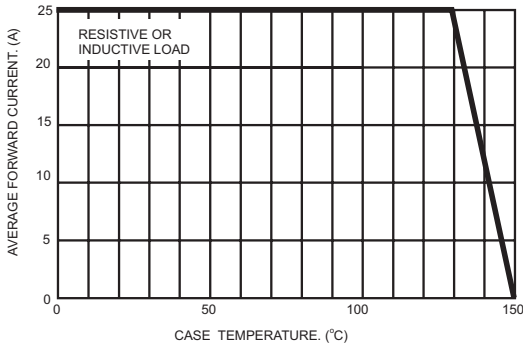


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

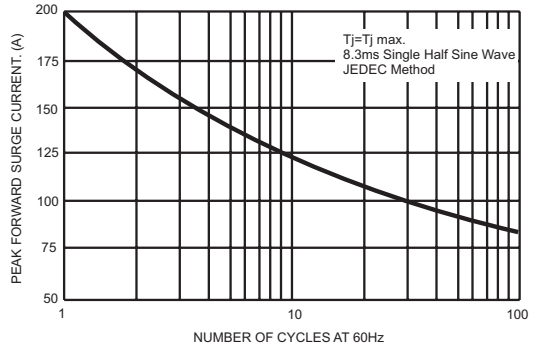


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

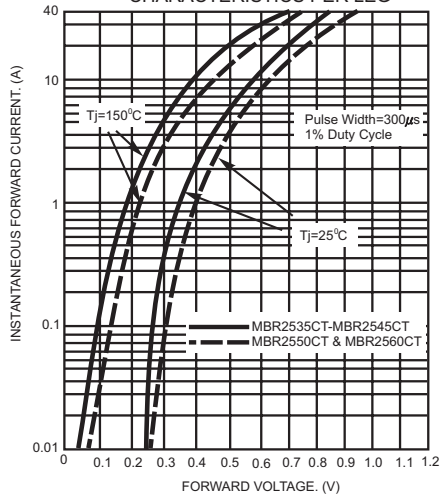


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

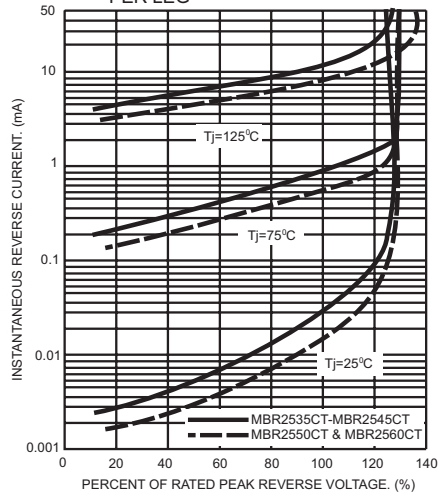


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

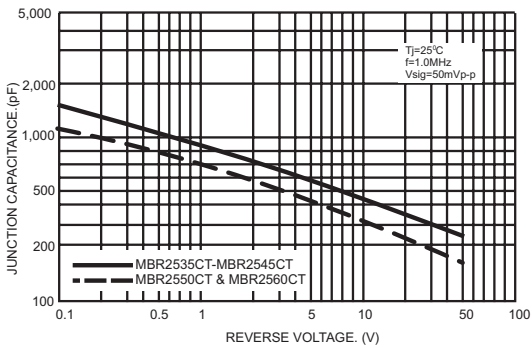


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

