




1N5817 THRU 1N5819

1 AMPERE SCHOTTKY BARRIER RECTIFIER
VOLTAGE - 20 to 40 Volts CURRENT - 1.0 Ampere

FEATURES

Plastic package has Underwriters Laboratory
Flammability Classification 94V-O Utilizing
Flame Retardant Epoxy Molding Compound
1.0 ampere operation at $T_L=90^\circ\text{C}$ with no thermal runaway
Exceeds environmental standards of MIL-S-19500/228
For use in low voltage, high frequency inverters free wheeling, and
polarity protection applications

DO-41

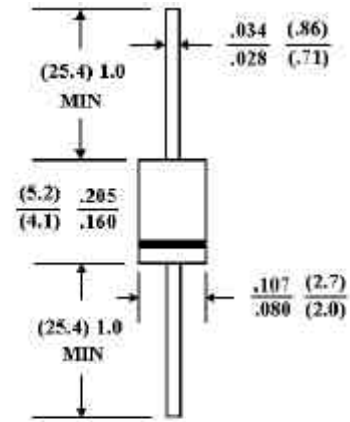

MECHANICAL DATA

Case: Molded plastic, JEDEC DO-41

Terminals: Axial leads, solderable per MIL-STD-202,
Method 208

Polarity: Color Band denotes cathode

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

	1N5817	1N5818	1N5819	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	V
Maximum RMS Voltage	14	21	28	V
Maximum DC Blocking Voltage	20	30	40	V
Maximum Average Forward Rectified Current $3/8"$ Lead Length $T_L=90^\circ\text{C}$	1.0			A
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load (JEDEC method) $T_L=70^\circ\text{C}$	25			A
Maximum Forward Voltage at 1.0A DC	.45	.55	.60	V
Maximum Forward Voltage at 3.0A DC	.75	.875	.90	V
Maximum Average DC Reverse Current $T_A=25^\circ\text{C}$ at Rated Reverse Voltage $T_A=100^\circ\text{C}$	0.5 10			mA mA
Typical Junction capacitance (Note 1)	110			pF
Typical Thermal Resistance (Note 2)	80			$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	-50 to +125			$^\circ\text{C}$

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Thermal Resistance Junction to Ambient

RATING AND CHARACTERISTIC CURVES

1N5817 THRU 1N5819

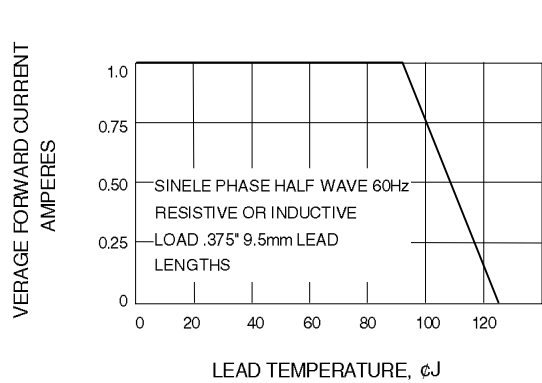


Fig. 1-FORWARD CURRENT DERATING CURVE

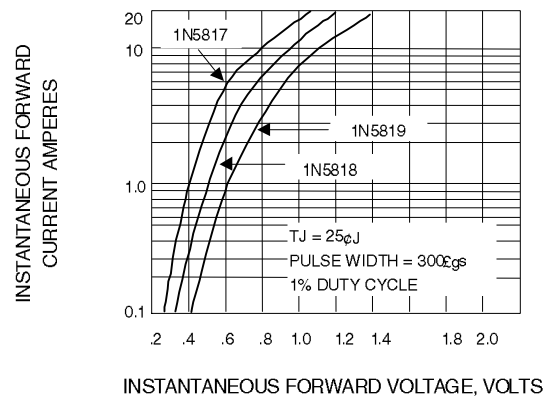


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

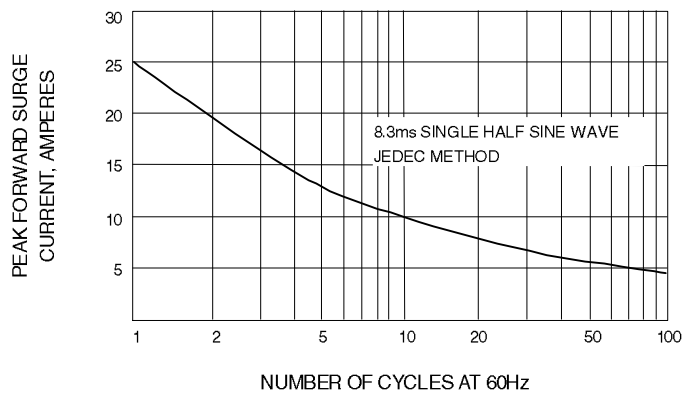


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

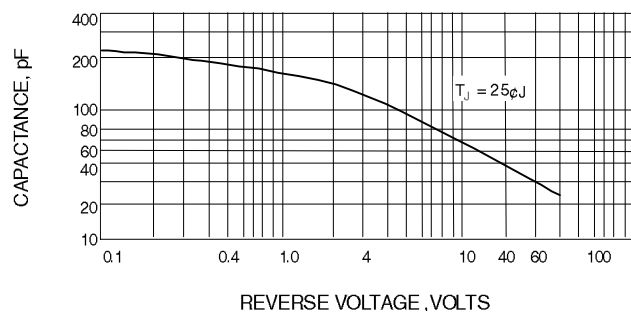


Fig. 4-TYPICAL JUNCTION CAPACITANCE