


Features

Fast Switching Speed
Surface Mount Package Ideally Suited for Automatic Insertion
For General Purpose Switching Applications
High Conductance

Mechanical Data

Case: SOT-323, Molded Plastic
Terminals: Solderable per MIL-STD-202, Method 208
Terminal Connections: See Diagram
Weight: 0.006 grams (approx.)

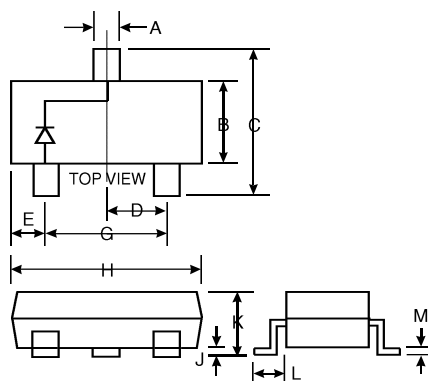

SOT-323		
Dim	Min	Max
A	0.30	0.40
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
E	0.30	0.40
G	1.20	1.40
H	1.80	2.20
J	0.0	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
All Dimensions in mm		

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	BAS19W	BAS20W	BAS21W	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	120	200	250	V
Working Peak Reverse Voltage DC Blocking Voltage	V_{RWM} V_R	100	150	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	71	106	141	V
Forward Continuous Current (Note 1)	I_{FM}	400			mA
Average Rectified Output Current (Note 1)	I_O	200			mA
Non-Repetitive Peak Forward Surge Current @ $t = 1.0\text{ s}$ @ $t = 1.0\text{ s}$	I_{FSM}	2.5 0.5			A
Repetitive Peak Forward Surge Current	I_{FRM}	625			mA
Power Dissipation	P_d	200			mW
Thermal Resistance Junction to Ambient Air (Note 1)	R_{JA}	625			K/W
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150			C

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Maximum Forward Voltage	V_{FM}		1.0 1.25	V	$I_F = 100\text{mA}$ $I_F = 200\text{mA}$
Maximum Peak Reverse Current @ Rated DC Blocking Voltage	I_{RM}		100 15	nA A	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$
Junction Capacitance	C_j		5.0	pF	$V_R = 0, f = 1.0\text{MHz}$
Reverse Recovery Time	t_{rr}		50	ns	$I_F = I_R = 30\text{mA}$, $I_{rr} = 0.1 \times I_R, R_L = 100$

Note: 1. Valid provided that terminals are kept at ambient temperature.

