



SB1020F THRU SB10100F

ISOLATION SCHOTTKY BARRIER RECTIFIERS
VOLTAGE - 20 to 100 Volts CURRENT - 10.0 Amperes


ITO-220AC

FEATURES

Plastic package has Underwriters Laboratory
Flammability Classification 94V-0 utilizing
Flame Retardant Epoxy Molding Compound
Exceeds environmental standards of MIL-S-19500/228
Low power loss, high efficiency
Low forward voltage, high current capability
High surge capacity
For use in low voltage, high frequency inverters,
free wheeling, and polarity protection applications

MECHANICAL DATA

Case: ITO-220AC full molded plastic package
Terminals: Leads, solderable per MIL-STD-202, Method 208
Polarity: As marked
Mounting Position: Any
Weight: 0.08 ounce, 2.24 grams

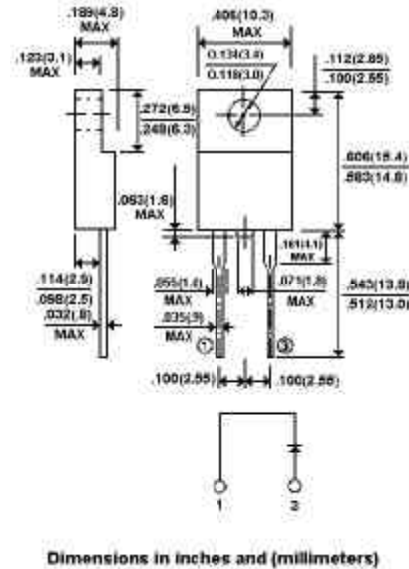

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SB1020F	SB1030F	SB1040F	SB1050F	SB1060F	SB1080F	SB10100F	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	26	35	42	56	80	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current at T _C =100 ºJ	10.0							A
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load(JEDEC method)	150							A
Maximum Forward Voltage at 10.0A per element	0.55		0.75		0.85			V
Maximum DC Reverse Current at Rated T _C =25 ºJ	0.5							mA
DC Blocking Voltage per element T _C =100 ºJ	50							
Typical Thermal Resistance Note R £KJA	60							ºJ/W
Operating and Storage Temperature Range T _J	-50 TO +150							ºJ

NOTES:

Thermal Resistance Junction to Ambient

RATING AND CHARACTERISTIC CURVES
SB1020F THRU SB10100F

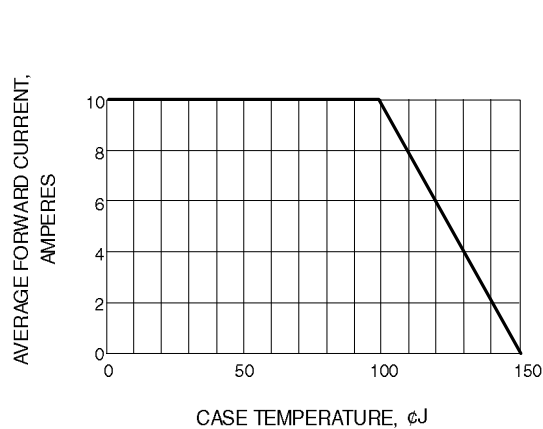


Fig. 1-FORWARD CURRENT DERATING CURVE

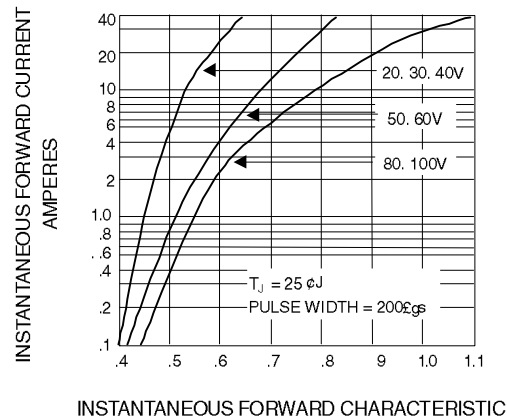


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

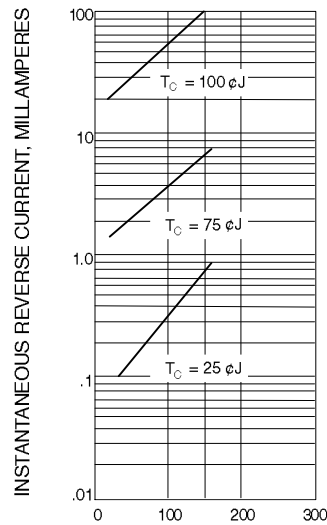


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

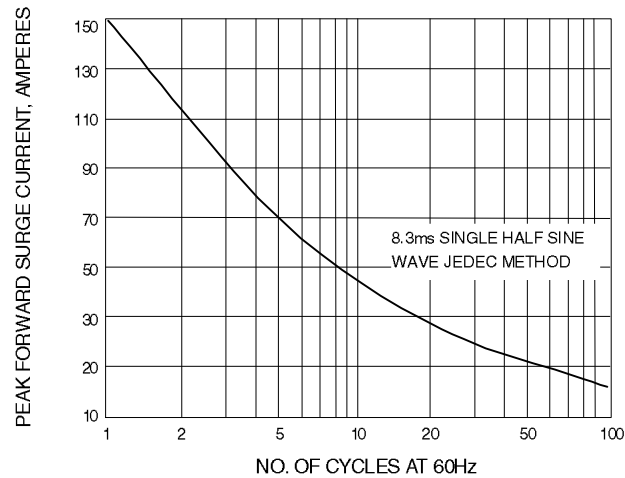


Fig. 4-MAXIMUM NON-REPETITIVE SURGE CURRENT

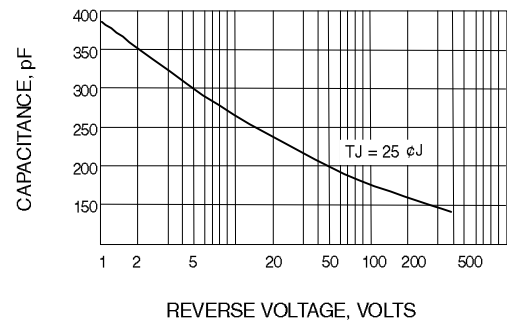


Fig. 5-TYPICAL JUNCTION CAPACITANCE