




SB120 THRU SB1100

1 AMPERE SCHOTTKY BARRIER RECTIFIERS
 VOLTAGE - 20 to 100 Volts CURRENT - 1.0 Ampere

DO-41

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- 1 ampere operation at $T_A=75^\circ\text{C}$ with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications

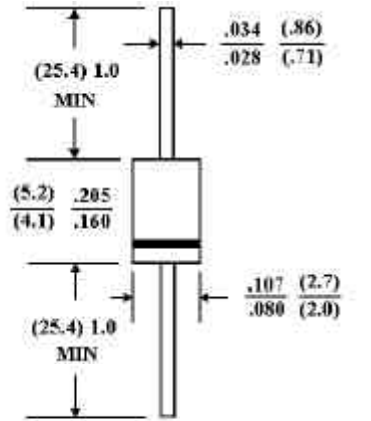

MECHANICAL DATA

- Case: Molded plastic, DO-41
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Mounting Position: Any
- Weight: 0.012 ounce, 0.34 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

	SB120	SB130	SB140	SB150	SB160	SB180	SB1100	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	26	35	42	56	80	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Forward Voltage at 1.0A	0.50		0.70		0.85			V
Maximum Average Forward Rectified Current .375" Lead Length at $T_A=75^\circ\text{C}$	1.0							A
Peak Forward Surge Current I_{FM} (surge) 8.3msec. single half sine-wave superimposed on rated load (JEDEC method)	30							A
Maximum Full Load Reverse Current, Full Cycle Average at $T_A=75^\circ\text{C}$	30							mA
Maximum Reverse Current $T_A=25^\circ\text{C}$ at Rated Reverse Voltage $T_A=100^\circ\text{C}$	0.5 10.0							mA
Typical Junction capacitance (Note 1)	110							pF
Typical Thermal Resistance θ_{KJA} (Note 2)	80							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	-50 TO +125							$^\circ\text{C}$

NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC
- Thermal Resistance Junction to Ambient

RATING AND CHARACTERISTIC CURVES
 SB120 THRU SB1100

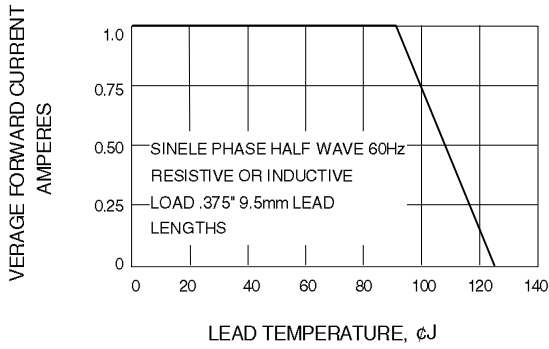


Fig. 1-FORWARD CURRENT DERATING CURVEE

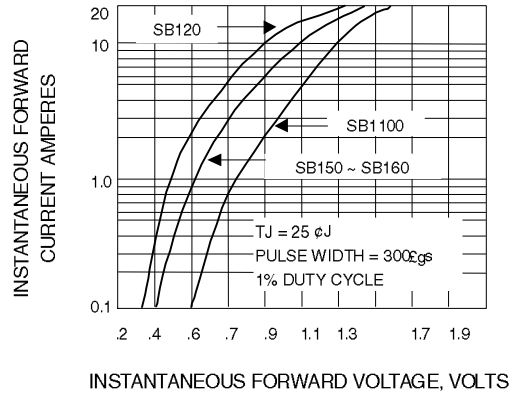


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

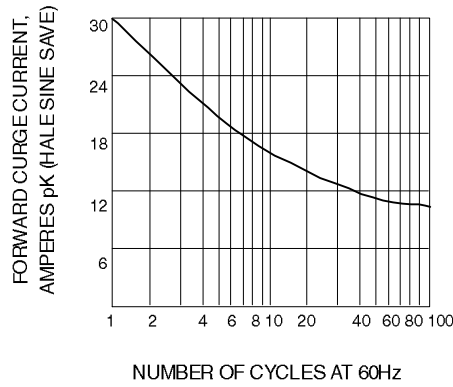


Fig. 3-MAXIMUM NON-REPETITIVE SURGE CURRENT

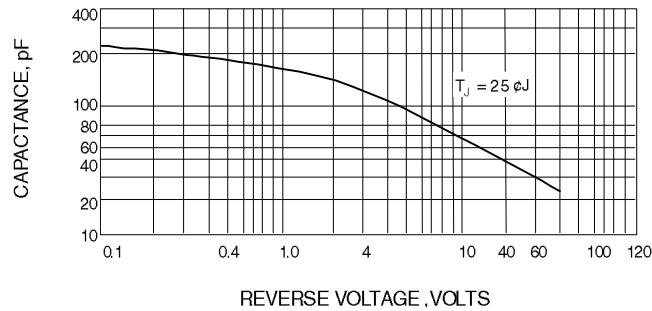


Fig. 4-TYPICAL JUNCTION CAPACITANCE