




SB520 THRU SB5100

HIGH CURRENT SCHOTTKY BARRIER RECTIFIERS
VOLTAGE - 20 to 100 Volts CURRENT - 5.0 Amperes

FEATURES

- Low cost
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing
- Metal to silicon rectifier, Majority carrier conduction
- Low power loss, high efficiency
- High current capability, Low V_F
- High surge capacity
- Epitaxial construction
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250 $^{\circ}$ C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension

DO-201AD

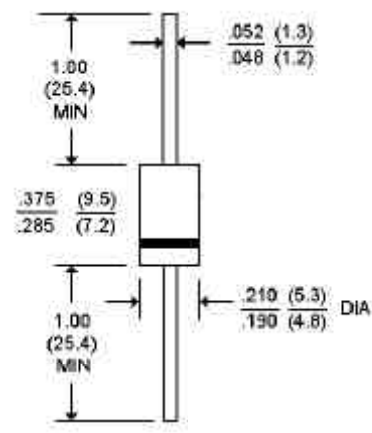

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: Molded plastic, DO-201AD
Terminals: Axial leads, solderable per MIL-STD-202, Method 208
Polarity: Color band denotes cathode
Mounting Position: Any
Weight: 0.04 ounce, 1.12 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Resistive or inductive load.

For capacitive load, derate current by 20%.

	SB520	SB530	SB540	SB550	SB560	SB580	SB5100	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	V
Maximum RMS Voltage	14	21	28	35	42	56	80	V
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current, .375"(9.5mm) Lead Length(Fig. 1)	5.0							A
Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load(JEDEC method)	150							A
Maximum Instantaneous Forward Voltage at 5.0A	0.55			0.70		0.85		V
Maximum DC Reverse Current T _A =25 ºC	0.5							mA
Reverse Voltage T _A =100 ºC	50.0							
Typical Thermal Resistance (Note 1) R _{θKJL}	15				10			ºC/W
Typical Junction capacitance (Note 2)	500				380			pF
Operating and Storage Temperature Range T _J , T _{STG}	-50 TO +125							ºC

NOTES:

- Thermal Resistance Junction to Lead Vertical PC Board Mounting .375(9.5mm) Lead Lengths
- Measured at 1 MHz and applied reverse voltage of 4.0 Volts

RATING AND CHARACTERISTIC CURVES
SB520 THRU SB5100

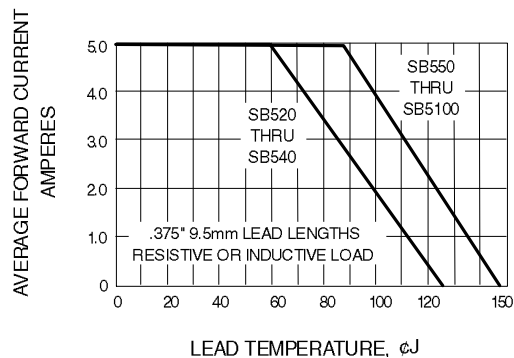


Fig. 1-FORWARD CURRENT DERATING CURVE

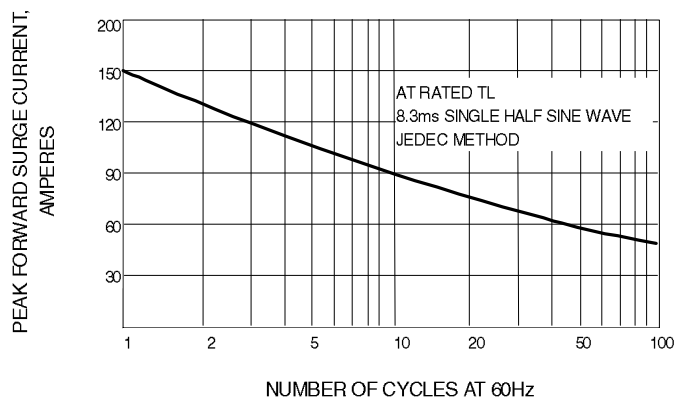


Fig. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

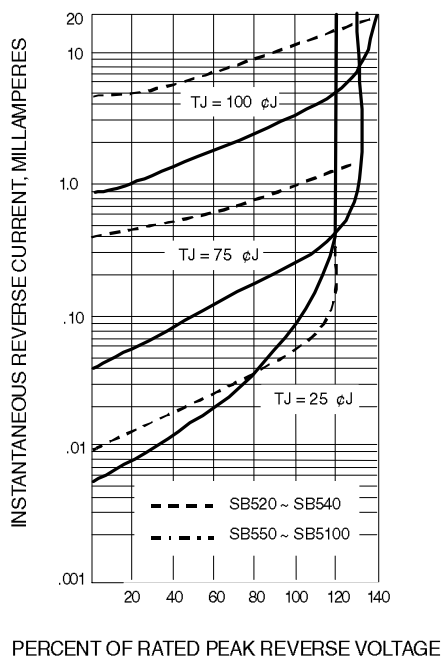


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

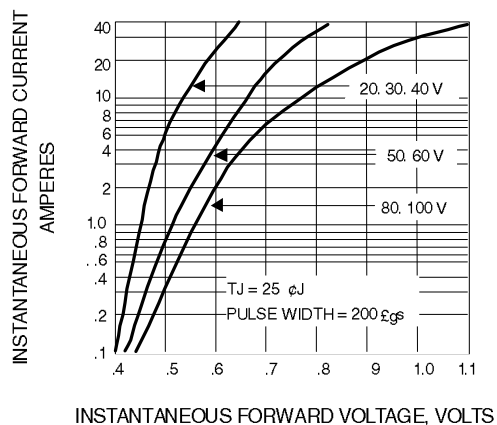


Fig. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

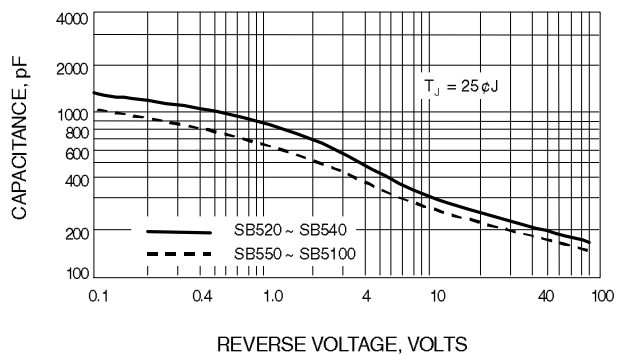


Fig. 5-TYPICAL JUNCTION CAPACITANCE