


## QUAD CLOCKED D LATCH

- CLOCK POLARITY CONTROL
- Q AND  $\bar{Q}$  OUTPUTS
- COMMON CLOCK
- LOW POWER TTL COMPATIBLE
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- QUIESCENT CURRENT SPECIFIED UP TO 20V
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT LEAKAGE CURRENT  
 $I_l = 100\text{nA (MAX) AT } V_{DD} = 18\text{V } T_A = 25^\circ\text{C}$
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC JESD13B "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B SERIES CMOS DEVICES"

### DESCRIPTION

The HCF4042B is a monolithic integrated circuit fabricated in Metal Oxide Semiconductor technology available in DIP and SOP packages.

The HCF4042B types contains four latch circuit, each strobes by a common clock. Complementary buffered outputs are available from each circuit. The impedance of the n and p channel output devices is balanced and all outputs are electrically identical.

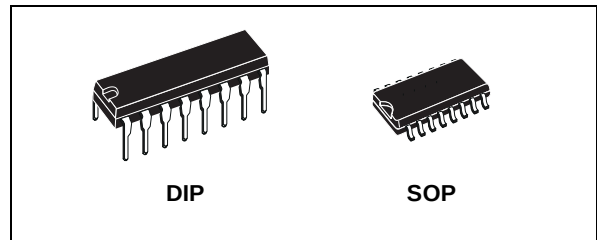


### ORDER CODES


| PACKAGE | TUBE       | T & R         |
|---------|------------|---------------|
| DIP     | HCF4042BEY |               |
| SOP     | HCF4042BM1 | HCF4042M013TR |

Information present at the data input is transferred to outputs Q and  $\bar{Q}$  during the CLOCK level which is programmed by the POLARITY input. For POLARITY = 0 the transfer occurs during the 0 CLOCK level and for POLARITY = 1 the transfer occurs during the 1 CLOCK level. The outputs follow the data input providing the CLOCK and POLARITY levels defined above are present. When a CLOCK transition occurs (positive for POLARITY = 0 and negative for POLARITY = 1) the information present at the input during the CLOCK transition is retained at the outputs until an opposite CLOCK transition occurs.

### PIN CONNECTION

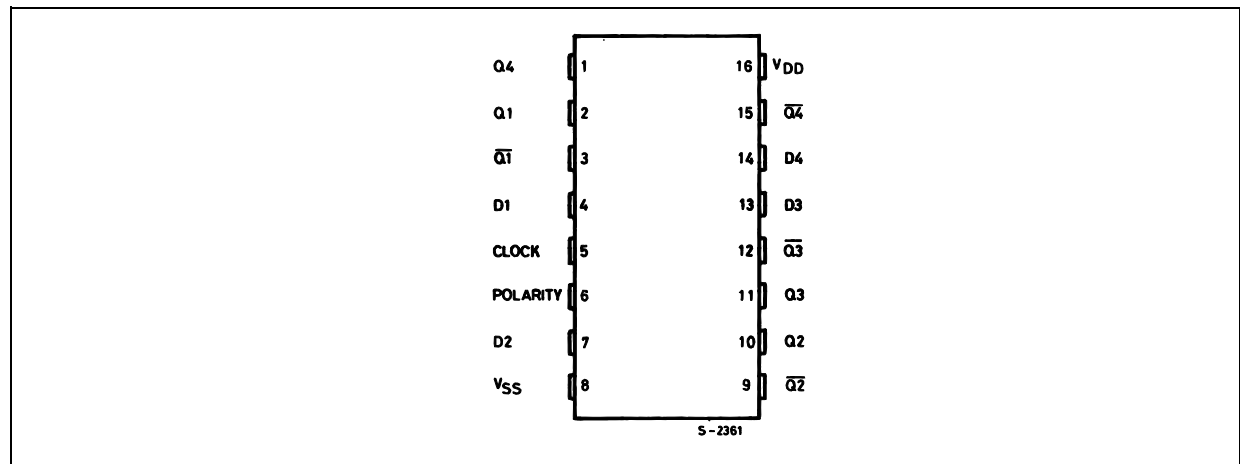


INPUT EQUIVALENT CIRCUIT

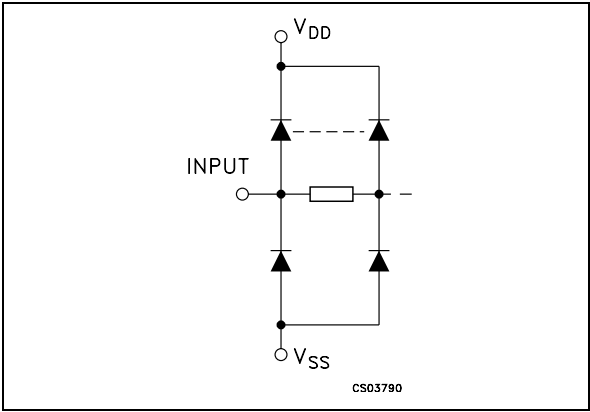

PIN DESCRIPTION

| PIN No       | SYMBOL   | NAME AND FUNCTION       |
|--------------|----------|-------------------------|
| 4, 7, 13, 14 | D1 to D4 | Data Inputs             |
| 2, 10, 11, 1 | Q1 to Q4 | Q outputs               |
| 3, 9, 12, 15 | Q1 to Q4 | Q outputs               |
| 5            | CLOCK    | Clock Input             |
| 6            | POLARITY | Polarity inputs         |
| 8            | VSS      | Negative Supply Voltage |
| 16           | VDD      | Positive Supply Voltage |


FUNCTIONAL DIAGRAM

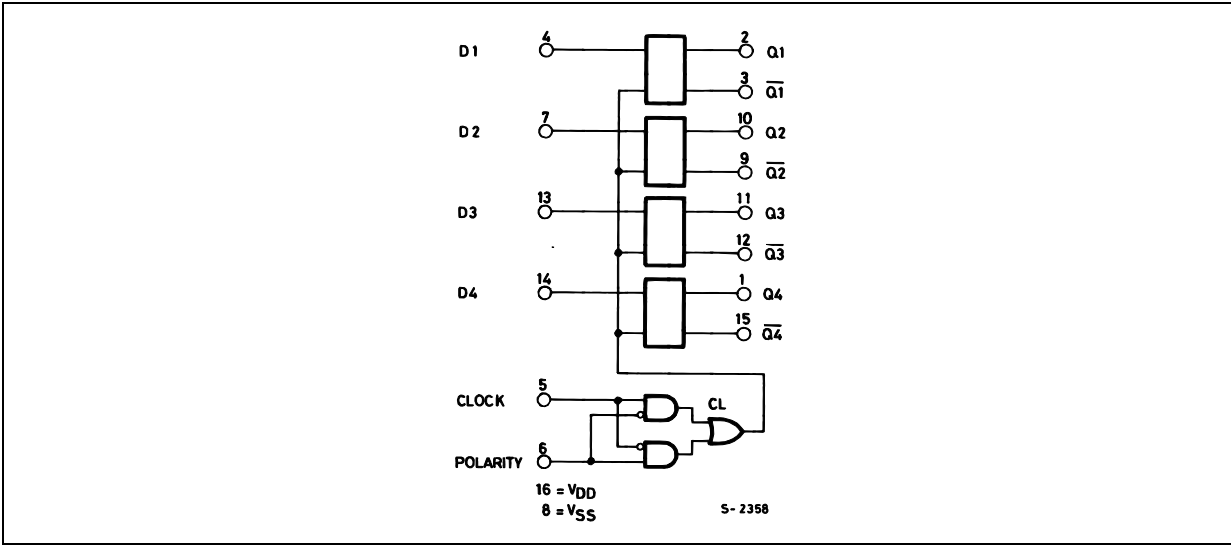

TRUTH TABLE

| CLOCK | POLARITY | Q     |
|-------|----------|-------|
| L     | 0        | D     |
|       | 0        | LATCH |
| H     | 1        | D     |
|       | 1        | LATCH |

## LOGIC BLOCK DIAGRAM

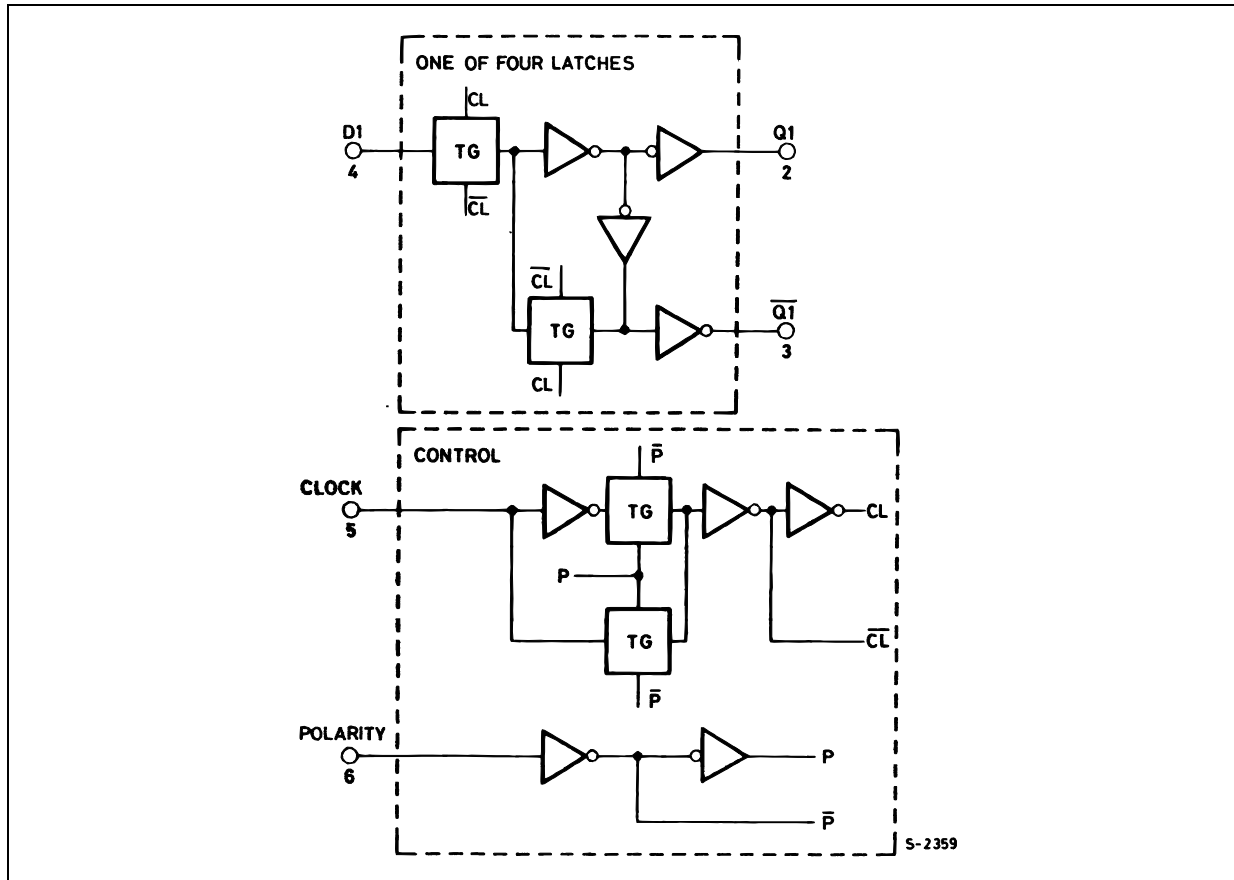

This logic diagram has not be used to estimate propagation delays

## ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter                               | Value                  | Unit |
|-----------|-----------------------------------------|------------------------|------|
| $V_{DD}$  | Supply Voltage                          | -0.5 to +22            | V    |
| $V_I$     | DC Input Voltage                        | -0.5 to $V_{DD} + 0.5$ | V    |
| $I_I$     | DC Input Current                        | $\pm 10$               | mA   |
| $P_D$     | Power Dissipation per Package           | 200                    | mW   |
|           | Power Dissipation per Output Transistor | 100                    | mW   |
| $T_{op}$  | Operating Temperature                   | -55 to +125            | °C   |
| $T_{stg}$ | Storage Temperature                     | -65 to +150            | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

All voltage values are referred to  $V_{SS}$  pin voltage.

## RECOMMENDED OPERATING CONDITIONS

| Symbol   | Parameter             | Value         | Unit |
|----------|-----------------------|---------------|------|
| $V_{DD}$ | Supply Voltage        | 3 to 20       | V    |
| $V_I$    | Input Voltage         | 0 to $V_{DD}$ | V    |
| $T_{op}$ | Operating Temperature | -55 to 125    | °C   |

## DC SPECIFICATIONS

| Symbol          | Parameter                 | Test Condition        |                       |                           |                        | Value                 |                   |      |             |      |              |      | Unit |
|-----------------|---------------------------|-----------------------|-----------------------|---------------------------|------------------------|-----------------------|-------------------|------|-------------|------|--------------|------|------|
|                 |                           | V <sub>I</sub><br>(V) | V <sub>O</sub><br>(V) | I <sub>OL</sub>  <br>(μA) | V <sub>DD</sub><br>(V) | T <sub>A</sub> = 25°C |                   |      | -40 to 85°C |      | -55 to 125°C |      |      |
|                 |                           |                       |                       |                           |                        | Min.                  | Typ.              | Max. | Min.        | Max. | Min.         | Max. |      |
| I <sub>L</sub>  | Quiescent Current         | 0/5                   |                       |                           | 5                      |                       | 0.02              | 1    |             | 30   |              | 30   | μA   |
|                 |                           | 0/10                  |                       |                           | 10                     |                       | 0.02              | 2    |             | 60   |              | 60   |      |
|                 |                           | 0/15                  |                       |                           | 15                     |                       | 0.02              | 4    |             | 120  |              | 120  |      |
|                 |                           | 0/20                  |                       |                           | 20                     |                       | 0.04              | 20   |             | 600  |              | 600  |      |
| V <sub>OH</sub> | High Level Output Voltage | 0/5                   |                       | <1                        | 5                      | 4.95                  |                   |      | 4.95        |      | 4.95         |      | V    |
|                 |                           | 0/10                  |                       | <1                        | 10                     | 9.95                  |                   |      | 9.95        |      | 9.95         |      |      |
|                 |                           | 0/15                  |                       | <1                        | 15                     | 14.95                 |                   |      | 14.95       |      | 14.95        |      |      |
| V <sub>OL</sub> | Low Level Output Voltage  | 5/0                   |                       | <1                        | 5                      |                       | 0.05              |      |             | 0.05 |              | 0.05 | V    |
|                 |                           | 10/0                  |                       | <1                        | 10                     |                       | 0.05              |      |             | 0.05 |              | 0.05 |      |
|                 |                           | 15/0                  |                       | <1                        | 15                     |                       | 0.05              |      |             | 0.05 |              | 0.05 |      |
| V <sub>IH</sub> | High Level Input Voltage  |                       | 0.5/4.5               | <1                        | 5                      | 3.5                   |                   |      | 3.5         |      | 3.5          |      | V    |
|                 |                           |                       | 1/9                   | <1                        | 10                     | 7                     |                   |      | 7           |      | 7            |      |      |
|                 |                           |                       | 1.5/13.5              | <1                        | 15                     | 11                    |                   |      | 11          |      | 11           |      |      |
| V <sub>IL</sub> | Low Level Input Voltage   |                       | 4.5/0.5               | <1                        | 5                      |                       |                   | 1.5  |             | 1.5  |              | 1.5  | V    |
|                 |                           |                       | 9/1                   | <1                        | 10                     |                       |                   | 3    |             | 3    |              | 3    |      |
|                 |                           |                       | 13.5/1.5              | <1                        | 15                     |                       |                   | 4    |             | 4    |              | 4    |      |
| I <sub>OH</sub> | Output Drive Current      | 0/5                   | 2.5                   | <1                        | 5                      | -1.36                 | -3.2              |      | -1.1        |      | -1.1         |      | mA   |
|                 |                           | 0/5                   | 4.6                   | <1                        | 5                      | -0.44                 | -1                |      | -0.36       |      | -0.36        |      |      |
|                 |                           | 0/10                  | 9.5                   | <1                        | 10                     | -1.1                  | -2.6              |      | -0.9        |      | -0.9         |      |      |
|                 |                           | 0/15                  | 13.5                  | <1                        | 15                     | -3.0                  | -6.8              |      | -2.4        |      | -2.4         |      |      |
| I <sub>OL</sub> | Output Sink Current       | 0/5                   | 0.4                   | <1                        | 5                      | 0.44                  | 1                 |      | 0.36        |      | 0.36         |      | mA   |
|                 |                           | 0/10                  | 0.5                   | <1                        | 10                     | 1.1                   | 2.6               |      | 0.9         |      | 0.9          |      |      |
|                 |                           | 0/15                  | 1.5                   | <1                        | 15                     | 3.0                   | 6.8               |      | 2.4         |      | 2.4          |      |      |
| I <sub>I</sub>  | Input Leakage Current     | 0/18                  | Any Input             |                           | 18                     |                       | ±10 <sup>-5</sup> | ±0.1 |             | ±1   |              | ±1   | μA   |
| C <sub>I</sub>  | Input Capacitance         |                       | Any Input             |                           |                        |                       | 5                 | 7.5  |             |      |              |      | pF   |


The Noise Margin for both "1" and "0" level is: 1V min. with V<sub>DD</sub>=5V, 2V min. with V<sub>DD</sub>=10V, 2.5V min. with V<sub>DD</sub>=15V

**DYNAMIC ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^{\circ}\text{C}$ ,  $C_L = 50\text{pF}$ ,  $R_L = 200\text{K}\Omega$ ,  $t_r = t_f = 20\text{ ns}$ )

| Symbol              | Parameter                                         | Test Condition |  | Value (*)                       |      |      | Unit          |
|---------------------|---------------------------------------------------|----------------|--|---------------------------------|------|------|---------------|
|                     |                                                   | $V_{DD}$ (V)   |  | Min.                            | Typ. | Max. |               |
| $t_{PLH}$ $t_{PHL}$ | Propagation Delay Time<br>(DATA IN to Q)          | 5              |  |                                 | 110  | 220  | ns            |
|                     |                                                   | 10             |  |                                 | 55   | 110  |               |
|                     |                                                   | 15             |  |                                 | 40   | 80   |               |
| $t_{PLH}$ $t_{PHL}$ | Propagation Delay Time<br>(DATA IN to $\bar{Q}$ ) | 5              |  |                                 | 150  | 300  | ns            |
|                     |                                                   | 10             |  |                                 | 75   | 150  |               |
|                     |                                                   | 15             |  |                                 | 50   | 100  |               |
| $t_{PLH}$ $t_{PHL}$ | Propagation Delay Time<br>(CLOCK to Q)            | 5              |  |                                 | 225  | 450  | ns            |
|                     |                                                   | 10             |  |                                 | 100  | 200  |               |
|                     |                                                   | 15             |  |                                 | 80   | 160  |               |
| $t_{PLH}$ $t_{PHL}$ | Propagation Delay Time<br>(CLOCK to $\bar{Q}$ )   | 5              |  |                                 | 250  | 500  | ns            |
|                     |                                                   | 10             |  |                                 | 115  | 230  |               |
|                     |                                                   | 15             |  |                                 | 90   | 180  |               |
| $t_{THL}$ $t_{TLH}$ | Transition Time                                   | 5              |  |                                 | 100  | 200  | ns            |
|                     |                                                   | 10             |  |                                 | 50   | 100  |               |
|                     |                                                   | 15             |  |                                 | 40   | 80   |               |
| $t_W$               | Clock Pulse Width                                 | 5              |  | 200                             | 100  |      | ns            |
|                     |                                                   | 10             |  | 100                             | 50   |      |               |
|                     |                                                   | 15             |  | 60                              | 30   |      |               |
| $t_{setup}$         | Setup Time                                        | 5              |  | 50                              | 0    |      | ns            |
|                     |                                                   | 10             |  | 30                              | 0    |      |               |
|                     |                                                   | 15             |  | 25                              | 0    |      |               |
| $t_{hold}$          | Hold Time                                         | 5              |  |                                 | 120  | 60   | ns            |
|                     |                                                   | 10             |  |                                 | 60   | 30   |               |
|                     |                                                   | 15             |  |                                 | 50   | 25   |               |
| $t_r$ , $t_f$       | Input Pulse Rise and Fall Time                    | 5              |  | Not Rise or Fall Time Sensitive |      |      | $\mu\text{s}$ |
|                     |                                                   | 10             |  |                                 |      |      |               |
|                     |                                                   | 15             |  |                                 |      |      |               |

(\*) Typical temperature coefficient for all  $V_{DD}$  value is 0.3 %/ $^{\circ}\text{C}$ .

## TEST CIRCUIT

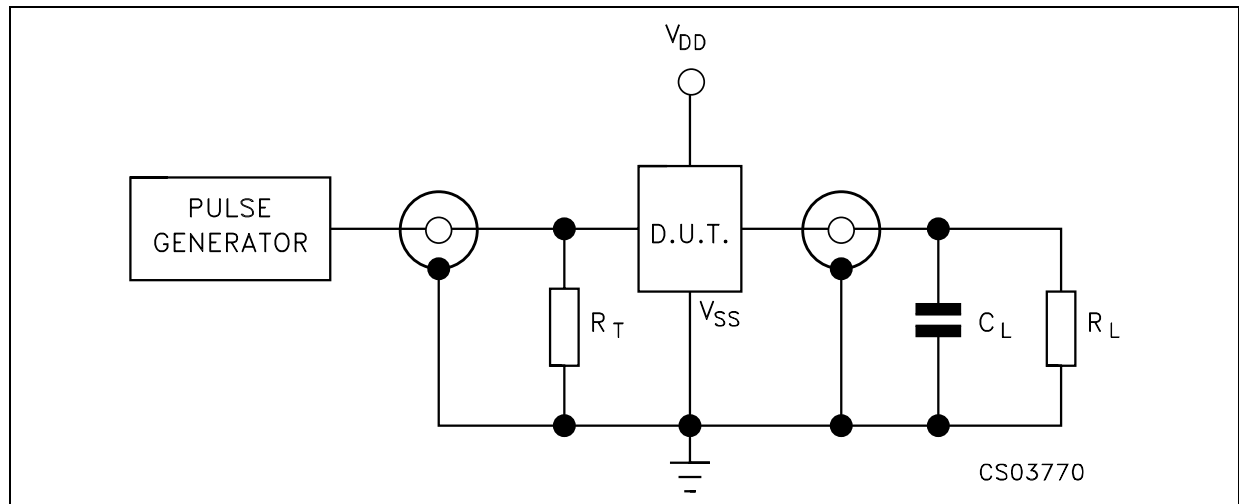

$C_L$  = 50pF or equivalent (includes jig and probe capacitance)  
 $R_L$  = 200K $\Omega$   
 $R_T$  =  $Z_{OUT}$  of pulse generator (typically 50 $\Omega$ )


### Plastic DIP-16 (0.25) MECHANICAL DATA

| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |



SO-16 MECHANICAL DATA

| DIM. | mm.        |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.003 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |

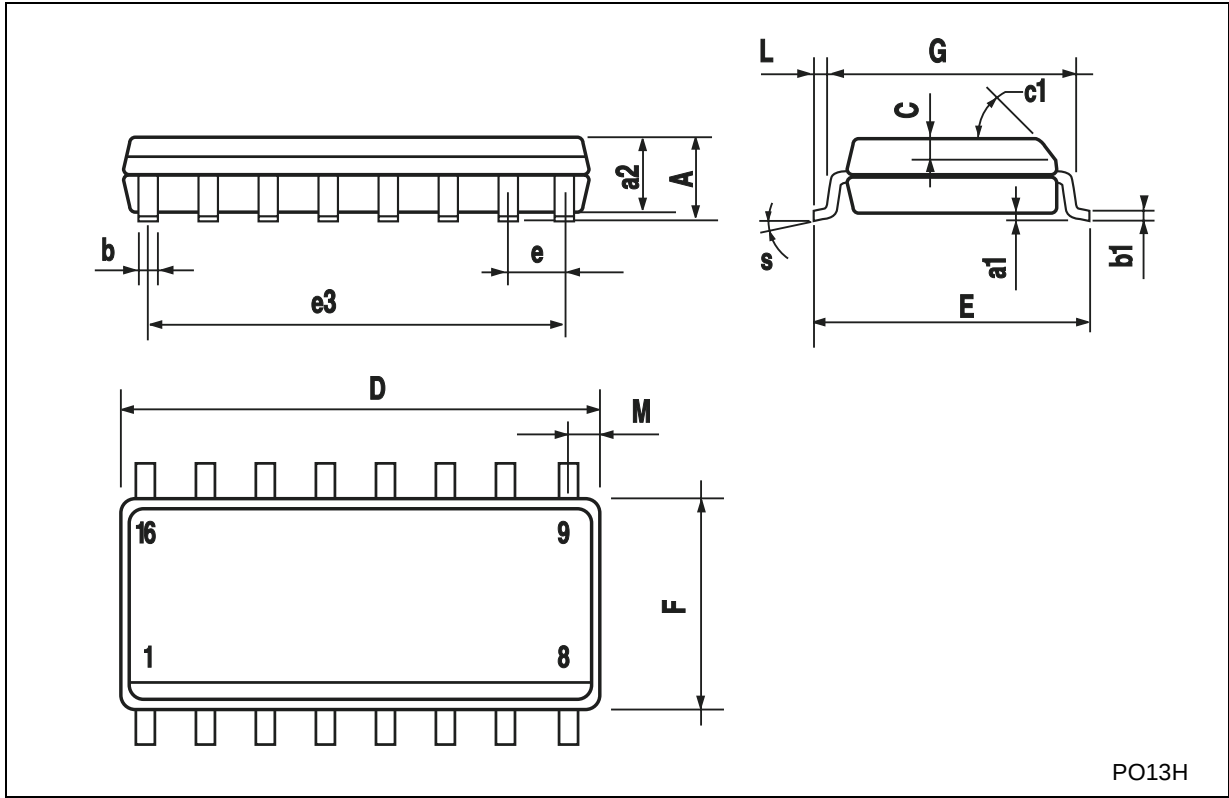

PO13H



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>

