


RF & MICROWAVE TRANSISTORS GENERAL PURPOSE LINEAR APPLICATIONS

- EMITTER BALLASTED
- CLASS A LINEAR OPERATION
- COMMON EMITTER
- VSWR CAPABILITY $\infty:1$ @ RATED CONDITIONS
- ft 1.6 GHz TYPICAL
- NOISE FIGURE 15.5 dB @ 2 GHz
- $P_{OUT} = 27$ dBm MIN. @ 1.0 GHz



.230 4L STUD (S027)
hermetically sealed


ORDER CODE
MSC82040

BRANDING
82040

DESCRIPTION

The MSC82040 is a hermetically sealed NPN power transistor with a fishbone, emitter finger ballasted geometry utilizing a refractory/gold metallization system. The device is designed specifically for Class A linear applications to provide high gain and high output power at the 1.0 dB compression point.

PIN CONNECTION



1. Collector 3. Base
2. Emitter 4. Emitter

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}\text{C}$)

Symbol	Parameter	Value	Unit
P_{DISS}	Power Dissipation (see Safe Area)	—	W
I_C	Device Bias Current	200	mA
V_{CE}	Collector-Emitter Bias Voltage*	20	V
T_J	Junction Temperature	200	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	- 65 to +200	$^{\circ}\text{C}$

THERMAL DATA

$R_{TH(j-c)}$	Junction-Case Thermal Resistance*	20	$^{\circ}\text{C/W}$
---------------	-----------------------------------	----	----------------------

*Applies only to rated RF amplifier operation

MSC82040

ELECTRICAL SPECIFICATIONS ($T_{\text{case}} = 25^{\circ}\text{C}$)

STATIC





Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CBO}	$I_{\text{C}} = 1\text{mA}$	$I_{\text{E}} = 0\text{mA}$	45	—	—	V
BV_{EBO}	$I_{\text{E}} = 1\text{mA}$	$I_{\text{C}} = 0\text{mA}$	3.5	—	—	V
BV_{CEO}	$I_{\text{C}} = 5\text{mA}$	$I_{\text{B}} = 0\text{mA}$	20	—	—	V
I_{CEO}	$V_{\text{CE}} = 18\text{V}$		—	—	0.5	mA
h_{FE}	$V_{\text{CE}} = 5\text{V}$	$I_{\text{C}} = 100\text{mA}$	15	—	120	—

DYNAMIC


Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
G_{P}^*	$f = 1.0\text{ GHz}$	$P_{\text{OUT}} = 27\text{ dBm}$	10.5	11.5	—	dB
ΔG_{P}^*	$f = 1.0\text{ GHz}$	$P_{\text{OUT}} = 27\text{ dBm}$ $\Delta P_{\text{OUT}} = 10\text{ dB}$	—	—	1	dB
C_{OB}	$f = 1\text{ MHz}$	$V_{\text{CB}} = 28\text{ V}$	—	—	3.2	pF

* Note: $V_{\text{CE}} = 18\text{V}$
 $I_{\text{C}} = 100\text{mA}$

TYPICAL PERFORMANCE

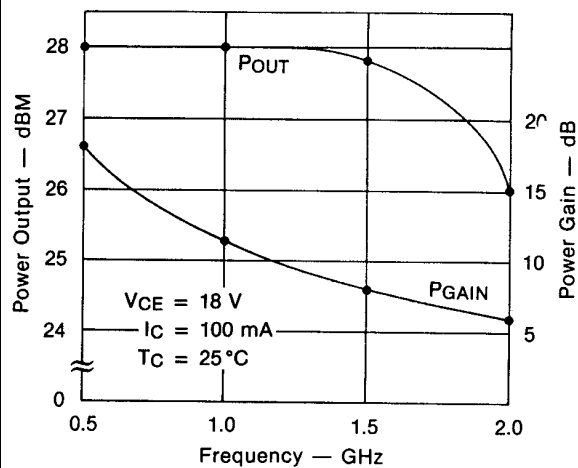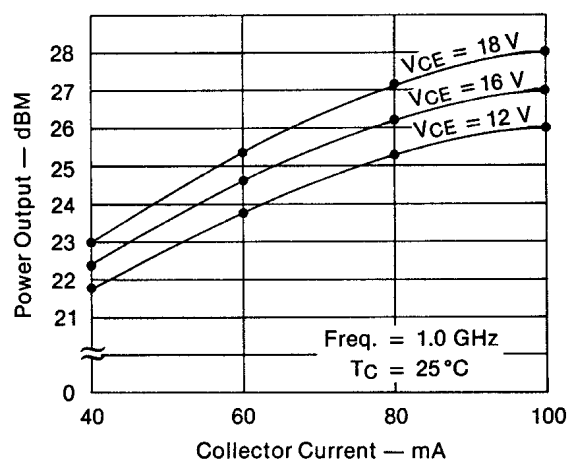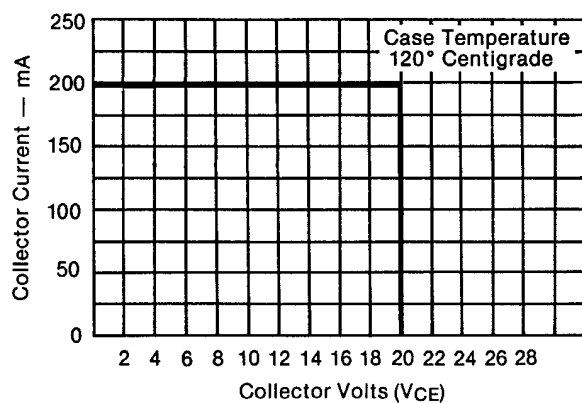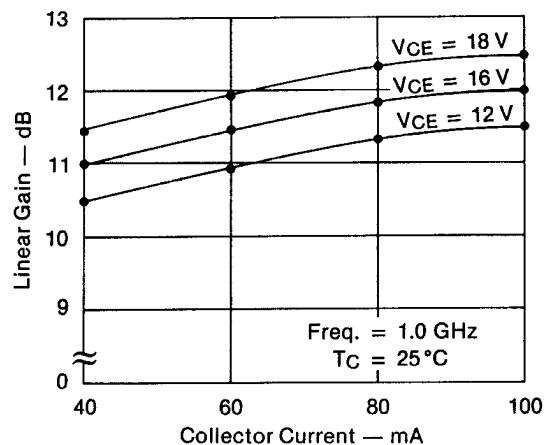
TYPICAL POWER OUTPUT & GAIN @ 1dB
COMPRESSION POINT vs FREQUENCYTYPICAL POWER OUTPUT & GAIN @
1dB COMPRESSION POINT vs
COLLECTOR CURRENTMAXIMUM OPERATING AREA FOR
FORWARD BIAS OPERATIONTYPICAL LINEAR GAIN vs
COLLECTOR CURRENT

TYPICAL S-PARAMETERS

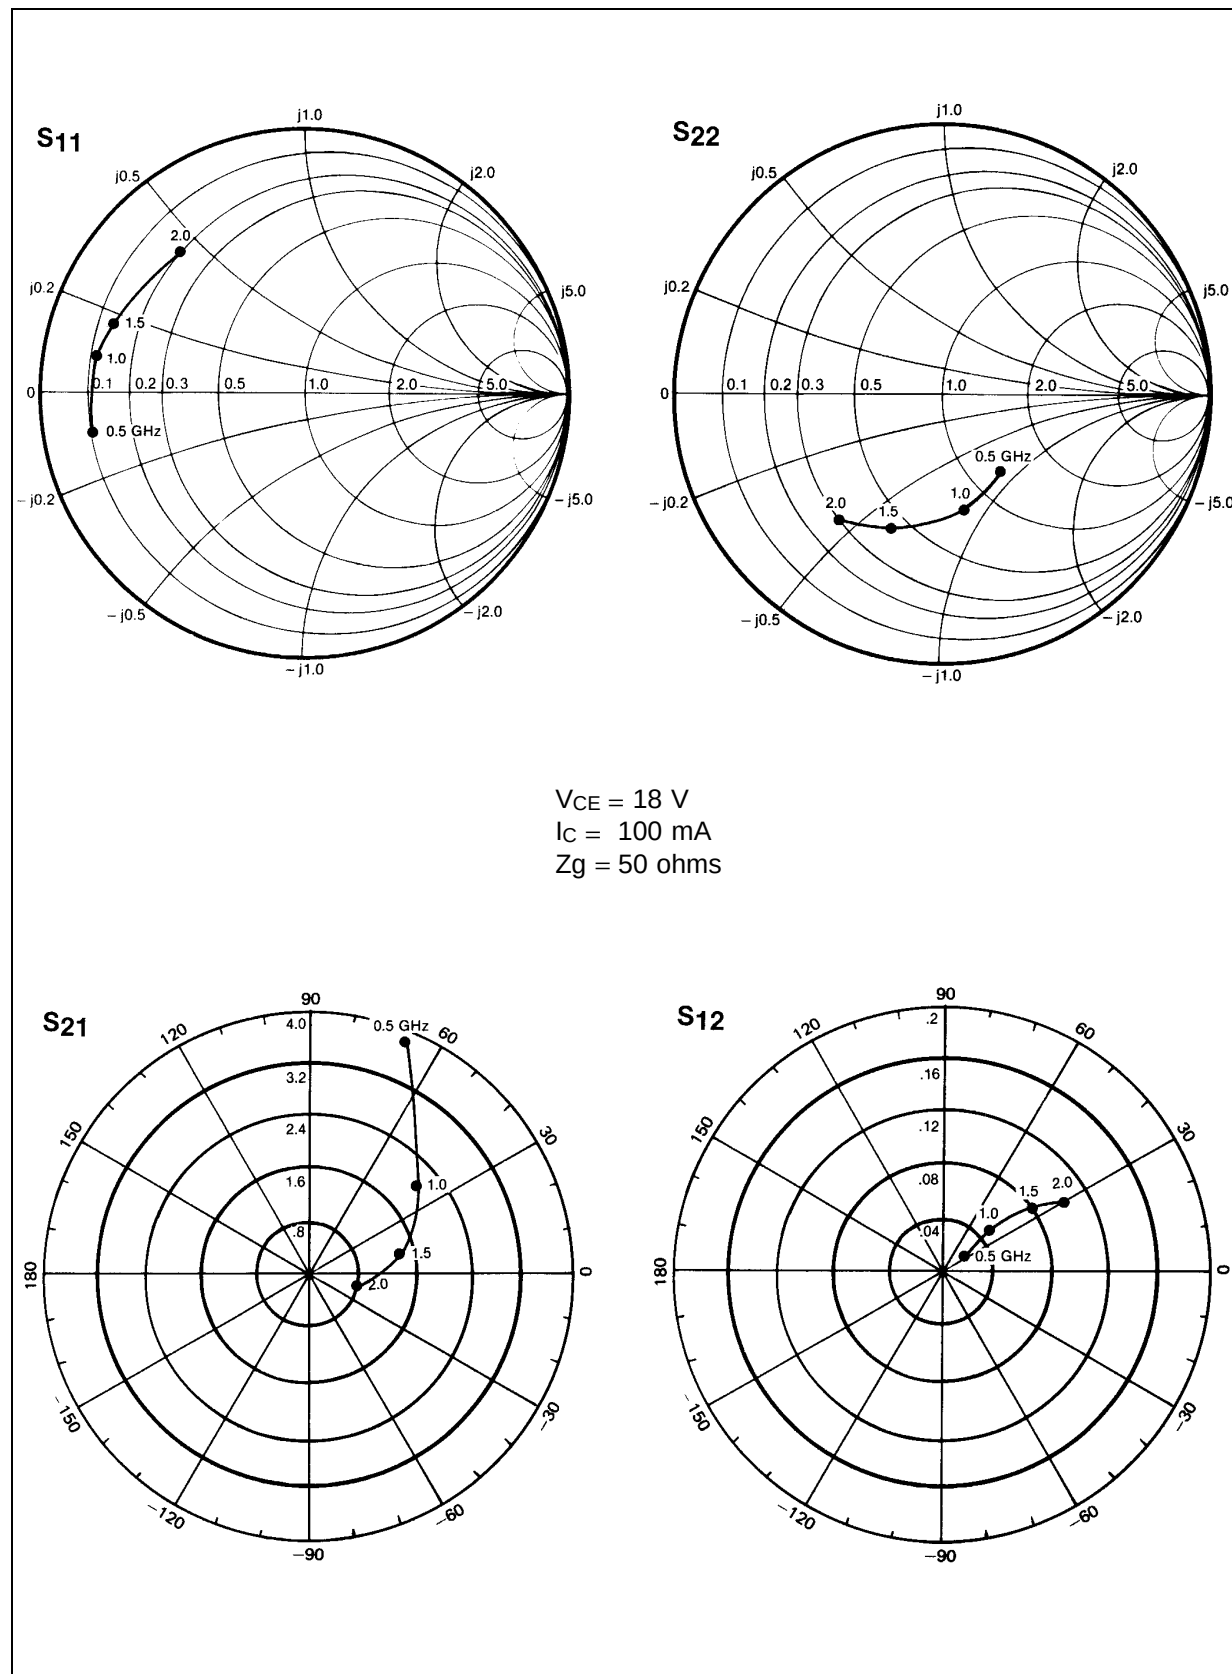

TEST CIRCUIT


Ref.: Dwg. No. C127323

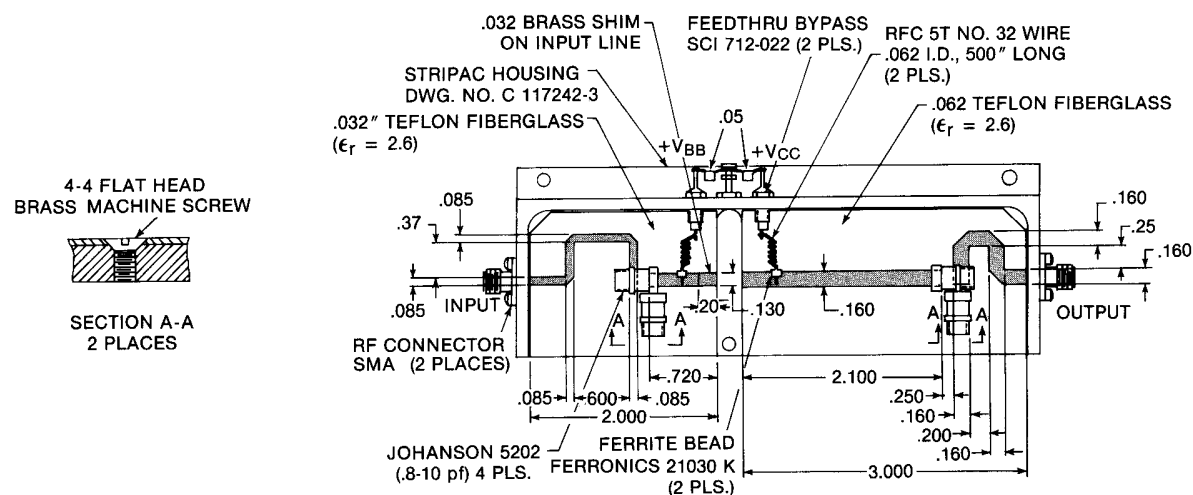

All dimensions are in inches.
Frequency 1.0 GHz

PACKAGE MECHANICAL DATA

Ref.: Dwg. No.: J135023F

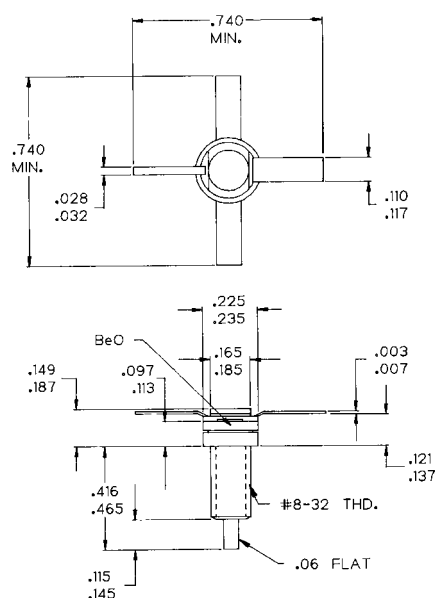

NOTES:
1. ALL TOLERANCE $\pm .010$ EXCEPT WHERE NOTED;
DIMENSIONS IN INCHES.

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A