



STGW50NB60H

N-CHANNEL 50A - 600V - TO-247

PowerMESH™ IGBT

TYPE	V _{CES}	V _{CE(sat)} (Max)	I _C
STGW50NB60H	600 V	< 2.8 V	50 A


- HIGH INPUT IMPEDANCE (VOLTAGE DRIVEN)
- LOW ON-VOLTAGE DROP (V_{CESAT})
- LOW GATE CHARGE
- HIGH CURRENT CAPABILITY
- VERY HIGH FREQUENCY OPERATION
- OFF LOSSES INCLUDE TAIL CURRENT

DESCRIPTION

Using the latest high voltage technology based on a patented strip layout, STMicroelectronics has designed an advanced family of IGBTs, the PowerMESH™ IGBTs, with outstanding performances. The suffix "H" identifies a family optimized to achieve very low switching times for high frequency applications (<120KHz).


APPLICATIONS

- HIGH FREQUENCY MOTOR CONTROLS
- WELDING EQUIPMENTS
- SMPS AND PFC IN BOTH HARD SWITCH AND RESONANT TOPOLOGIES



TO-247

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CES}	Collector-Emitter Voltage (V _{GS} = 0)	600	V
V _{ECR}	Emitter-Collettor Voltage	20	V
V _{GE}	Gate-Emitter Voltage	±20	V
I _C	Collector Current (continuous) at T _C = 25°C	100	A
I _C	Collector Current (continuous) at T _C = 100°C	50	A
I _{CM} (■)	Collector Current (pulsed)	400	A
P _{TOT}	Total Dissipation at T _C = 25°C	250	W
	Derating Factor	2	W/°C
T _{stg}	Storage Temperature	-65 to 150	°C
T _j	Max. Operating Junction Temperature	150	°C

(●) Pulse width limited by safe operating area

STGW50NB60H

THERMAL DATA

Rthj-case	Thermal Resistance Junction-case Max	0.5	°C/W
Rthj-amb	Thermal Resistance Junction-ambient Max	30	°C/W
Rthc-h	Thermal Resistance Case-heatsink Typ	0.1	°C/W

ELECTRICAL CHARACTERISTICS (T_{CASE} = 25 °C UNLESS OTHERWISE SPECIFIED)

OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{BR} (CES)	Collectro-Emitter Breakdown Voltage	I _C = 250 µA, V _{GE} = 0	600			V
I _{CES}	Collector cut-off (V _{GE} = 0)	V _{CE} = Max Rating, T _C = 25 °C V _{CE} = Max Rating, T _C = 125 °C			10 100	µA µA
I _{GES}	Gate-Emitter Leakage Current (V _{CE} = 0)	V _{GE} = ± 20 V, V _{CE} = 0			± 100	nA

ON (*)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{GE} (th)	Gate Threshold Voltage	V _{CE} = V _{GE} , I _C = 250 µA	3		5	V
V _{CE} (sat)	Collector-Emitter Saturation Voltage	V _{GE} =15 V, I _C =50 A V _{GE} =15 V, I _C =30 A, T _C =125°C		2.3 1.9	2.8	V V

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g _{fs}	Forward Transconductance	V _{CE} = 25 V, I _C = 50 A		22		S
C _{ies}	Input Capacitance	V _{CE} = 25 V, f = 1 MHz, V _{GE} = 0		4500		pF
C _{oes}	Output Capacitance			450		pF
C _{res}	Reverse Transfer Capacitance			90		pF
Q _g Q _{ge} Q _{gc}	Total Gate Charge Gate-Emitter Charge Gate-Collector Charge	V _{CE} = 480 V, I _C = 50 A, V _{GE} = 15 V		260 28 115		nC nC nC
I _{CL}	Latching Current	V _{clamp} = 480 V, R _G = 10 Ω V _{GE} = 15 V, T _J = 150°C	300			A

SWITCHING ON

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
t _d (on)	Delay Time	V _{CC} = 480 V, I _C = 50 A		30		ns
t _r	Rise Time	V _{GE} = 15 V, R _G = 10Ω		110		ns
(di/dt) _{on} E _{on}	Turn-on Current Slope Turn-on Switching Losses	V _{CC} = 480 V, I _C = 50 A, R _G = 10 Ω V _{GE} = 15 V, T _J = 125°C		600 600		A/µs µJ


ELECTRICAL CHARACTERISTICS (CONTINUED)**SWITCHING OFF**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
t_c	Cross-over Time	$V_{CC} = 480\text{ V}$, $I_C = 50\text{ A}$, $R_{GE} = 10\ \Omega$, $V_{GE} = 15\text{ V}$		166		ns
$t_r(V_{off})$	Off Voltage Rise Time			48		ns
$t_d(off)$	Delay Time			326		ns
t_f	Fall Time			100		ns
$E_{off}^{(**)}$	Turn-off Switching Loss			2.1		mJ
E_{ts}	Total Switching Loss			2.7		mJ
t_c	Cross-over Time	$V_{CC} = 480\text{ V}$, $I_C = 50\text{ A}$, $R_{GE} = 10\ \Omega$, $V_{GE} = 15\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$		270		ns
$t_r(V_{off})$	Off Voltage Rise Time			75		ns
$t_d(off)$	Delay Time			320		ns
t_f	Fall Time			200		ns
$E_{off}^{(**)}$	Turn-off Switching Loss			2.9		mJ
E_{ts}	Total Switching Loss			3.5		mJ


Note: (*) Pulsed: Pulse duration = 300 μs , duty cycle 1.5 %.

(**) Losses include Also the Tail (Jedec Standardization)


Thermal Impedance

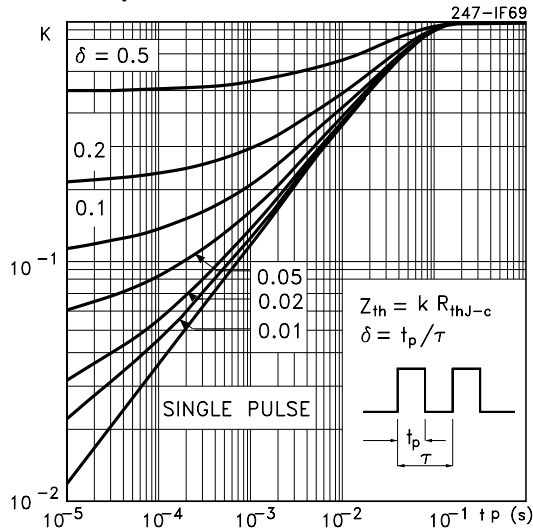


Switching Off Safe Operating Area

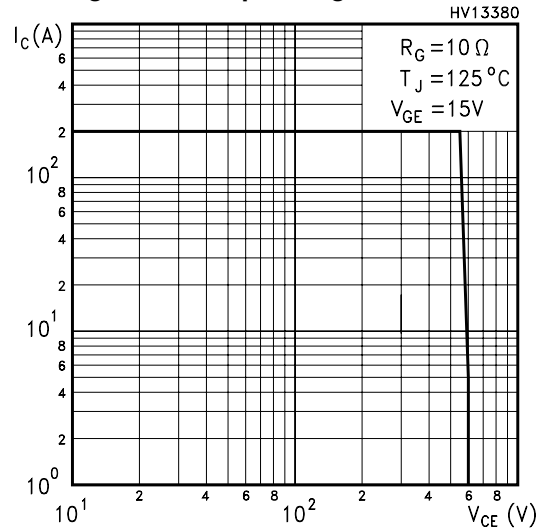


Output Characteristics

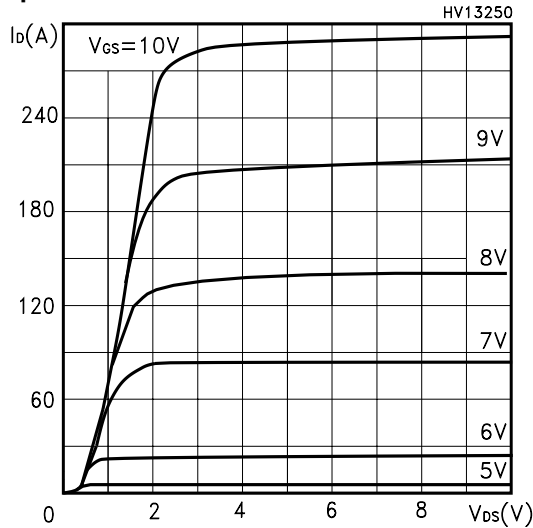


Transfer Characteristics

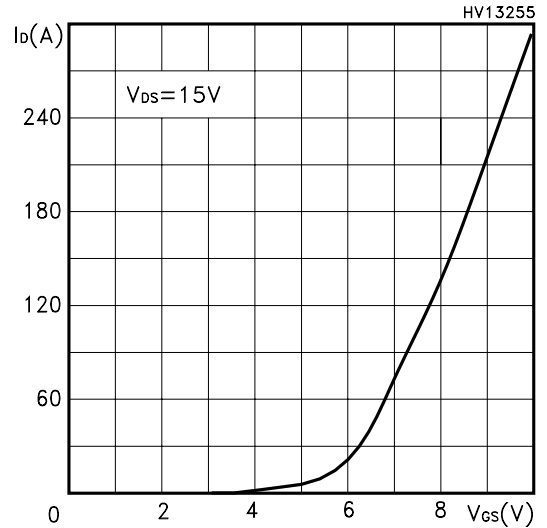


Normalized Gate Threshold Voltage vs Temp.

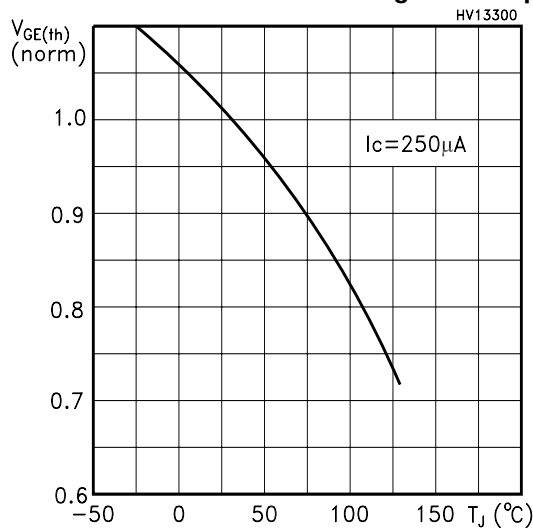


Transconductance

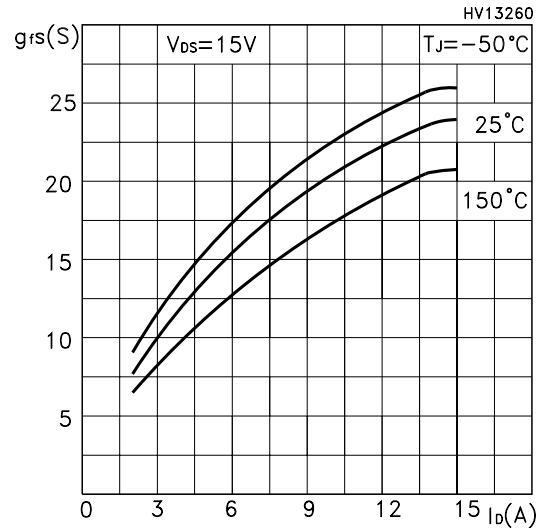


Collector-Emitter On Voltage vs Temperature

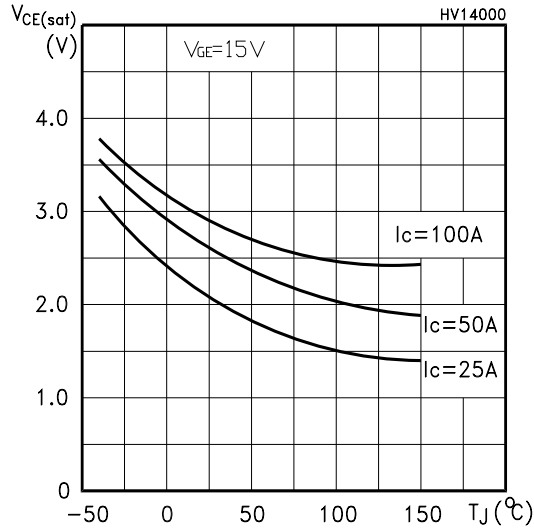


Gate-Charge vs Gate-Emitter Voltage

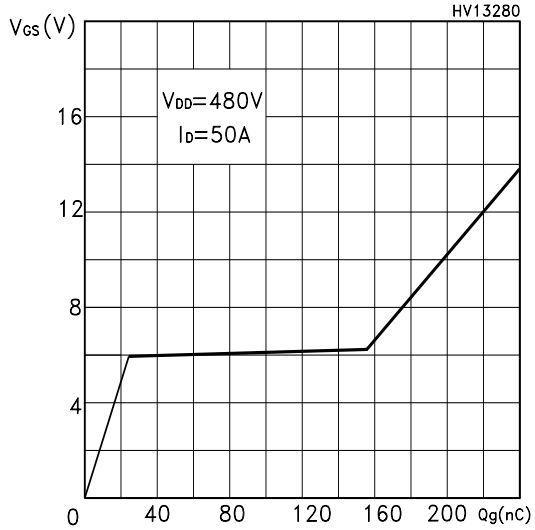


Capacitance Variations

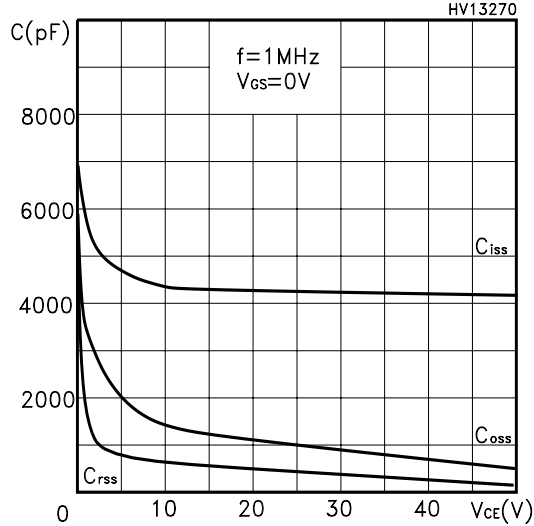


Normalized Break-down Voltage vs Temp.

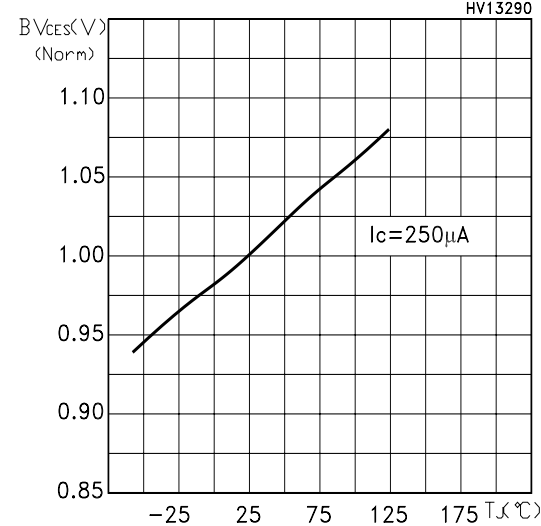

Total Switching losses vs Gate Resistance

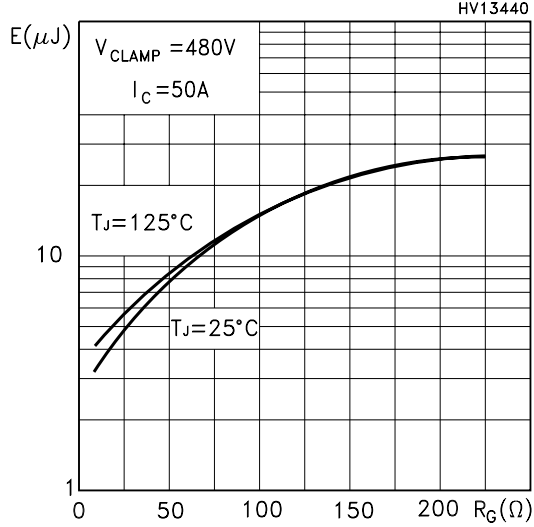

Total Switching losses vs Temperature

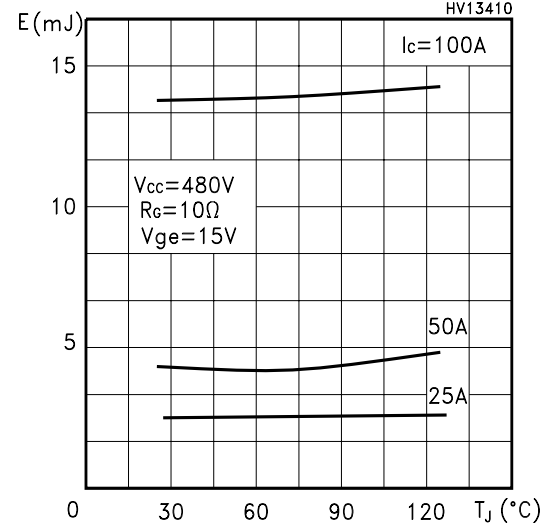

Total Switching losses vs I_c

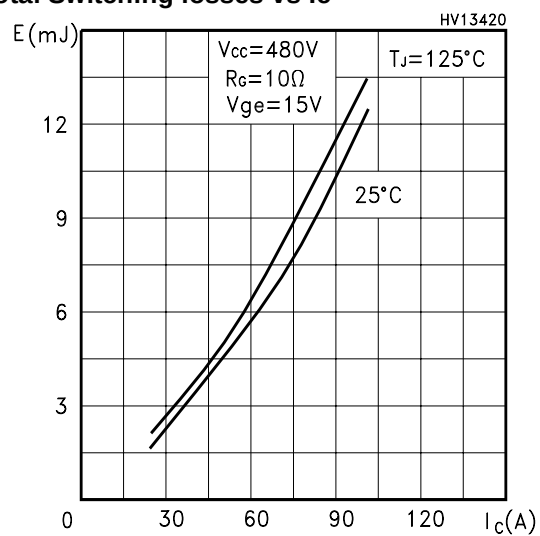


Fig. 1: Gate Charge test Circuit

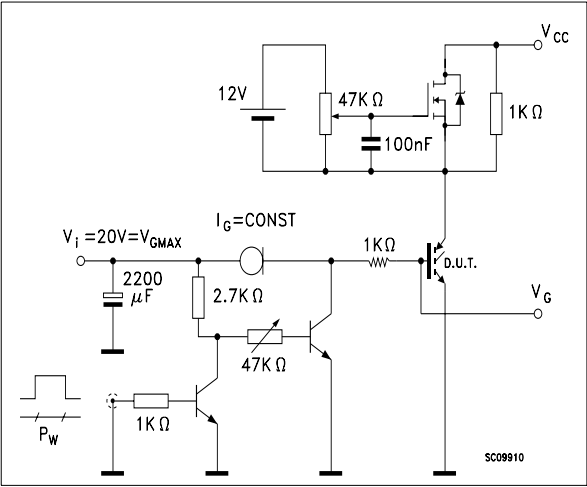


Fig. 2: Test Circuit For Inductive Load Switching



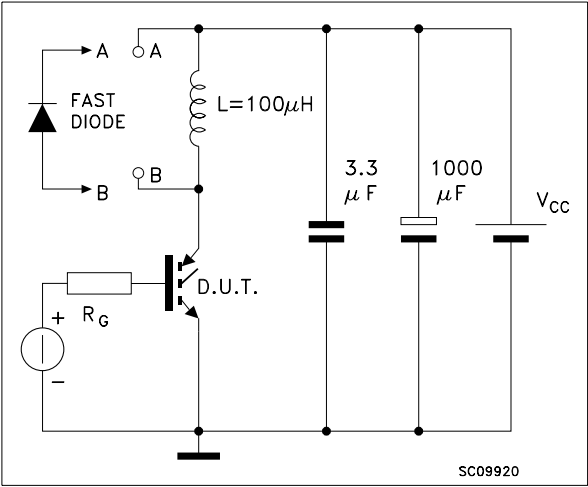


Fig. 3: Switching Waveforms

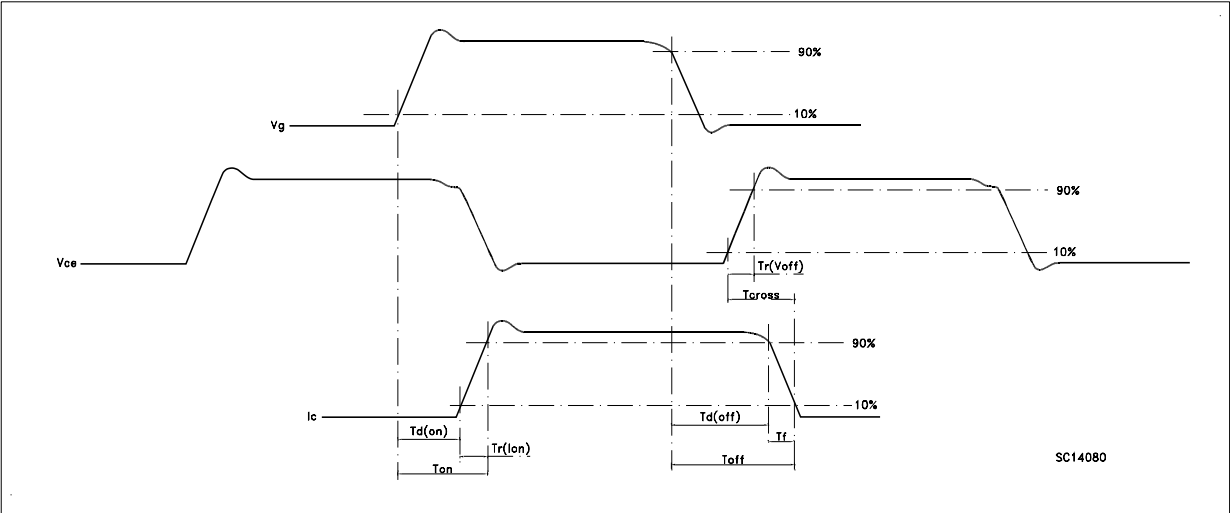

TO-247 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.85		5.15	0.19		0.20
D	2.20		2.60	0.08		0.10
E	0.40		0.80	0.015		0.03
F	1		1.40	0.04		0.05
F1		3			0.11	
F2		2			0.07	
F3	2		2.40	0.07		0.09
F4	3		3.40	0.11		0.13
G		10.90			0.43	
H	15.45		15.75	0.60		0.62
L	19.85		20.15	0.78		0.79
L1	3.70		4.30	0.14		0.17
L2		18.50			0.72	
L3	14.20		14.80	0.56		0.58
L4		34.60			1.36	
L5		5.50			0.21	
M	2		3	0.07		0.11
V		5°			5°	
V2		60°			60°	
Dia	3.55		3.65	0.14		0.143

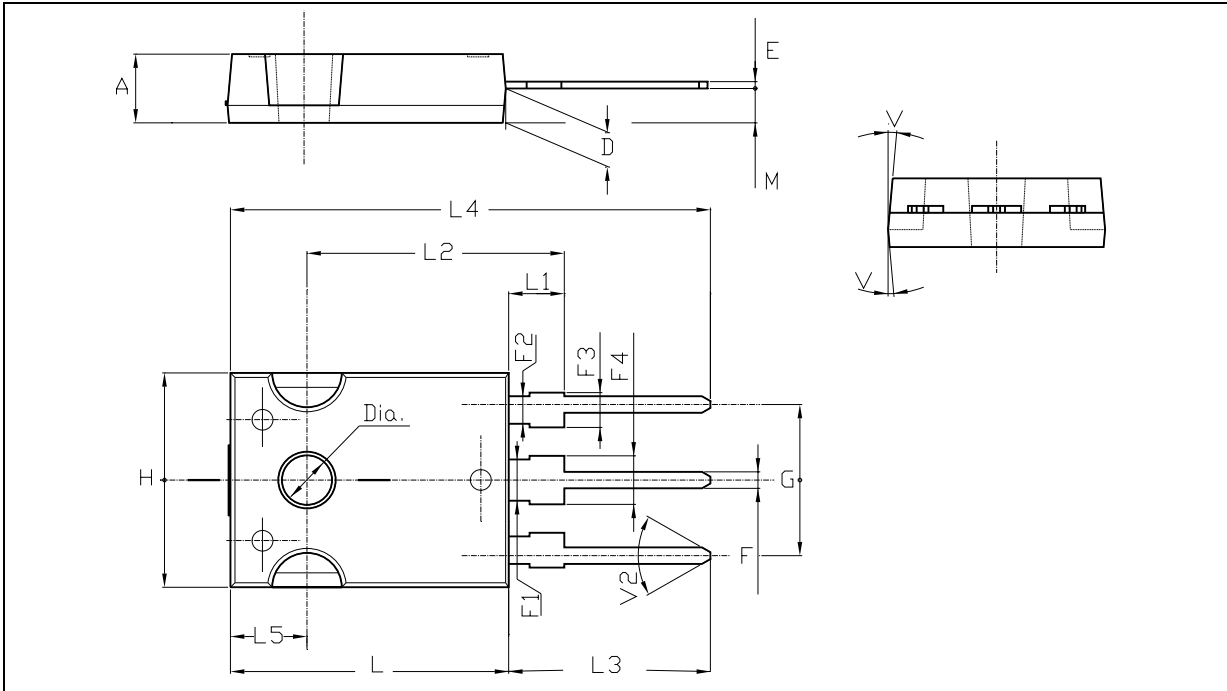

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>