

**HIGH EFFICIENCY ULTRAFAST DIODE**
**MAIN PRODUCT CHARACTERISTICS**

<b>I<sub>F(AV)</sub></b>	<b>1 A</b>
<b>V<sub>RRM</sub></b>	<b>200 V</b>
<b>T<sub>j</sub> (max)</b>	<b>175 °C</b>
<b>V<sub>F</sub> (max)</b>	<b>0.78 V</b>
<b>t<sub>rr</sub> (max)</b>	<b>20 ns</b>

**FEATURES AND BENEFITS**

- Very low conduction losses
- Negligible switching losses
- Low forward and reverse recovery times
- High junction temperature

**DESCRIPTION**

The STTH102, which is using ST's new 200V planar technology, is specially suited for switching mode base drive & transistor circuits.

The device is also intended for use as a free wheeling diode in power supplies and other power switching applications.


**ABSOLUTE RATINGS** (limiting values)

Symbol	Parameter		Value	Unit
V <sub>RRM</sub>	Repetitive peak reverse voltage		200	V
I <sub>F(AV)</sub>	Average forward current	T <sub>I</sub> = 130°C    δ = 0.5	1	A
I <sub>FSM</sub>	Surge non repetitive forward current	t <sub>p</sub> = 10 ms    Sinusoidal	50	A
T <sub>stg</sub>	Storage temperature range		- 65 + 175	°C
T <sub>j</sub>	Maximum operating junction temperature		+ 175	°C

**THERMAL PARAMETERS**

Symbol	Parameter	Maximum	Unit
R <sub>th(j-a)</sub>	Junction to ambient*	50	°C/W

\* On infinite heatsink with 10mm length.

## STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			1	$\mu\text{A}$
		$T_j = 125^\circ\text{C}$			1	25	
$V_F^{**}$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$			0.97	V
		$T_j = 125^\circ\text{C}$			0.68	0.78	

Pulse test: \*  $t_p = 5\text{ms}$ ,  $\delta < 2\%$

\*\*  $t_p = 380\mu\text{s}$ ,  $\delta < 2\%$


To evaluate the maximum conduction losses use the following equation :

$$P = 0.65 \times I_{F(AV)} + 0.130 \times I_{F(RMS)}^2$$


## DYNAMIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$t_{rr}$	Reverse recovery time	$I_F = 0.5\text{A}$ $I_{rr} = 0.25\text{A}$ $I_R = 1\text{A}$	$T_j = 25^\circ\text{C}$		12	20	ns
$t_{fr}$	Forward recovery time	$I_F = 1\text{A}$ $dI_F/dt = 50\text{A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$	$T_j = 25^\circ\text{C}$		50		ns
$V_{FP}$	Forward recovery voltage		$T_j = 25^\circ\text{C}$		1.8		V


**Fig. 1:** Average forward power dissipation versus average forward current.

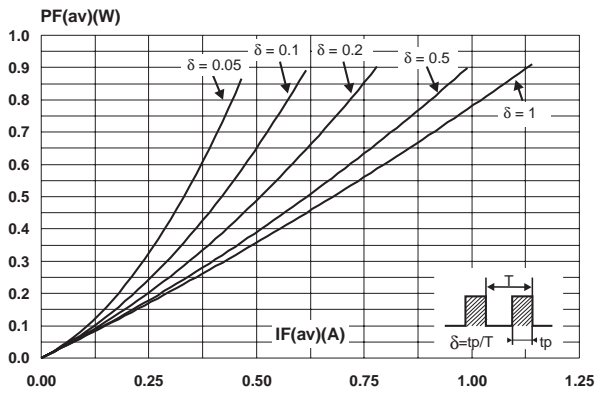


**Fig. 2:** Average forward current versus ambient temperature ( $\delta = 0.5$ ).

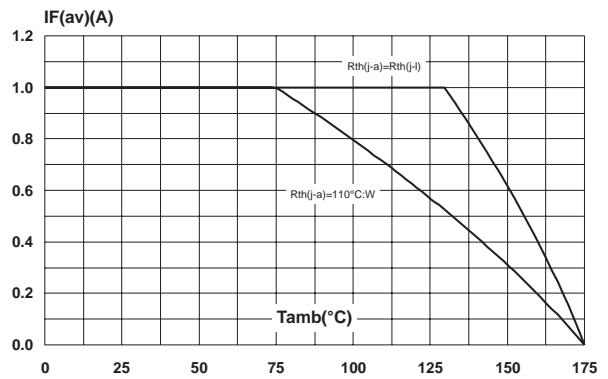


**Fig. 3:** Thermal resistance versus lead length.

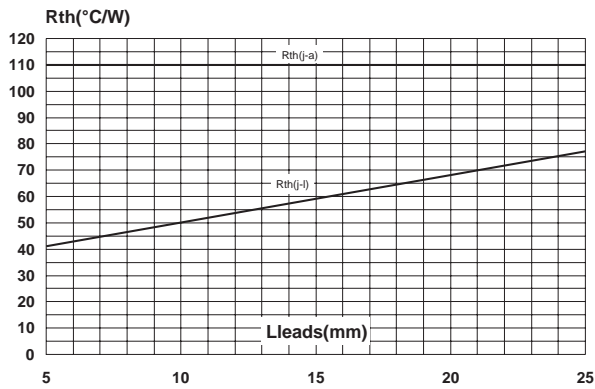


**Fig. 4:** Relative variation of thermal impedance junction ambient versus pulse duration (Printed circuit board epoxy FR4, Leads = 10mm).

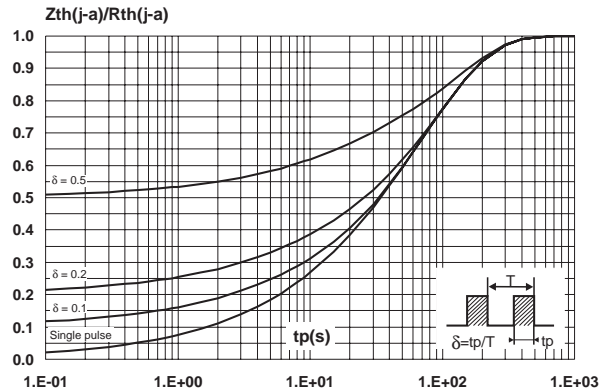


**Fig. 5:** Forward voltage drop versus forward current.

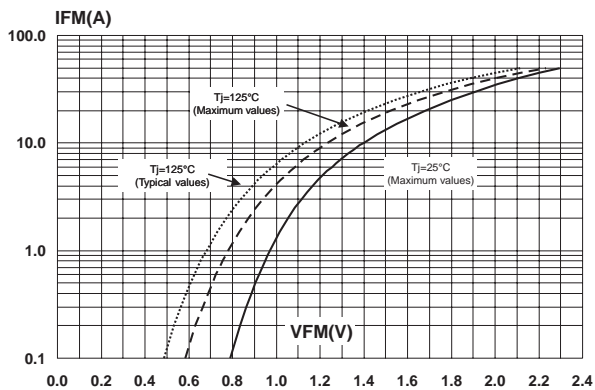


**Fig. 6:** Junction capacitance versus reverse voltage applied (typical values).

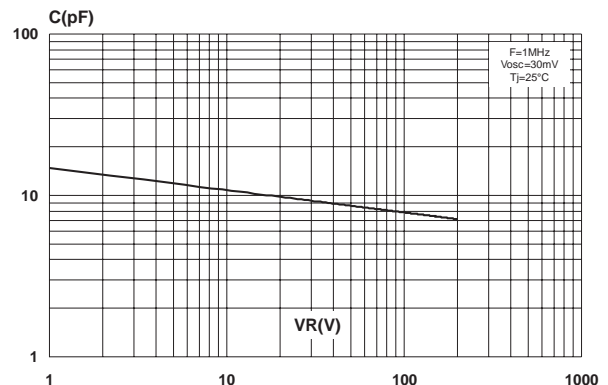


**Fig. 7:** Reverse recovery time versus  $dI/dt$  (90% confidence).

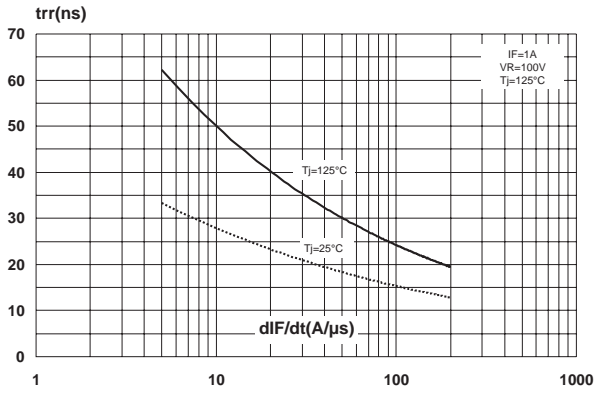

**Fig. 8:** Peak reverse recovery current versus  $dI/dt$  (90% confidence).

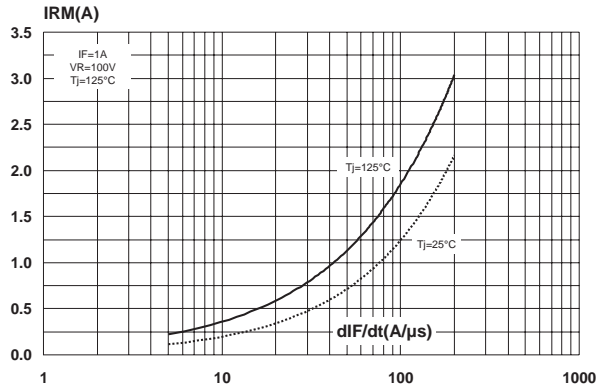

**Fig. 9:** Relative variations of dynamic parameters versus junction temperature.

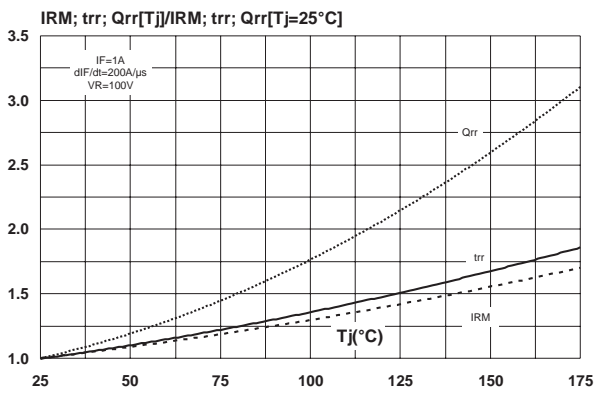

## PACKAGE MECHANICAL DATA

DO-41

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.1	5.20	0.160	0.205
B	2	2.71	0.080	0.107
C	25.4		1	
D	0.712	0.863	0.028	0.034

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STTH102	STTH102	DO-41	0.34 g	2000	Ammopack
STTH102RL	STTH102	DO-41	0.34 g	5000	Tape & reel

- Cooling method: by conduction (method A)
- Epoxy meets UL 94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
 © 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES  
 Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia  
 Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>