

## PRECISION SINGLE OPERATIONAL AMPLIFIER

- INPUT OFFSET VOLTAGE : 3mV max. OVER TEMPERATURE
- FREQUENCY COMPENSATION WITH A SINGLE 30pF CAPACITOR (C1)
- OPERATION FROM  $\pm 5V$  to  $\pm 15V$
- LOW POWER CONSUMPTION : 50mW AT  $\pm 15V$
- CONTINUOUS SHORT-CIRCUIT PROTECTION
- OPERATION AS A COMPARATOR WITH DIFFERENTIAL INPUTS AS HIGH AS  $\pm 30V$
- NO LATCH-UP WHEN COMMON-MODE RANGE IS EXCEEDED
- SAME PIN CONFIGURATION AS THE LM101A



### DESCRIPTION

The UA748 is a general purpose operational amplifier built on a single silicon chip. The resulting close match and tight thermal coupling gives low offsets and temperature drift as well as fast recovery from thermal transients.

- Short-circuit protection
- Offset voltage null capability
- Large common-mode and differential voltage ranges
- Low power consumption
- No latch-up

The unity-gain compensation specified makes the circuit stable for all feedback configurations, even with capacitive loads. However, it is possible to optimize compensation for best high frequency performance at any gain. The low power dissipation permits high voltage operation and simplifies packaging in full-temperature range systems.

### PIN CONNECTIONS (top view)

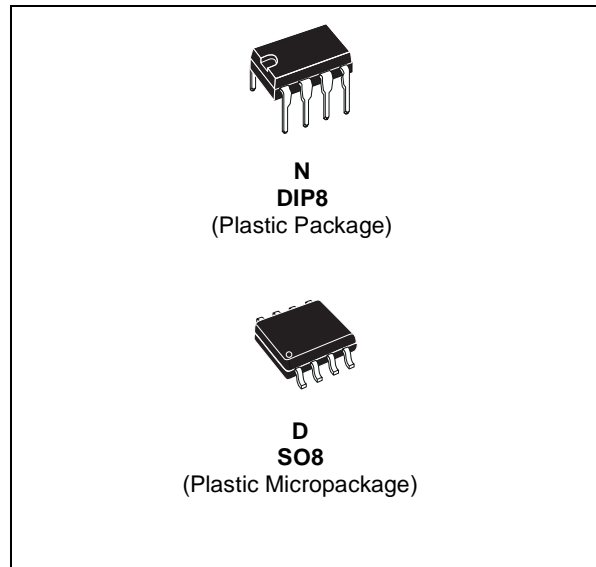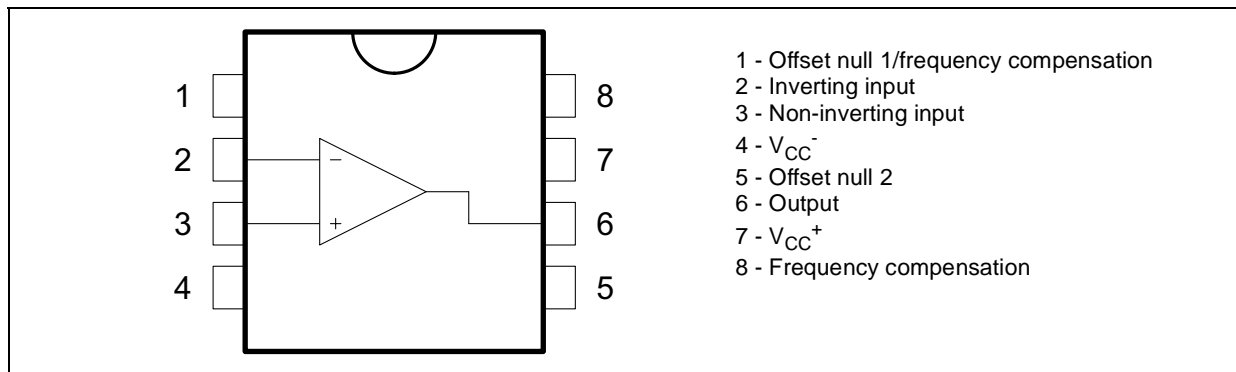


### ORDER CODE

| Part Number              | Temperature Range | Package |   |
|--------------------------|-------------------|---------|---|
|                          |                   | N       | D |
| UA748C                   | 0°C, +70°C        | •       | • |
| UA748I                   | -40°C, +105°C     | •       | • |
| UA748M                   | -55°C, +125°C     | •       | • |
| <b>Example : UA748CN</b> |                   |         |   |

**N** = Dual in Line Package (DIP)  
**D** = Small Outline Package (SO) - also available in Tape & Reel (DT)

**SCHEMATIC DIAGRAM**




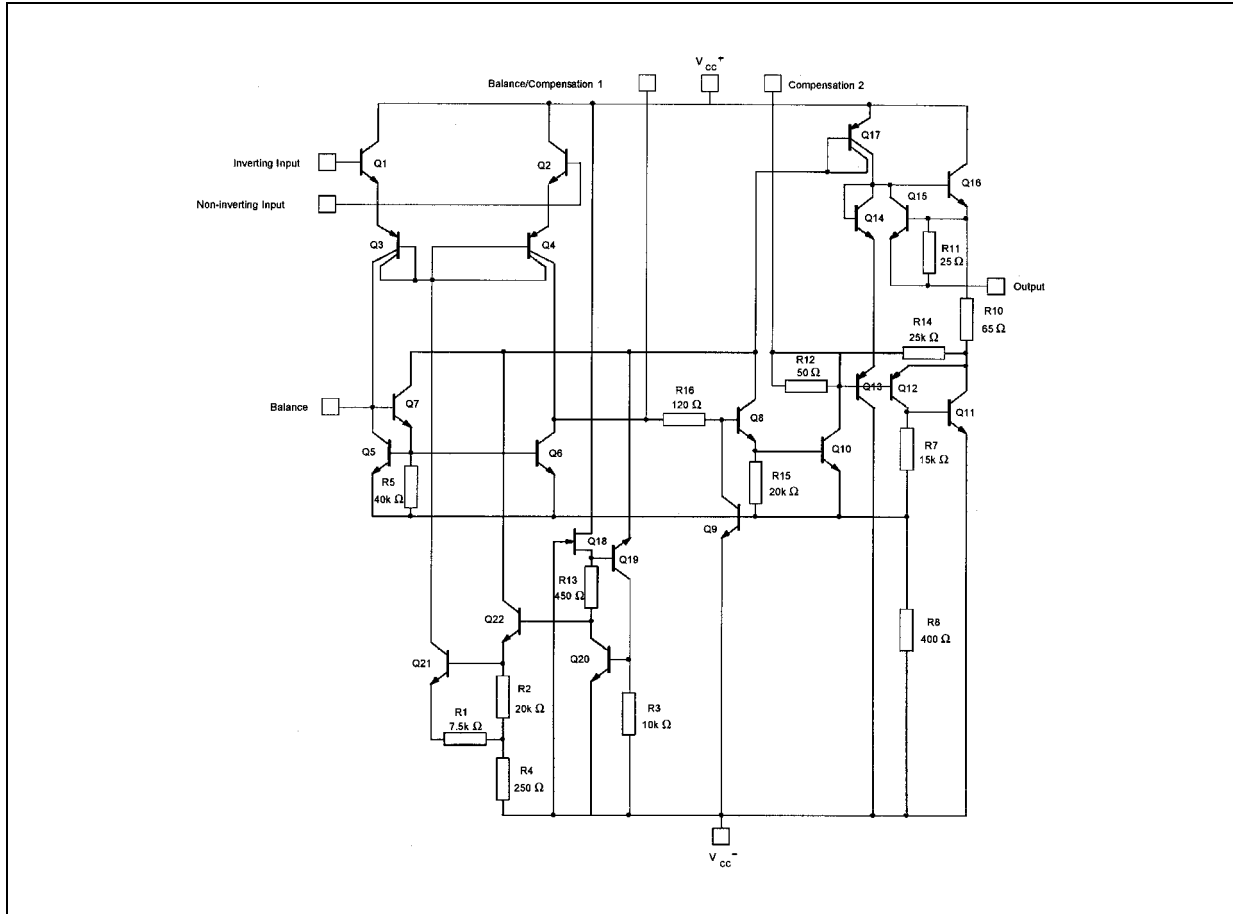


**ABSOLUTE MAXIMUM RATINGS**


| Symbol     | Parameter                            | UA748M      | UA748I      | UA748C   | Unit |
|------------|--------------------------------------|-------------|-------------|----------|------|
| $V_{CC}$   | Supply voltage                       |             | $\pm 22$    |          | V    |
| $V_{id}$   | Differential Input Voltage           |             | $\pm 30$    |          | V    |
| $V_i$      | Input Voltage                        |             | $\pm 15$    |          | V    |
| $P_{tot}$  | Power Dissipation <sup>1)</sup>      |             | 500         |          | mW   |
|            | Output Short-circuit Duration        |             | Infinite    |          |      |
| $T_{oper}$ | Operating Free-air Temperature Range | -55 to +125 | -40 to +105 | 0 to +70 | °C   |
| $T_{stg}$  | Storage Temperature Range            |             | -65 to +150 |          | °C   |

1. Power dissipation must be considered to ensure maximum junction temperature ( $T_j$ ) is not exceeded.




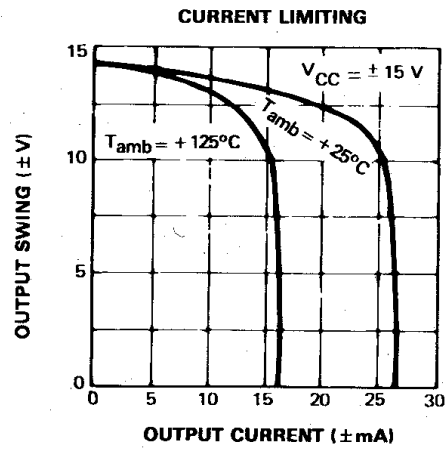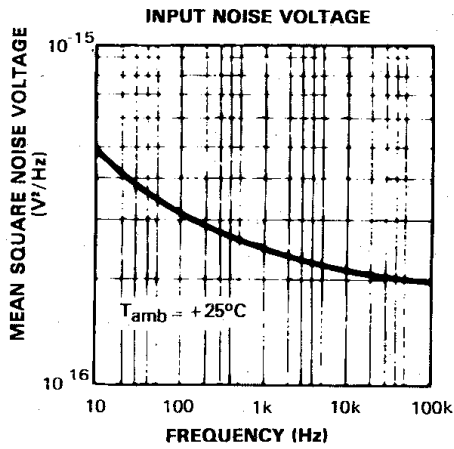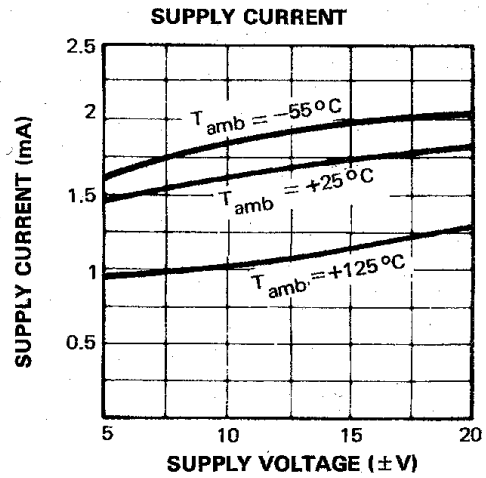
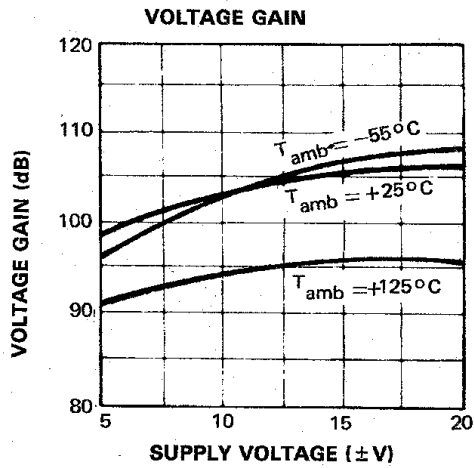


## SINGLE POLE COMPENSATION




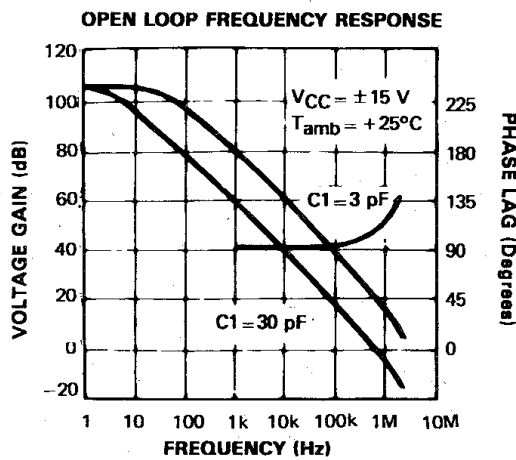


## FEED FORWARD COMPENSATION

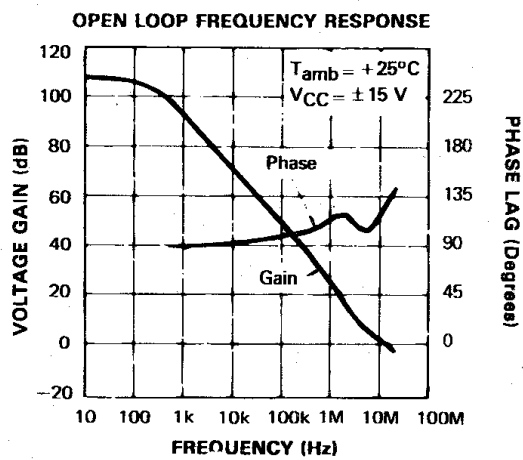


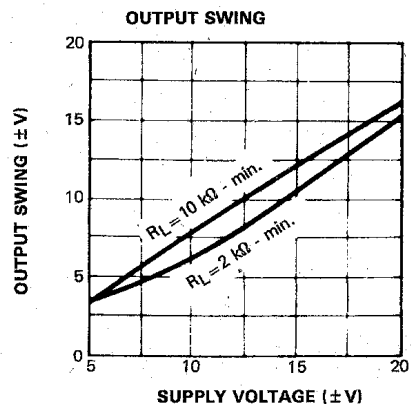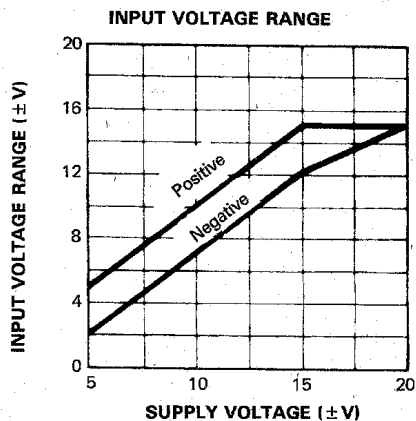

## SINGLE POLE COMPENSATION

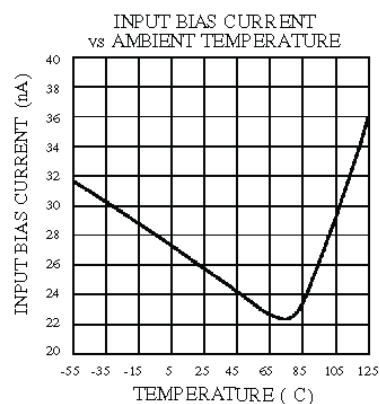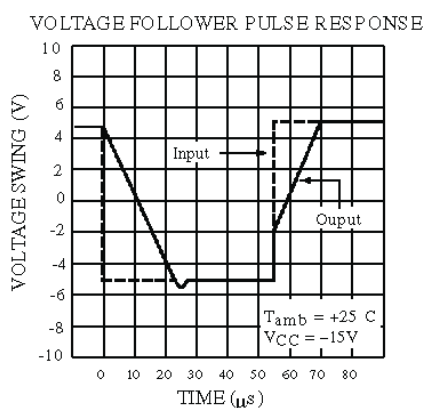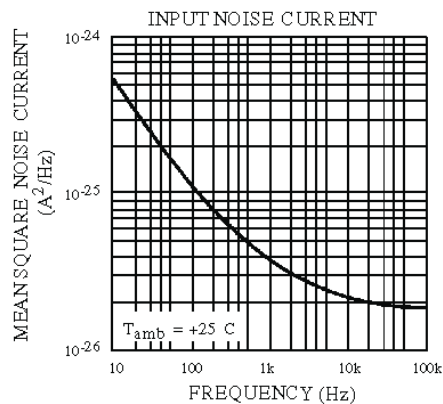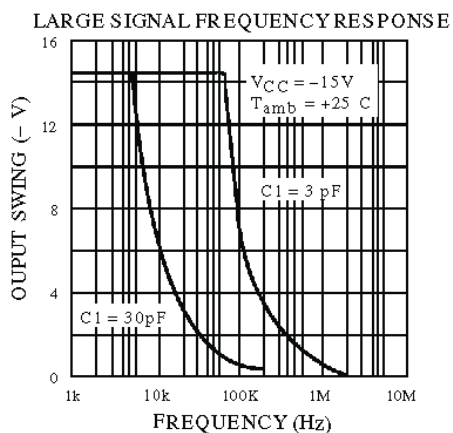


**PACKAGE MECHANICAL DATA**  
8 PINS - PLASTIC DIP

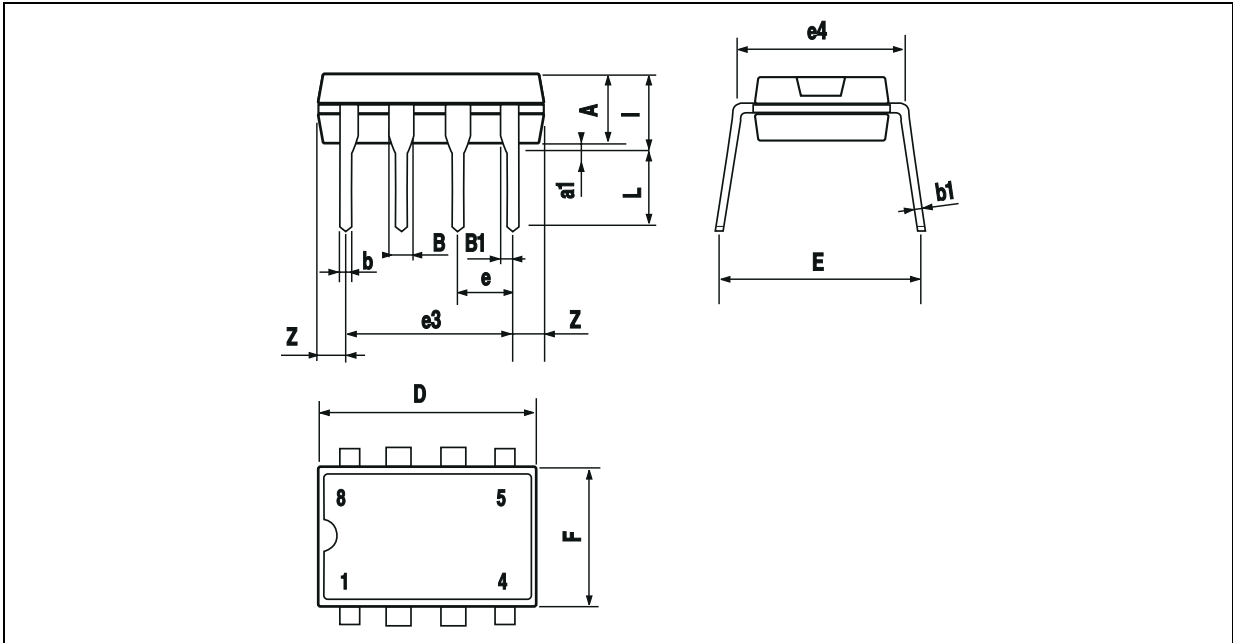

| Dim. | Millimeters |      |       | Inches |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    |             | 3.32 |       |        | 0.131 |       |
| a1   | 0.51        |      |       | 0.020  |       |       |
| B    | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b    | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1   | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D    |             |      | 10.92 |        |       | 0.430 |
| E    | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e    |             | 2.54 |       |        | 0.100 |       |
| e3   |             | 7.62 |       |        | 0.300 |       |
| e4   |             | 7.62 |       |        | 0.300 |       |
| F    |             |      | 6.6   |        |       | 0.260 |
| i    |             |      | 5.08  |        |       | 0.200 |
| L    | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z    |             |      | 1.52  |        |       | 0.060 |

**PACKAGE MECHANICAL DATA**  
8 PINS - PLASTIC MICROPACKAGE (SO)

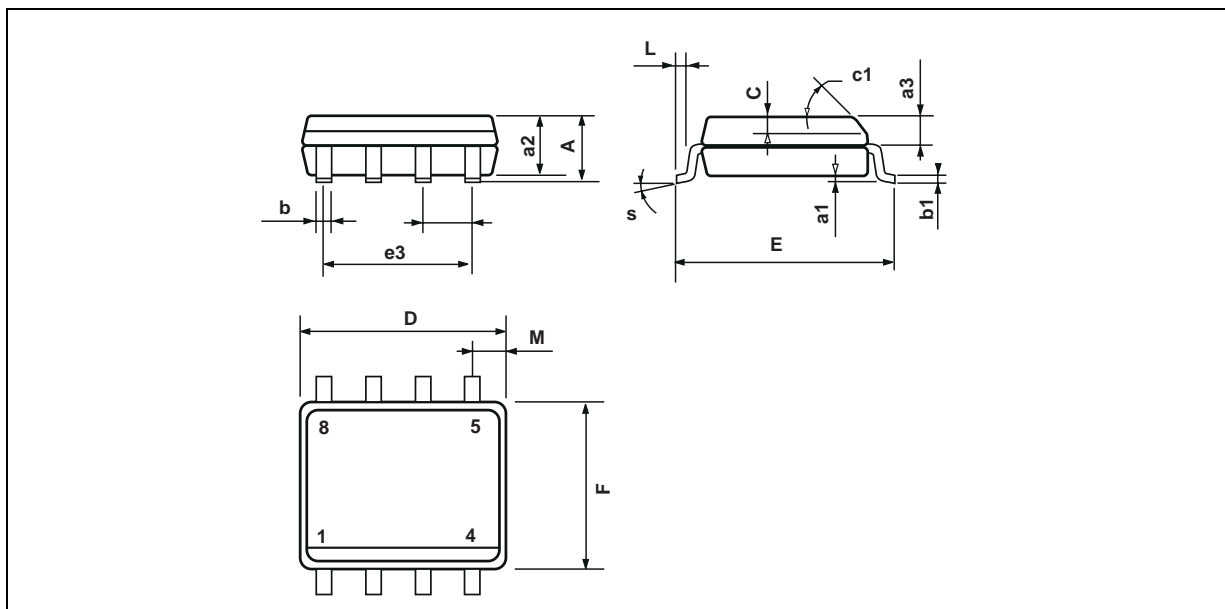

| Dim. | Millimeters |      |      | Inches |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.75 |        |       | 0.069 |
| a1   | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2   |             |      | 1.65 |        |       | 0.065 |
| a3   | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b    | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1   | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C    | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1   | 45° (typ.)  |      |      |        |       |       |
| D    | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E    | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e    |             | 1.27 |      |        | 0.050 |       |
| e3   |             | 3.81 |      |        | 0.150 |       |
| F    | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L    | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M    |             |      | 0.6  |        |       | 0.024 |
| S    | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>