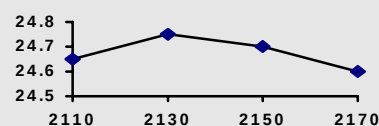
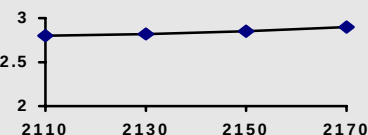
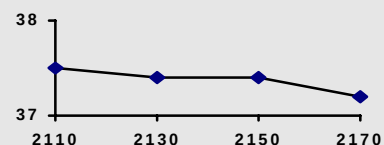
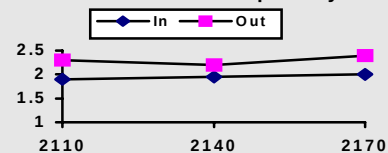
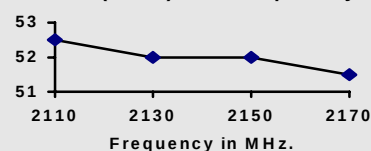


PA1223**2110-2170 MHz.****5 Watt
Amplifier****28v. GaAs Ultra Linear Power****tyco**
*Electronics***M/A-COM****Features (typical values)****High IP3** +51.0 dBm.**Low NF** 3.0 dB.**High Output Power** +37.5 dBm.**Low Cost**

Parameter	Typical Value	Min. Value	Max. Value	Units
Frequency		2110	2170	MHz.
Gain	25.0	23.0		dB.
Gain Flatness	+/- 0.3			dB.
Pout @ 1dB. comp.	37.5	36.0		dBm.
Noise Figure	3.0		4.0	dB.
ACPR (30kHz. BW)*	-47.0			dBc.
VSWR (Input/Output)	1.5:1/2:1		2:1/2.2:1	
IP3 (two tone)**	+51.0	+47.0		dBm.
Supply Required***	+28/1000		+28/1200	v./mA.

* $\pm 850\text{kHz}$ from fc at power level of 30dBm. (IS-95)

** IP3 measured with 2 tones @+24dBm. per tone @ 1 Mhz apart

*** A 10 microfarada capacitor is required from pin 3 (+V) to ground
Min and max values from 0 to 85 degrees C**Typical Performance @+ 25°C****Gain (dB) vs. Frequency****NF (dB) vs. Frequency****Pout (dBm) vs. Frequency****VSWR vs. Frequency****IP3 (dBm) vs. Frequency****Outline Drawings**

See Attached Document

Maximum Ratings

Storage Temperature -40°C to +125°C

DC Voltage +30 volts

RF Input Power +15 dBm.

Case Temperature +90°C

OUTLINE DRAWING

PIN	FUNCTION
1	RF IN
2	GND
3	+V
4	GND
5	RF OUT

