


# BAT42, BAT43

## Schottky Diodes


### DO-35

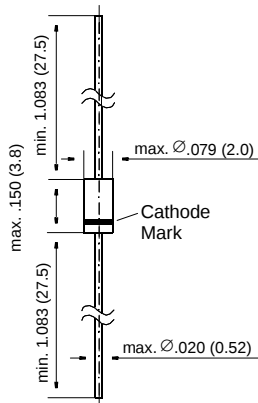

Dimensions in inches and (millimeters)

### FEATURES

- ◆ For general purpose applications
- ◆ These diodes feature very low turn-on voltage and fast switching. These devices are protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges.
- ◆ These diodes are also available in the SOD-123 case with the type designations BAT42W to BAT43W and in the MiniMELF case with type designations LL42 to LL43.



### MECHANICAL DATA

**Case:** DO-35 Glass Case

**Weight:** approx. 0.13 g

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

|                                                                                                   | Symbol    | Value             | Unit |
|---------------------------------------------------------------------------------------------------|-----------|-------------------|------|
| Repetitive Peak Reverse Voltage                                                                   | $V_{RRM}$ | 30                | V    |
| Forward Continuous Current at $T_{amb} = 25\text{ °C}$                                            | $I_F$     | 200 <sup>1)</sup> | mA   |
| Repetitive Peak Forward Current at $t_p < 1\text{ s}$ , $\delta < 0.5$ , $T_{amb} = 25\text{ °C}$ | $I_{FRM}$ | 500 <sup>1)</sup> | mA   |
| Surge Forward Current at $t_p < 10\text{ ms}$ , $T_{amb} = 25\text{ °C}$                          | $I_{FSM}$ | 4 <sup>1)</sup>   | A    |
| Power Dissipation <sup>1)</sup> at $T_{amb} = 65\text{ °C}$                                       | $P_{tot}$ | 200 <sup>1)</sup> | mW   |
| Junction Temperature                                                                              | $T_j$     | 125               | °C   |
| Ambient Operating Temperature Range                                                               | $T_{amb}$ | -65 to +125       | °C   |
| Storage Temperature Range                                                                         | $T_S$     | -65 to +150       | °C   |

<sup>1)</sup> Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

# BAT42, BAT43

## ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

|                                                                                                                                                                                                              | Symbol                                                                                        | Min.                     | Typ.                  | Max.                             | Unit                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------|-----------------------|----------------------------------|--------------------------------|
| Reverse Breakdown Voltage<br>tested with 100 $\mu$ A Pulses                                                                                                                                                  | $V_{(BR)R}$                                                                                   | 30                       | —                     | —                                | V                              |
| Forward Voltage<br>Pulse Test $t_p < 300 \mu s$ , $\delta < 2\%$<br>at $I_F = 200 \text{ mA}$<br>at $I_F = 10 \text{ mA}$<br>at $I_F = 50 \text{ mA}$<br>at $I_F = 2 \text{ mA}$<br>at $I_F = 15 \text{ mA}$ | $V_F$<br><b>BAT42</b> $V_F$<br><b>BAT42</b> $V_F$<br><b>BAT43</b> $V_F$<br><b>BAT43</b> $V_F$ | —<br>—<br>—<br>0.26<br>— | —<br>—<br>—<br>—<br>— | 1<br>0.4<br>0.65<br>0.33<br>0.45 | V<br>V<br>V<br>V<br>V          |
| Leakage Current<br>Pulse Test $t_p < 300 \mu s$ , $\delta < 2\%$<br>at $V_R = 25 \text{ V}$<br>at $V_R = 25 \text{ V}$ , $T_j = 100 \text{ }^\circ\text{C}$                                                  | $I_R$<br>$I_R$                                                                                | —<br>—                   | —<br>—                | 0.5<br>100                       | $\mu\text{A}$<br>$\mu\text{A}$ |
| Capacitance<br>at $V_R = 1 \text{ V}$ , $f = 1 \text{ MHz}$                                                                                                                                                  | $C_{tot}$                                                                                     | —                        | 7                     | —                                | pF                             |
| Reverse Recovery Time<br>from $I_F = 10 \text{ mA}$ through $I_R = 10 \text{ mA}$ to $I_R = 1 \text{ mA}$ ,<br>$R_L = 100 \Omega$                                                                            | $t_{rr}$                                                                                      | —                        | —                     | 5                                | ns                             |
| Detection Efficiency<br>at $R_L = 15 \text{ K}\Omega$ , $C_L = 300 \text{ pF}$ ,<br>$f = 45 \text{ MHz}$ , $V_{RF} = 2 \text{ V}$                                                                            | $\eta_v$                                                                                      | 80                       | —                     | —                                | %                              |
| Thermal Resistance Junction to Ambient Air                                                                                                                                                                   | $R_{thJA}$                                                                                    | —                        | —                     | 0.3 <sup>1)</sup>                | K/mW                           |
| <sup>1)</sup> Valid provided that leads at a distance of 4 mm from the case are kept at ambient temperature                                                                                                  |                                                                                               |                          |                       |                                  |                                |