


MBRF2035CT THRU MBRF2060CT

SCHOTTKY ISOLATED PLASTIC RECTIFIER

Reverse Voltage - 35 to 60 Volts Forward Current - 20.0 Amperes


ITO-220AB

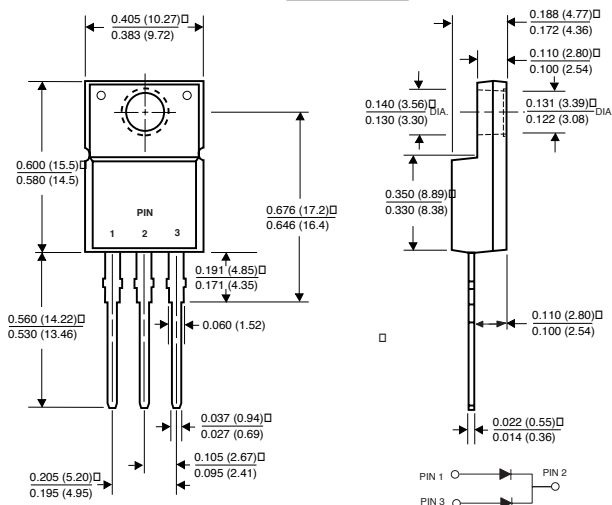

Dimensions in inches and (millimeters)

FEATURES

- ♦ Isolated plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ♦ Dual rectifier construction, positive center tap
- ♦ Metal silicon junction, majority carrier conduction
- ♦ Low power loss, high efficiency
- ♦ High current capability, low forward voltage drop
- ♦ High surge capability
- ♦ Guardring for overvoltage protection
- ♦ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ♦ High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case



MECHANICAL DATA

Case: ITO-220AB fully overmolded plastic body

Terminals: Leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 grams

Mounting Torque: 5 in. - lbs.max.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	MBRF2035CT	MBRF2045CT	MBRF2050CT	MBRF2060CT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	Volts
Maximum working peak reverse voltage	V _{RWM}	35	45	50	60	Volts
Maximum DC blocking voltage	V _{DC}	35	45	50	60	Volts
Maximum average forward rectified current at T _C =135°C	I _(AV)	20.0				Amps
Peak repetitive forward current per leg at T _C =135°C (rated V _R , sq. wave 2.0 KHz)	I _{FRM}	20.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0				Amps
Peak repetitive reverse surge current (NOTE 1)	I _{RRM}	1.0		0.5		Amps
Maximum instantaneous forward voltage per leg at I _F =10A, T _C =25°C I _F =10A, T _C =125°C (NOTE 2) I _F =20A, T _C =25°C I _F =20A, T _C =125°C	V _F	— 0.57 0.84 0.72		0.80 0.70 0.95 0.85		Volts
Maximum instantaneous reverse current at rated DC blocking voltage per leg T _C =25°C T _C =125°C	I _R	0.1 15.0		0.15 150.0		mA
Voltage rate of change, (rated V _R)	dv/dt	10,000				V/μs
Typical thermal resistance per leg (NOTE 3)	R _{θJC}	5.0				°C/W
Operating junction temperature range	T _J	-65 to +150				°C
Storage temperature range	T _{STG}	-65 to +175				°C
RMS Isolation voltage from terminals to heatsink with RH ≤ 30%	V _{ISOL}	4500 (NOTE 4) 3500 (NOTE 5) 1500 (NOTE 6)				Volts

NOTES: (1) 2.0 μs pulse width, $f=1.0\text{KHz}$

(2) Pulse test: 300 μs pulse width, 1% duty cycle

(3) Thermal resistance from junction to case per leg

(4) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset.

(5) Clip mounting (on case), where leads do overlap heatsink.

(6) Screw mounting with 4-40 screw, where washer diameter is $\leq 4.9\text{ mm}$ (0.19").

RATINGS AND CHARACTERISTIC CURVES MBRF2035CT THRU MBRF2060CT

FIG. 1 - FORWARD CURRENT DERATING CURVE

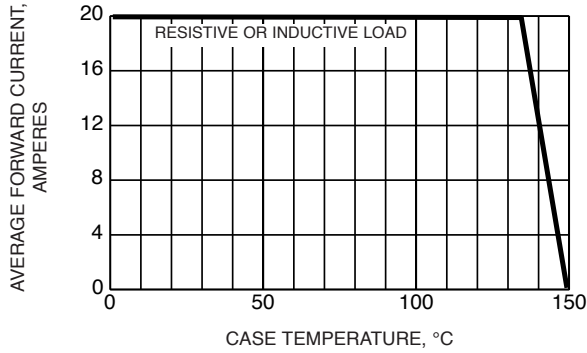


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

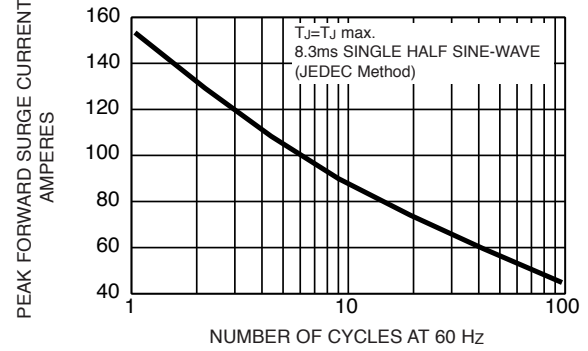


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

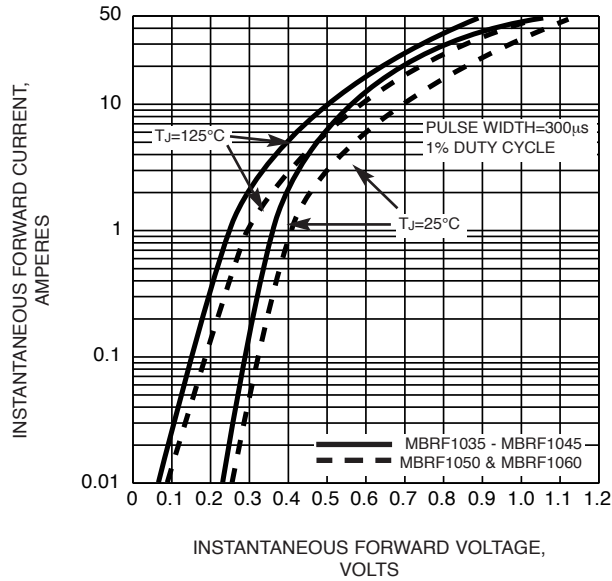


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

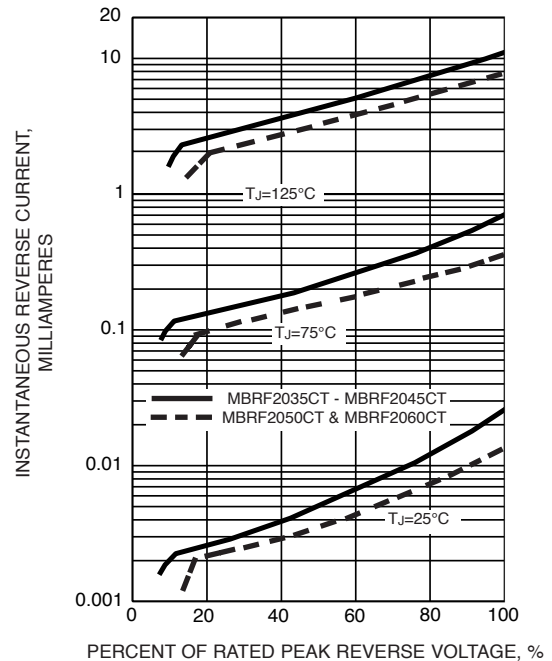


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

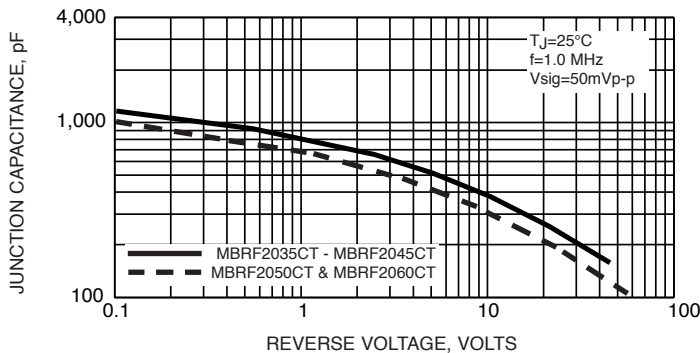


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

