



High Precision +2.5 Volt Reference

MX580

General Description

The MX580 is a high performance three-terminal voltage reference which provides a stable +2.5V source for 8, 10, and 12-bit data converters and analog functions. A temperature compensated internal band-gap operates from +4.5V to +30V and consumes only 1.5mA.

The reference can be connected directly to a number of CMOS A-to-D and D-to-A converters and is especially convenient in +5V powered systems. An initial untrimmed accuracy of 0.4% and temperature stability of 10ppm/°C allow adjustment-free designs in many precision applications.

Available packages include TO-52 metal cans for commercial and military temperature grades, as well as 8 lead small outline for commercial grade devices.

Applications

CMOS Data Conversion
Digital Panel Meters
Portable Instrumentation
Remote Measurement Systems
Logic Powered Analog Systems


Features

- ◆ 2.500V $\pm 0.4\%$ Accuracy (MX580L/M)
- ◆ 10ppm/°C Temperature Stability (MX580M)
- ◆ No Adjustments
- ◆ 250 μ V Long Term Stability
- ◆ 1.5mA Quiescent Current
- ◆ +4.5V to +30V Operation


Ordering Information

PART	TEMP. RANGE	PACKAGE	TOLERANCE
MX580JH	0°C to +70°C	TO-52 Can	± 75 mV
MX580KH	0°C to +70°C	TO-52 Can	± 25 mV
MX580LH	0°C to +70°C	TO-52 Can	± 10 mV
MX580MH	0°C to +70°C	TO-52 Can	± 10 mV
MX580JCSA	0°C to +70°C	8 Lead SO	± 75 mV
MX580KCSA	0°C to +70°C	8 Lead SO	± 25 mV
MX580LCSA	0°C to +70°C	8 Lead SO	± 10 mV
MX580JESA	-40°C to +85°C	8 Lead SO	± 75 mV
MX580KESA	-40°C to +85°C	8 Lead SO	± 25 mV
MX580SH	-55°C to +125°C	TO-52 Can	± 25 mV

Typical Application

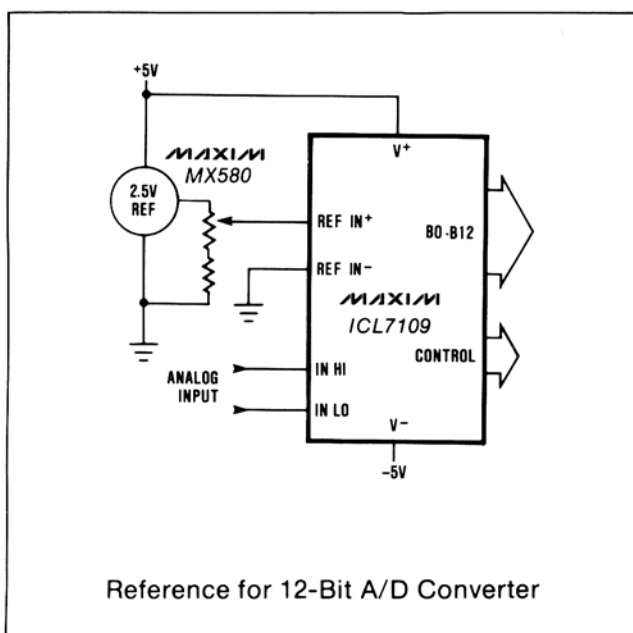

Pin Configurations

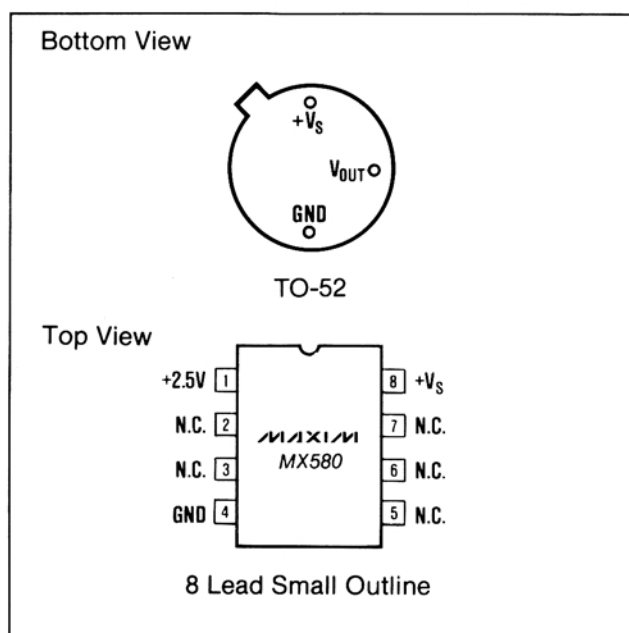

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

High Precision +2.5 Volt Reference

ABSOLUTE MAXIMUM RATINGS

Input Voltage V_{IN} to GND -0.3V, +40V
 Power Dissipation
 TO-52 Metal Can (Derate 2.8mW/°C above +25°C) . . 350mW
 Small Outline (Derate 5.3mW/°C above +75°C) . . . 400mW
 Output Short-Circuit Duration (Note 1) Indefinite
 Operating Temperature Range
 Commercial (J, K, L, M) 0°C to +70°C
 Military (S) -55°C to +125°C

Storage Temperature Range -65°C to +175°C
 Lead Temperature (Soldering 10sec) +300°C
 Thermal Resistance, Junction to Ambient
 TO-52 Metal Can +360°C/W
 Small Outline Package +170°C/W
 Junction to Case
 TO-52 Metal Can +100°C/W
 Small Outline Package +55°C/W

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{IN} = +15V$, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage Tolerance		$I_L = 0mA$ MX580J/S MX580K MX580L/M			±75 ±25 ±10	mV
Output Voltage Change with Temperature (Temperature Coefficient)		$T_A = 0^\circ C$ to $+70^\circ C$ MX580J MX580K MX580L MX580M			15 (85) 7 (40) 4.3 (25) 1.75 (10)	±mV (ppm/°C)
		$T_A = -40^\circ C$ to $+85^\circ C$ MX580J MX580K			20 (64) 12 (38)	
		$T_A = -55^\circ C$ to $+125^\circ C$ MX580S MX580 MX580			25 (55) 11 (25) 4.5 (10)	
Line Regulation		$I_L = 0mA$ $+4.5V < V_{IN} < +7V$ MX580J/S MX580K MX580L/M		0.3 0.3	3 2 1	mV
		$I_L = 0mA$, $+7V < V_{IN} < +30V$ MX580J/S MX580K MX580L/M		1.5 1.5	6 4 2	
Load Regulation		$I_L = 0mA$ to $10mA$			10	mV
Quiescent Supply Current	I_Q	$I_L = 0mA$		1.0	1.5	mA
Noise	e_{NP-P}	0.1Hz to 10Hz		60		µVp-p
Stability Long Term Per Month				250 25		µV

Note 1: Absolute maximum power dissipation must not be exceeded.

High Precision +2.5 Volt Reference

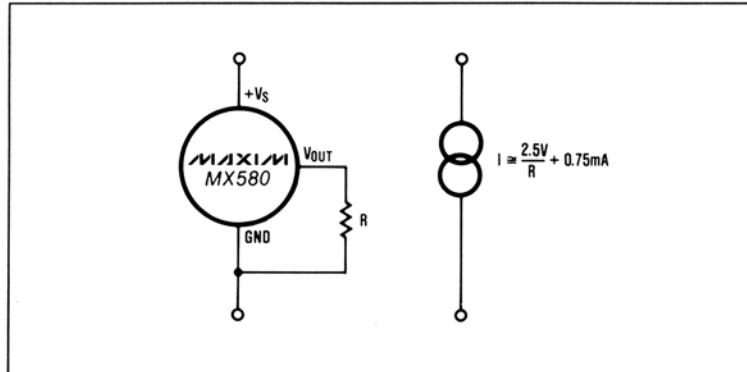



Figure 1. Two-Component Precision Current Limiter

MX580

High Precision +2.5 Volt Reference

Package Information



(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

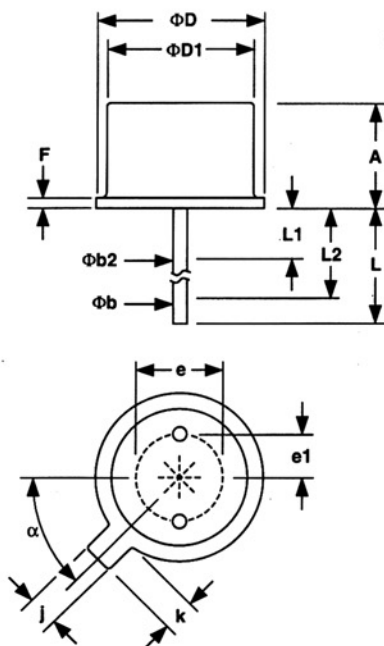


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.115	0.150	2.92	3.81
Φb	—	0.021	—	0.533
Φb2	0.016	0.019	0.406	0.483
ΦD	0.209	0.230	5.31	5.84
ΦD1	0.178	0.195	4.52	4.95
e	0.100		2.54	
e1	0.050		1.27	
F	—	0.030	—	0.762
j	0.036	0.046	0.914	1.17
k	0.028	0.048	0.711	1.22
L	0.500	—	12.70	—
L1	—	0.050	—	1.27
L2	0.250	—	6.35	—
α	45°		45°	

21-0020A

**2-PIN TO-52
PACKAGE**

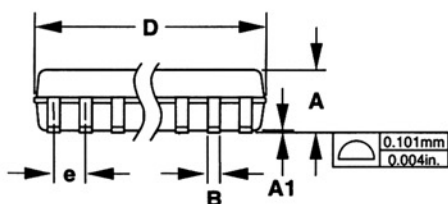

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
E	0.150	0.157	3.80	4.00
e	0.050		1.27	
H	0.228	0.244	5.80	6.20
L	0.016	0.050	0.40	1.27



**Narrow SO
SMALL-OUTLINE
PACKAGE
(0.150 in.)**

DIM	PINS	INCHES		MILLIMETERS	
		MIN	MAX	MIN	MAX
D	8	0.189	0.197	4.80	5.00
D	14	0.337	0.344	8.55	8.75
D	16	0.386	0.394	9.80	10.00

21-0041A

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**