


54/74 FAMILIES OF COMPATIBLE TTL CIRCUITS

PIN ASSIGNMENTS (TOP VIEWS)

512-BIT PROGRAMMABLE READ-ONLY MEMORIES

186 64 8-BIT WORDS
OPEN-COLLECTOR OUTPUTS

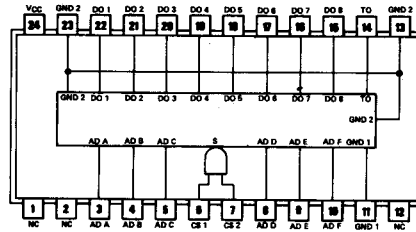


For more information contact the factory

~~SN54186 (J, W)~~ ~~SN74186 (J, N)~~
NC - No internal connection

1024-BIT READ-ONLY MEMORIES

187 256 4-BIT WORDS
OPEN-COLLECTOR OUTPUTS




For more information contact the factory

~~SN54187 (J, W)~~ ~~SN74187 (J, N)~~

256-BIT
188

SN54188
Not
Located




See Bi

dition.

~~SN54188 (J, W)~~ ~~SN74188 (J, N)~~
(Redesignated TBP188A030)

64-BIT
189



See Bipolar Microcomputer Components Data Book, second edition.

~~SN54189 (J, W)~~ ~~SN74189 (J, N)~~