


- **General-Purpose and PCI-X 1:4 Clock Buffer**
- **Operating Frequency: 0 MHz to 140 MHz**
- **Low Output Skew: <100 ps**
- **Distributes One Clock Input to One Bank of Four Outputs**
- **Output Enable Control That Drives Outputs Low When OE Is Low**
- **Operates From Single 3.3-V Supply**
- **8-Pin TSSOP Package**

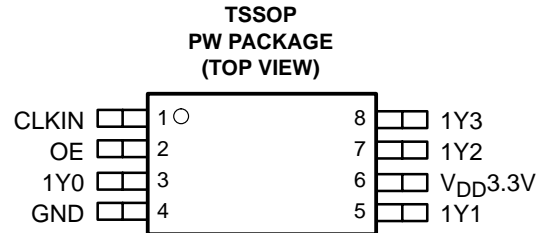

description


The CDCV304 is a high-performance, low-skew, general-purpose and PCI-X clock buffer. It distributes one input clock signal (CLKIN) to the output clocks (1Y[0:3]). It is specifically designed for use with PCI-X applications. The CDCV304 operates at 3.3 V.

The CDCV304 is characterized for operation from -40°C to 85°C for automotive and industrial applications.

FUNCTION TABLE

INPUTS		OUTPUT
CLKIN	OE	1Y (0:3)
L	L	L
H	L	L
L	H	L
H	H	H

functional block diagram

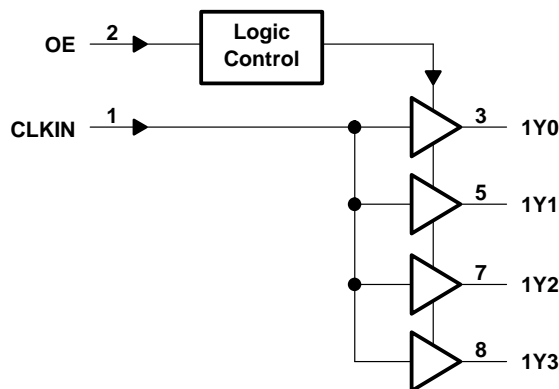

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2002, Texas Instruments Incorporated

CDCV304

140-MHz PCI-X CLOCK BUFFER

SCAS643B – SEPTEMBER 2000 REVISED JULY 2002

Terminal Functions

TERMINAL NAME	NO.	I/O	DESCRIPTION
1Y[0–3]	3, 5, 7, 8	O	Buffered output clocks
CLKIN	1	I	Input reference frequency
GND	4	Power	Ground
OE	2	I	Outputs enable control
V _{DD} 3.3V	6	Power	3.3-V supply

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage range, V _{DD}	–0.5 V to 4.3 V
Input voltage range, V _I (see Notes 1 and 2)	–0.5 V to V _{DD} + 0.5 V
Output voltage range, V _O (see Notes 1 and 2)	–0.5 V to V _{DD} + 0.5 V
Input clamp current, I _{IK} (V _I < 0 or V _I > V _{DD})	±50 mA
Output clamp current, I _{OK} (V _O < 0 or V _O > V _{DD})	±50 mA
Continuous total output current, I _O (V _O = 0 to V _{DD})	±50 mA
Package thermal impedance, θ _{JA} (see Note 3): PW package	230.5°C/W
Storage temperature range, T _{stg}	–65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
 2. This value is limited to 4.6 V maximum.
 3. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V _{DD}	3	3.3	3.6	V
High-level input voltage, V _{IH}	0.7×V _{DD}			V
Low-level input voltage, V _{IL}	0.3×V _{DD}			V
Input voltage, V _I	0		V _{DD}	V
High-level output current, I _{OH}			–24	mA
Low-level output current, I _{OL}			24	mA
Operating free-air temperature, T _A	–40		85	°C

timing requirements over recommended ranges of supply voltage and operating free-air temperature

	MIN	NOM	MAX	UNIT
f _{clk} Clock frequency	0		140	MHz



electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V _{IK}	Input voltage	V _{DD} = 3 V, I _I = -18 mA			-1.2	V
V _{OH}	High-level output voltage	V _{DD} = min to max, I _{OH} = -1 mA	V _{DD} -0.2			V
		V _{DD} = 3 V, I _{OH} = -24 mA	2			
		V _{DD} = 3 V, I _{OH} = -12 mA	2.4			
V _{OL}	Low-level output voltage	V _{DD} = min to max, I _{OL} = 1 mA	0.2			V
		V _{DD} = 3 V, I _{OL} = 24 mA	0.8			
		V _{DD} = 3 V, I _{OL} = 12 mA	0.55			
I _{OH}	High-level output current	V _{DD} = 3 V, V _O = 1 V	-50			mA
		V _{DD} = 3.3 V, V _O = 1.65 V	-55			
I _{OL}	Low-level output current	V _{DD} = 3 V, V _O = 2 V	60			mA
		V _{DD} = 3.3 V, V _O = 1.65 V	70			
I _I	Input current	V _I = V _O or V _{DD}			±5	μA
I _{DD}	Dynamic current, See Figure 5	f = 67 MHz			37	mA
C _i	Input capacitance	V _{DD} = 3.3 V, V _I = 0 V or V _{DD}		3		pF
C _o	Output capacitance	V _{DD} = 3.3 V, V _I = 0 V or V _{DD}		3.2		pF

† All typical values are at respective nominal V_{DD} and 25°C.

switching characteristics over recommended ranges of supply voltage and operating free-air temperature, C_L = 10 pF, V_{DD} = 3.3 V ± 0.3 V (see Note 6 and Figures 1 and 2)

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
t _{PLH}	High-to-low propagation delay	See Figures 1 and 2	1.8	2.5	3	ns
t _{PHL}	Low-to-high propagation delay		1.8	2.4	3	ns
t _{sk(o)}	Output skew (see Note 4)			50	100	ps
t _{sk(p)}	Pulse skew	V _{IH} = V _{DD} , V _{IL} = 0 V			150	ps
t _{sk(pr)}	Process skew			0.2	0.3	ns
t _{sk(pp)}	Part-to-part skew			0.25	0.4	ns
T _{high}	CLK high time, See Figure 4	66 MHz	6			ns
		140 MHz	3			
T _{low}	CLK low time, See Figure 4	66 MHz	6			ns
		140 MHz	3			
t _r	Output rise slew rate‡	0.2V _{DD} to 0.6V _{DD}	1.5	2.7	4	V/ns
t _f	Output fall slew rate‡	0.6V _{DD} to 0.2V _{DD}	1.5	2.7	4	V/ns

† All typical values are at respective nominal V_{DD}.

‡ This symbol is according to PCI-X terminology.

NOTE 4: The t_{sk(o)} specification is only valid for equal loading of all outputs.

PARAMETER MEASUREMENT INFORMATION

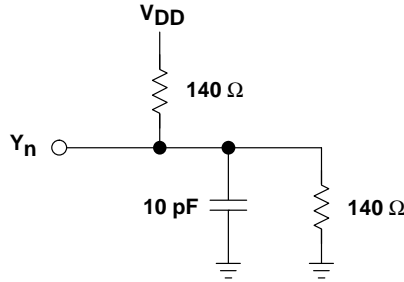


Figure 1. Test Load Circuit

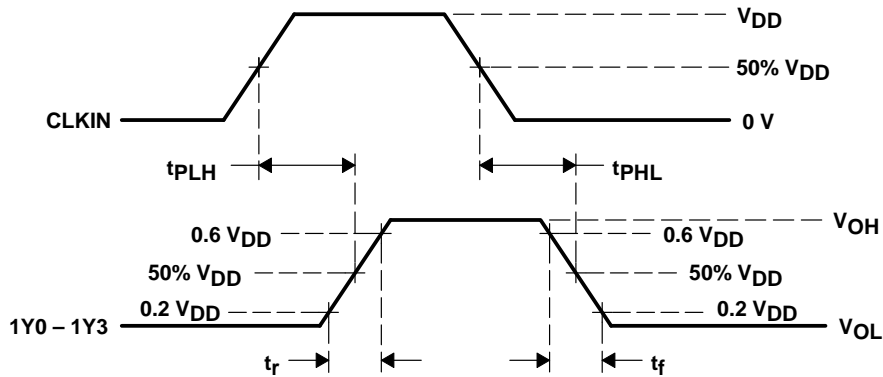


Figure 2. Voltage Thresholds for Propagation Delay (t_{pd}) Measurements


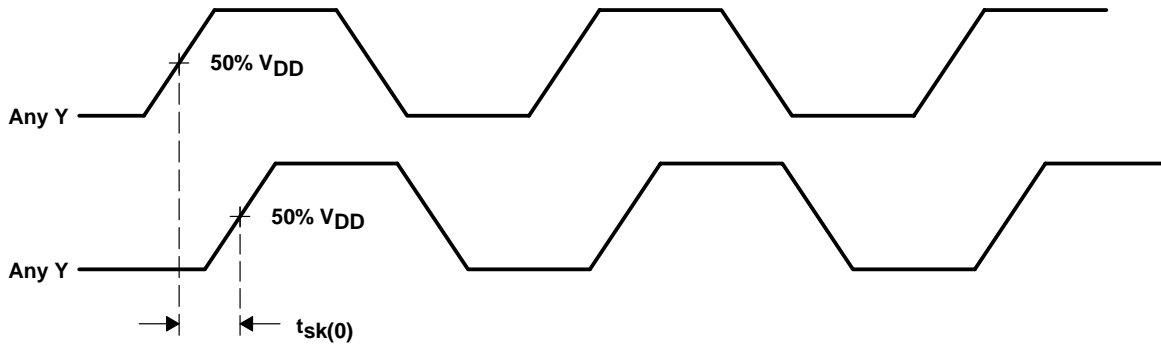


Figure 3. Output Skew

PARAMETER	VALUE	UNIT
$V_{IH}(\text{Min})$	$0.5 V_{DD}$	V
$V_{IL}(\text{Max})$	$0.35 V_{DD}$	V
V_{test}	$0.4 V_{DD}$	V

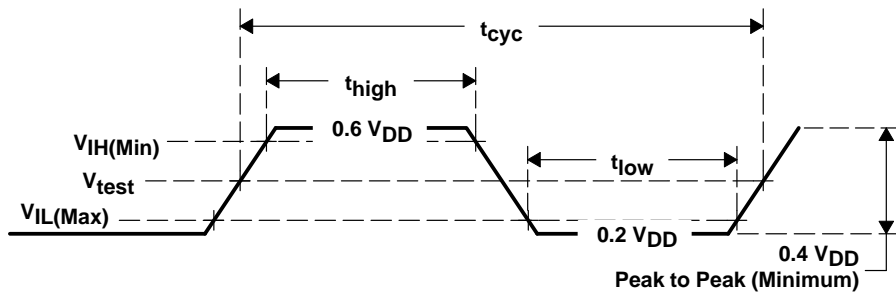

NOTE: All parameters in Figure 4 are according to PCI-X 1.0 specifications.

Figure 4. Clock Waveform

PARAMETER MEASUREMENT INFORMATION

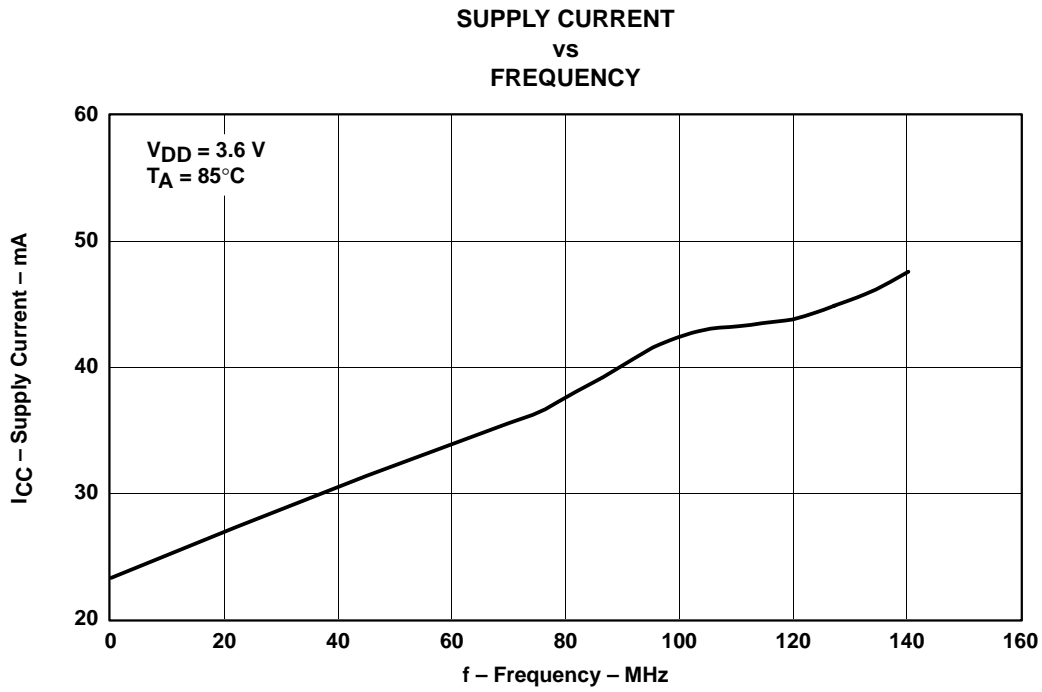


Figure 5

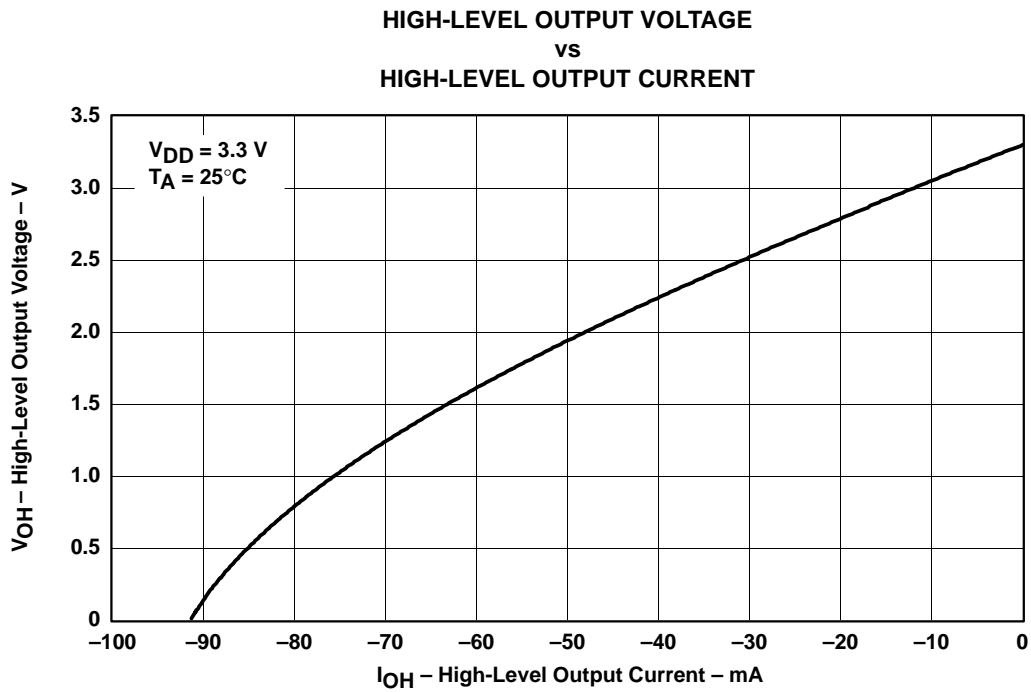


Figure 6

CDCV304 140-MHz PCI-X CLOCK BUFFER

SCAS643B – SEPTEMBER 2000 REVISED JULY 2002

PARAMETER MEASUREMENT INFORMATION

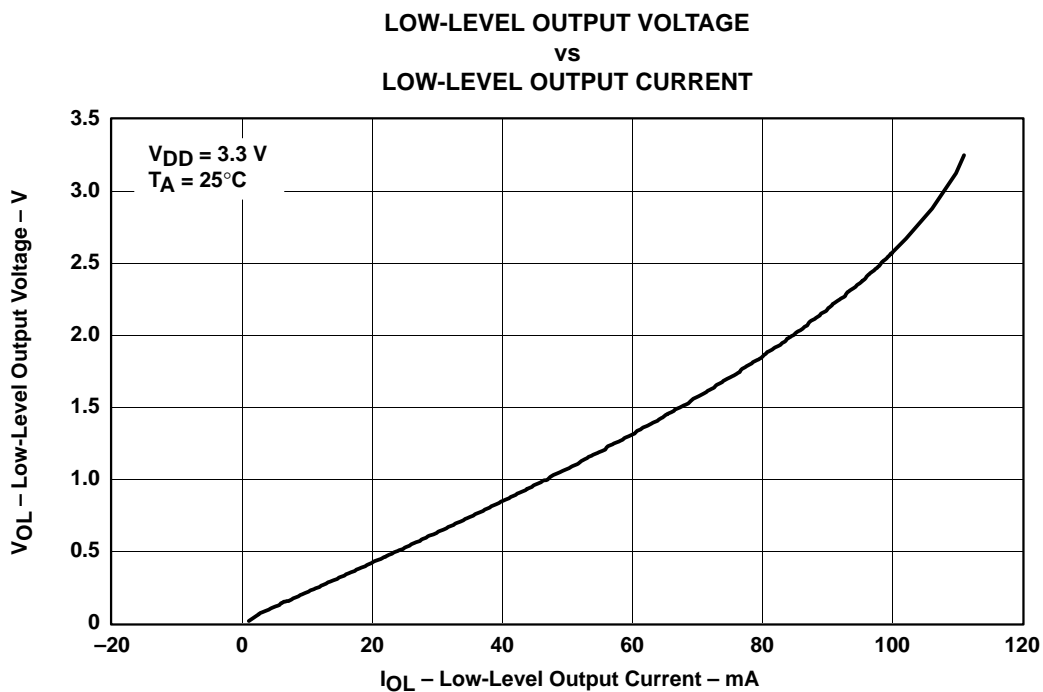



Figure 7

MECHANICAL DATA

PW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

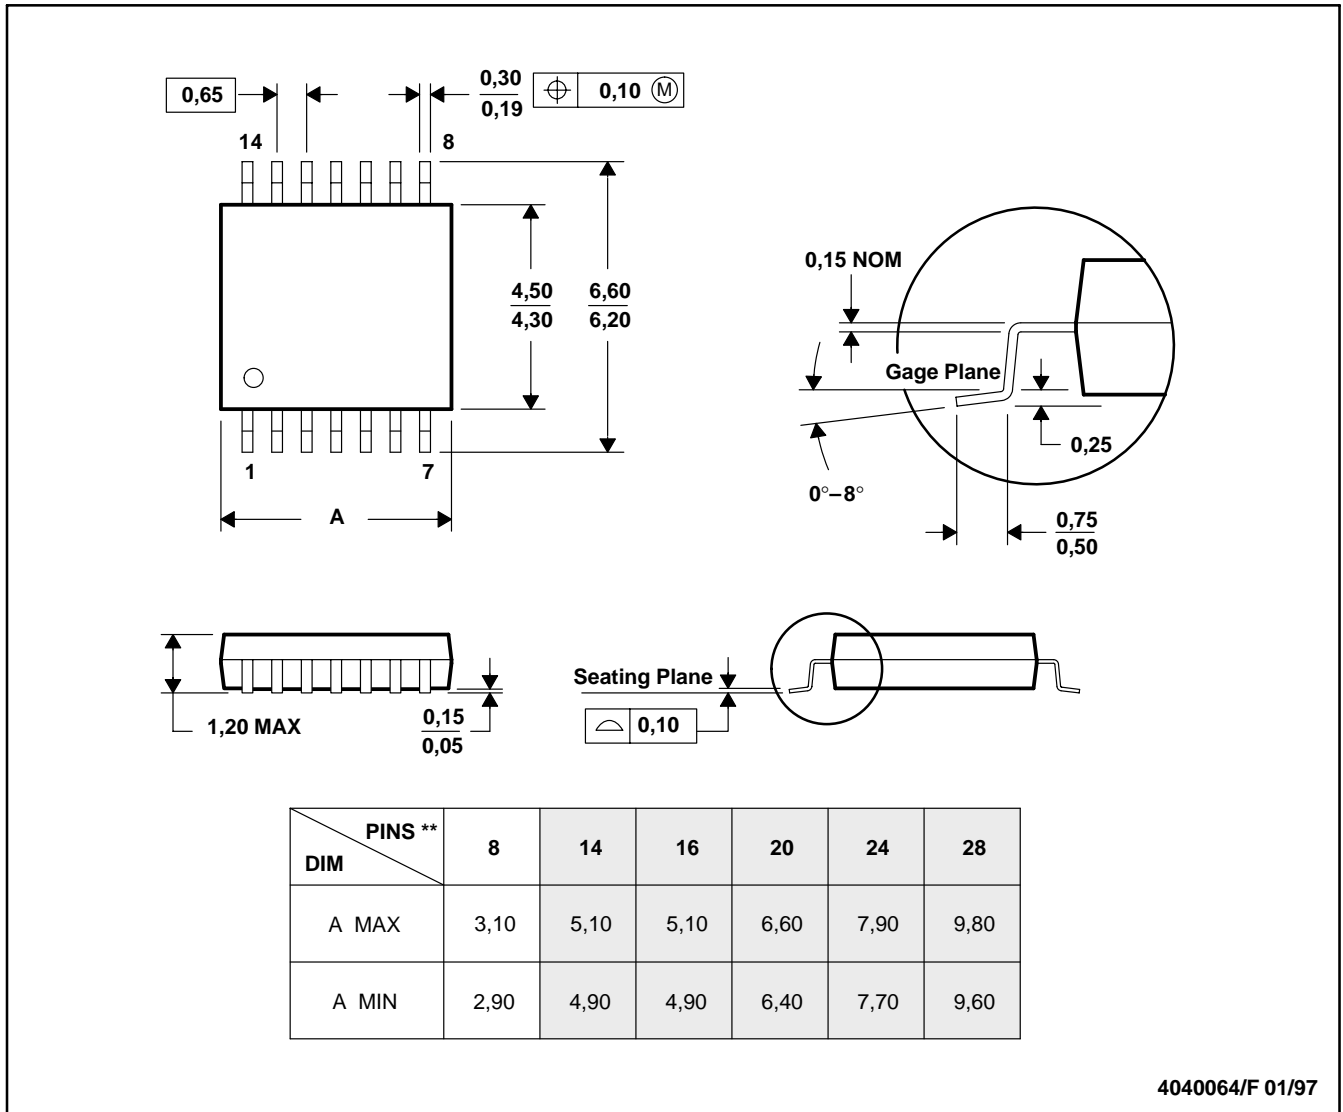

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265