



# RC4559 DUAL HIGH-PERFORMANCE OPERATIONAL AMPLIFIER

SLOS074 – D2785, OCTOBER 1983 — REVISED JUNE 1988

- **Matched Gain and Offset Between Amplifiers**
- **Unity-Gain Bandwidth . . . 3 MHz Min**
- **Slew Rate . . . 1.5 V/ns Min**
- **Low Equivalent Input Noise Voltage**  
2  $\mu$ V/Hz Max (20 Hz to 20 kHz)
- **No Frequency Compensation Required**
- **No Latch Up**
- **Wide Common-Mode Voltage Range**
- **Low Power Consumption**
- **Designed to be Interchangeable with Raytheon RC4559**

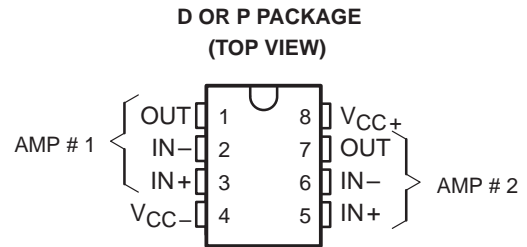

**symbol (each amplifier)**



### AVAILABLE OPTIONS

SYMBOLIZATION		OPERATING TEMPERATURE RANGE	$V_{IO}$ max at 25°C
DEVICE	PACKAGE SUFFIX		
RC4559	D, P	-0°C to 70°C	6 mV

The D packages are available taped and reeled. Add the suffix R to the device type when ordering. (i.e., RC4559DR)

### description

The RC4559 is a dual high-performance operational amplifier. The high common-mode input voltage and the absence of latch-up make this amplifier ideal for low-noise signal applications such as audio preamplifiers and signal conditioners. This amplifier features a guaranteed dynamic performance and output drive capability that far exceeds that of the general-purpose type amplifiers.

The RC4559 is characterized for operation from 0°C to 70°C.

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage $V_{CC+}$ (see Note 1)	18 V
Supply voltage $V_{CC-}$ (see Note 1)	-18 V
Differential input voltage (see Note 2)	$\pm 30$ V
Input voltage (any input, see Notes 1 and 3)	$\pm 15$ V
Duration of output short-circuit to ground, one amplifier at a time (see Note 4)	unlimited
Continuous total dissipation	500 mW
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 125°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
2. Differential voltages are at the noninverting input terminal with respect to the inverting input terminal.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
4. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

# RC4559

## DUAL HIGH-PERFORMANCE OPERATIONAL AMPLIFIER

electrical characteristics at specified free-air temperature,  $V_{CC+} = 15\text{ V}$ ,  $V_{CC-} = -15\text{ V}$

PARAMETER		TEST CONDITIONS†	$T_A$ ‡	MIN	TYP	MAX	UNIT
$V_{IO}$	Input offset voltage	$V_O = 0$	25°C		2	6	mV
			Full Range			7.5	
$I_{IO}$	Input offset current	$V_O = 0$	25°C		5	100	nA
			Full range			200	
$I_{IB}$	Input bias current	$V_O = 0$	25°C		40	250	nA
			Full range			500	
$V_I$	Input voltage range		25°C	±12	±13		V
$V_{OM}$	Maximum peak output voltage swing	$R_L \geq 3\text{ k}\Omega$	25°C	±12	±13		V
		$R_L = 600\ \Omega$	25°C	±9.5	±10		
		$R_L \geq 2\text{ k}\Omega$	Full range	±10			
$V_I$	Input voltage range	$V_O = \pm 10\text{ V}$ , $R_L = 2\text{ k}\Omega$	25°C	20	300		V/mV
			Full range	15			
$B_{OM}$	Maximum output-swing bandwidth	$V_{OPP} = 20\text{ V}$ , $R_L = 2\text{ k}\Omega$	25°C	24	32		kHz
$B_1$	Unity-gain bandwidth		25°C	3	4		MHz
$r_i$	Input resistance		25°C	0.3	1		M $\Omega$
CMRR	Common-mode rejection ratio	$V_O = 0$	25°C	80	100		dB
$k_{SVS}$	Supply voltage sensitivity ( $\Delta V_{IO}/\Delta V_{CC}$ )	$V_O = 0$	25°C		10	75	$\mu\text{V}/\text{V}$
$V_n$	Equivalent input noise voltage (closed loop)	$A_{VD} = 100$ , $R_S = 1\text{ k}\Omega$ , $f = 20\text{ Hz to } 20\text{ kHz}$	25°C		1.4	2	$\mu\text{V}$
$I_n$	Equivalent input noise current	$f = 20\text{ Hz to } 20\text{ kHz}$	25°C		25		pA
$I_{CC}$	Supply current (both amplifiers)	No load, No signal	25°C		3.3	5.6	mA
			0°C		4	6.6	
			70°C		3	5	
$V_{O1}/V_{O2}$	Crosstalk attenuation	$A_{VD} = 100$ , $R_S = 1\text{ k}\Omega$ , $f = 10\text{ kHz}$	25°C		90		dB

† All characteristics are specified under open-loop operation, unless otherwise noted.

‡ Full range operating free-air temperature range is 0°C to 70°C.

matching characteristics at  $V_{CC+} = 15\text{ V}$ ,  $V_{CC-} = -15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{IO}$	Input offset voltage	$V_O = 0$		±0.2		mV
$I_{IO}$	Input offset current	$V_O = 0$		±7.5		nA
$I_{IB}$	Input bias current	$V_O = 0$		±15		nA
$A_{VD}$	Large-signal differential voltage amplification	$V_O = \pm 10\text{ V}$ , $R_L = 2\text{ k}\Omega$		±1		dB

operating characteristics,  $V_{CC+} = 15\text{ V}$ ,  $V_{CC-} = -15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_r$	Rise time	$V_I = 20\text{ mV}$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$		80		$\mu\text{s}$
	Overshoot			18%		
SR	Slew rate at unity gain	$V_I = 10\text{ mV}$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$	1.5	2		V/ $\mu\text{s}$



## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

**CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.**

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.