


# TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003G – JUNE 1983 – REVISED MARCH 2001

- A-Suffix Versions Offer 5-mV  $V_{IO}$
- B-Suffix Versions Offer 2-mV  $V_{IO}$
- Wide Range of Supply Voltages  
1.4 V to 16 V
- True Single-Supply Operation
- Common-Mode Input Voltage Includes the Negative Rail
- Low Noise . . . 25 nV/ $\sqrt{\text{Hz}}$  Typ at  $f = 1 \text{ kHz}$   
(High-Bias Version)

D, N, OR PW PACKAGE  
(TOP VIEW)

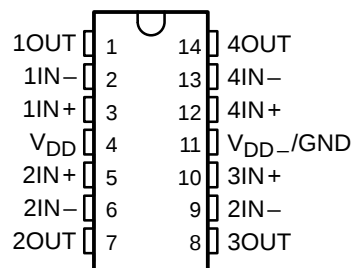

## description


The TLC254, TLC254A, TLC254B, TLC25L4, TLC254L4A, TLC254L4B, TLC25M4, TLC25M4A and TLC25M4B are low-cost, low-power quad operational amplifiers designed to operate with single or dual supplies. These devices utilize the Texas Instruments silicon gate LinCMOS™

process, giving them stable input-offset voltages that are available in selected grades of 2, 5, or 10 mV maximum, very high input impedances, and extremely low input offset and bias currents. Because the input common-mode range extends to the negative rail and the power consumption is extremely low, this series is ideally suited for battery-powered or energy-conserving applications. The series offers operation down to a 1.4-V supply, is stable at unity gain, and has excellent noise characteristics.

These devices have internal electrostatic-discharge (ESD) protection circuits that prevent catastrophic failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.1. However, care should be exercised in handling these devices as exposure to ESD may result in degradation of the device parametric performance.

Because of the extremely high input impedance and low input bias and offset currents, applications for these devices include many areas that have previously been limited to BIFET and NFET product types. Any circuit using high-impedance elements and requiring small offset errors is a good candidate for cost-effective use of these devices. Many features associated with bipolar technology are available with LinCMOS operational amplifiers without the power penalties of traditional bipolar devices.

## symbol (each amplifier)



Available options

| $T_A$       | $V_{IOmax}$<br>AT 25°C | PACKAGED DEVICES     |                    |               | CHIP FORM<br>(Y) |
|-------------|------------------------|----------------------|--------------------|---------------|------------------|
|             |                        | SMALL OUTLINE<br>(D) | PLASTIC DIP<br>(N) | TSSOP<br>(PW) |                  |
| 0°C to 70°C | 10 mV                  | TLC254CD             | TLC254CN           | TLC254CPW     | TLC254Y          |
|             | 5 mV                   | TLC254ACD            | TLC254ACN          | —             | —                |
|             | 2 mV                   | TLC254BCD            | TLC254BCN          | —             | —                |
|             | 10 mV                  | TLC25L4CD            | TLC25L4CN          | TLC25L4CPW    | TLC25L4Y         |
|             | 5 mV                   | TLC25L4ACD           | TLC25L4ACN         | —             | —                |
|             | 2 mV                   | TLC25L2BCD           | TLC25L4BCN         | —             | —                |
|             | 10 mV                  | TLC25M4CD            | TLC25M4CN          | TLC25M4CPW    | TLC25M4Y         |
|             | 5 mV                   | TLC25M4ACD           | TLC25M4ACN         | —             | —                |
|             | 2 mV                   | TLC25M4BCD           | TLC25M4BCN         | —             | —                |

The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC254CDR). Chips are tested at 25°C.

LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003G – JUNE 1983 – REVISED MARCH 2001

description (continued)


General applications such as transducer interfacing, analog calculations, amplifier blocks, active filters, and signal buffering are all easily designed with these devices. Remote and inaccessible equipment applications are possible using their low-voltage and low-power capabilities. These devices are well suited to solve the difficult problems associated with single-battery and solar-cell-powered applications. This series includes devices that are characterized for the commercial temperature range and are available in 14-pin plastic dip and the small-outline packages. The device is also available in chip form.

These devices are characterized for operation from 0°C to 70°C.

| DEVICE FEATURES                              |                         |                            |                         |
|----------------------------------------------|-------------------------|----------------------------|-------------------------|
| PARAMETER                                    | TLC25L4_C<br>(LOW BIAS) | TLC25M4_C<br>(MEDIUM BIAS) | TLC254_C<br>(HIGH BIAS) |
| Supply current (Typ)                         | 40 µA                   | 600 µA                     | 4000 µA                 |
| Slew rate (Typ)                              | 0.04 V/µA               | 0.6 V/µA                   | 4.5 V/µA                |
| Input offset voltage (Max)                   |                         |                            |                         |
| TLC254C, TLC25L4C, TLC25M4C                  | 10 mV                   | 10 mV                      | 10 mV                   |
| TLC254AC, TLC25L4AC, TLC25M4AC               | 5 mV                    | 5 mV                       | 5 mV                    |
| TLC254BC, TLC25L4BC, TLC25M4BC               | 2 mV                    | 2 mV                       | 2 mV                    |
| Offset voltage drift (Typ)                   | 0.1 µV/month†           | 0.1 µV/month†              | 0.1 µV/month†           |
| Offset voltage temperature coefficient (Typ) | 0.7 µV/°C               | 2 µV/°C                    | 5 µV/°C                 |
| Input bias current (Typ)                     | 1 pA                    | 1 pA                       | 1 pA                    |
| Input offset current (Typ)                   | 1 pA                    | 1 pA                       | 1 pA                    |

† The long-term drift value applies after the first month.

equivalent schematic (each amplifier)

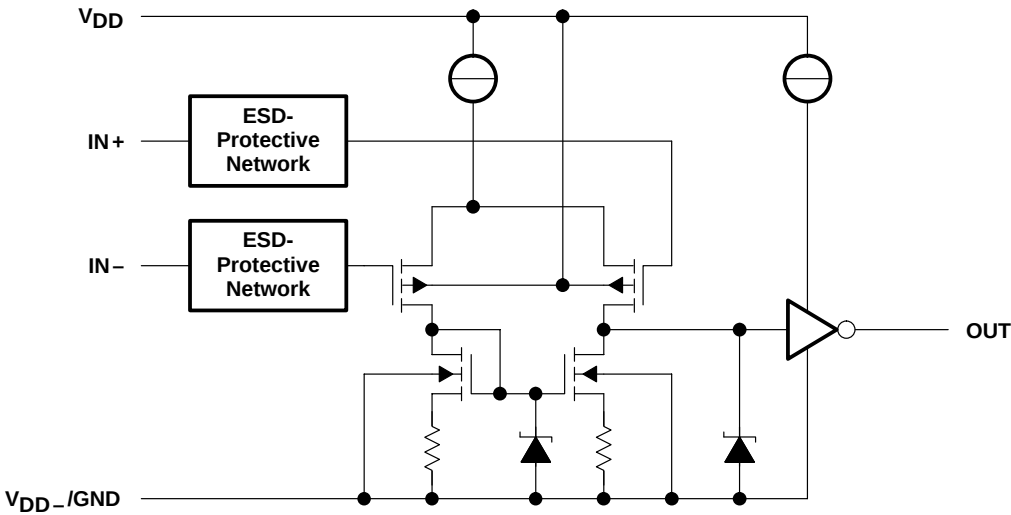


**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

## chip information

These chips, when properly assembled, display characteristics similar to the TLC25\_4C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

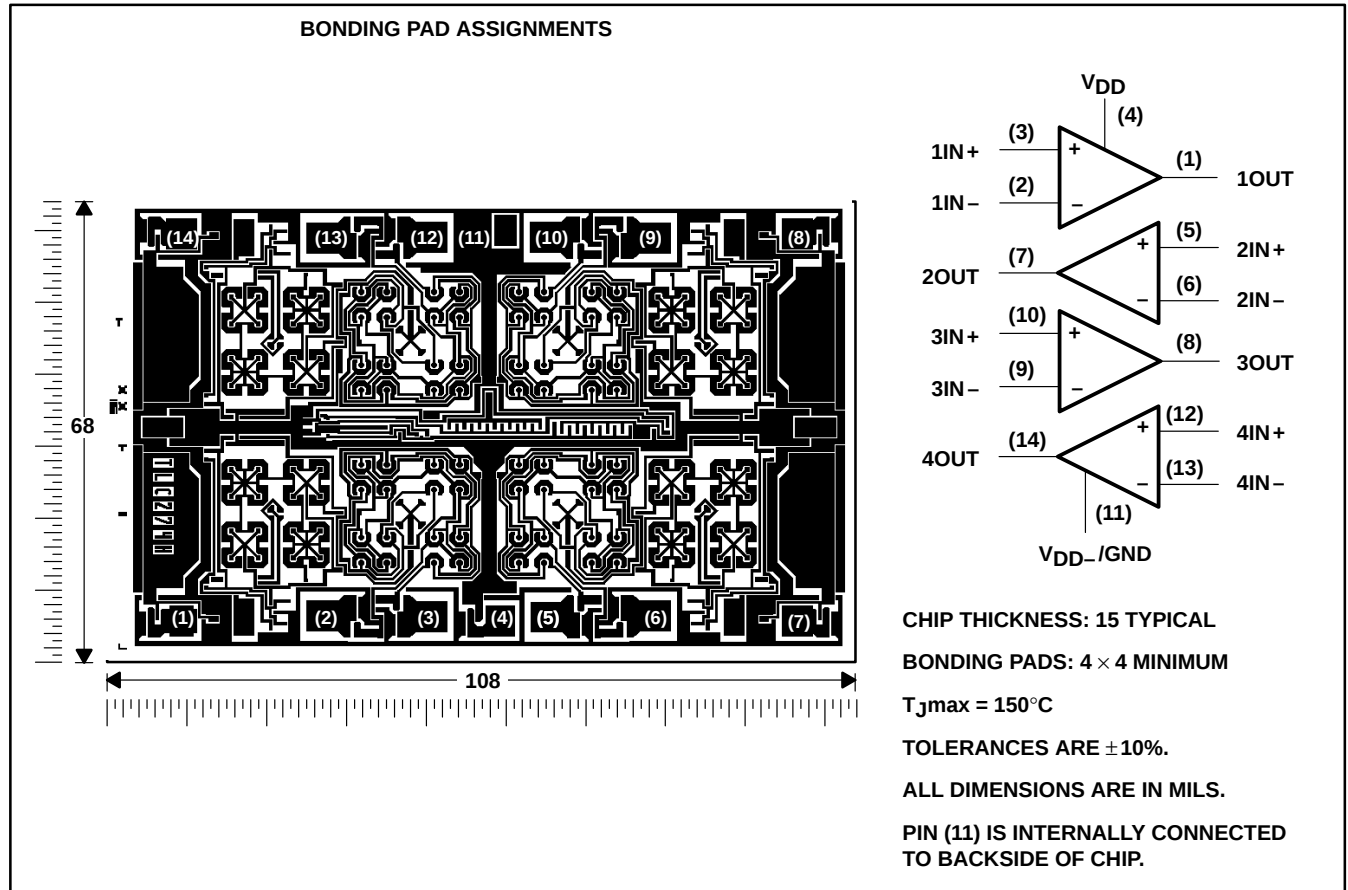

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                                |                              |
|--------------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                                          | 18 V                         |
| Differential input voltage (see Note 2)                                        | $\pm 18$ V                   |
| Input voltage range (any input)                                                | –0.3 V to 18 V               |
| Duration of short-circuit at (or below) 25°C free-air temperature (see Note 3) | unlimited                    |
| Continuous total dissipation                                                   | See Dissipation Rating Table |
| Operating free-air temperature range                                           | 0°C to 70°C                  |
| Storage temperature range                                                      | –65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds                   | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to  $V_{DD-}/GND$ .  
2. Differential voltages are at  $IN+$ , with respect to  $IN-$ .  
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

**DISSIPATION RATING TABLE**

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   |
| N       | 1050 mW                                     | 9.2 mW/°C                                         | 736 mW                                   |
| PW      | 700 mW                                      | 5.6 mW/°C                                         | 448 mW                                   |

**recommended operating conditions**

|                                       |                  | MIN  | MAX | UNIT |
|---------------------------------------|------------------|------|-----|------|
| Supply voltage, $V_{DD}$              |                  | 1.4  | 16  | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD} = 1.4$ V | 0    | 0.2 | V    |
|                                       | $V_{DD} = 5$ V   | –0.2 | 4   |      |
|                                       | $V_{DD} = 10$ V  | –0.2 | 9   |      |
|                                       | $V_{DD} = 16$ V  | –0.2 | 14  |      |
| Operating free-air temperature, $T_A$ |                  | 0    | 70  | °C   |



electrical characteristics at specified free-air temperature,  $V_{DD} = 1.4\text{ V}$  (unless otherwise noted)

| PARAMETER        |                                                         | TEST CONDITIONS†                                               | T <sub>A</sub> | TLC254_C |     |     | TLC25L4_C |     |     | TLC25M4_C |     |     | UNIT  |
|------------------|---------------------------------------------------------|----------------------------------------------------------------|----------------|----------|-----|-----|-----------|-----|-----|-----------|-----|-----|-------|
|                  |                                                         |                                                                |                | MIN      | TYP | MAX | MIN       | TYP | MAX | MIN       | TYP | MAX |       |
| V <sub>IO</sub>  | Input offset voltage                                    | V <sub>O</sub> = 0.2 V, R <sub>S</sub> = 50 Ω                  | 25°C           | 10       |     |     | 10        |     |     | 10        |     |     | mV    |
|                  |                                                         |                                                                | 0°C to 70°C    | 12       |     |     | 12        |     |     | 12        |     |     |       |
|                  |                                                         |                                                                | 25°C           | 5        |     |     | 5         |     |     | 5         |     |     |       |
|                  |                                                         |                                                                | 0°C to 70°C    | 6.5      |     |     | 6.5       |     |     | 6.5       |     |     |       |
|                  |                                                         |                                                                | 25°C           | 2        |     |     | 2         |     |     | 2         |     |     |       |
|                  |                                                         |                                                                | 0°C to 70°C    | 3        |     |     | 3         |     |     | 3         |     |     |       |
| a <sub>VIO</sub> | Average temperature coefficient of input offset voltage |                                                                | 25°C to 70°C   | 1        |     |     | 1         |     |     | 1         |     |     | μV/°C |
| I <sub>IO</sub>  | Input offset current                                    | V <sub>O</sub> = 0.2 V                                         | 25°C           | 1        | 60  | 1   | 60        | 1   | 60  | pA        |     |     |       |
|                  |                                                         |                                                                | 0°C to 70°C    | 300      |     |     | 300       |     |     | 300       |     |     |       |
| I <sub>IB</sub>  | Input bias current                                      | V <sub>O</sub> = 0.2 V                                         | 25°C           | 1        | 60  | 1   | 60        | 1   | 60  | pA        |     |     |       |
|                  |                                                         |                                                                | 0°C to 70°C    | 600      |     |     | 600       |     |     | 600       |     |     |       |
| V <sub>ICR</sub> | Common-mode input voltage range                         |                                                                | 25°C           | 0 to 0.2 |     |     | 0 to 0.2  |     |     | 0 to 0.2  |     |     | V     |
| V <sub>OM</sub>  | Peak output voltage swing‡                              | V <sub>ID</sub> = 100 mV                                       | 25°C           | 450      | 700 | 450 | 700       | 450 | 700 | mV        |     |     |       |
| A <sub>VD</sub>  | Large-signal differential voltage amplification         | V <sub>O</sub> = 100 to 300 mV, R <sub>S</sub> = 50 Ω          | 25°C           | 10       |     |     | 20        |     |     | 20        |     |     | V/mV  |
| CMRR             | Common-mode rejection ratio                             | V <sub>O</sub> = 0.2 V, V <sub>IC</sub> = V <sub>ICR</sub> min | 25°C           | 60       | 77  | 60  | 77        | 60  | 77  | dB        |     |     |       |
| I <sub>DD</sub>  | Supply current                                          | V <sub>O</sub> = 0.2 V, No load                                | 25°C           | 600 750  |     |     | 50 68     |     |     | 400 500   |     |     | μA    |

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Unless otherwise noted, an output load resistor is connected from the output to ground and has the following value: for low bias,  $R_L = 1\text{ M}\Omega$ , for medium bias  $R_L = 100\text{ k}\Omega$ , and for high bias  $R_L = 10\text{ k}\Omega$ .

‡ The output swings to the potential of  $V_{DD-}/\text{GND}$ .

operating characteristics,  $V_{DD} = 1.4\text{ V}, T_A = 25^\circ\text{C}$

| PARAMETER |                         | TEST CONDITIONS                                                                  | TLC254_C |     |     | TLC25L4_C |     |       | TLC25M4_C |     |      | UNIT             |
|-----------|-------------------------|----------------------------------------------------------------------------------|----------|-----|-----|-----------|-----|-------|-----------|-----|------|------------------|
|           |                         |                                                                                  | MIN      | TYP | MAX | MIN       | TYP | MAX   | MIN       | TYP | MAX  |                  |
| SR        | Slew rate at unity gain | See Figure 1                                                                     |          |     | 0.1 |           |     | 0.001 |           |     | 0.01 | V/ $\mu\text{s}$ |
| $B_1$     | Unity-gain bandwidth    | $A_V = 40\text{ dB}, R_S = 50\ \Omega, C_L = 10\text{ pF}, \text{ See Figure 1}$ |          |     | 12  |           |     | 12    |           |     | 12   | kHz              |
|           | Overshoot factor        | See Figure 1                                                                     |          |     | 30% |           |     | 35%   |           |     | 35%  |                  |

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  |          | TEST CONDITIONS                              |                                             | $T_A^\dagger$ | TLC254, TLC254AC,<br>TLC254BC |             |     | UNIT                         |
|----------------------------------------------------------------------------|----------|----------------------------------------------|---------------------------------------------|---------------|-------------------------------|-------------|-----|------------------------------|
|                                                                            |          |                                              |                                             |               | MIN                           | TYP         | MAX |                              |
| $V_{IO}$ Input offset voltage                                              | TLC254C  | $V_O = 1.4\text{ V}$ ,<br>$R_S = 50\ \Omega$ | $V_{IC} = 0$ ,<br>$R_L = 10\text{ k}\Omega$ | 25°C          |                               | 1.1         | 10  | mV                           |
|                                                                            |          |                                              |                                             | Full range    |                               |             | 12  |                              |
|                                                                            | TLC254AC | $V_O = 1.4\text{ V}$ ,<br>$R_S = 50\ \Omega$ | $V_{IC} = 0$ ,<br>$R_L = 10\text{ k}\Omega$ | 25°C          |                               | 0.9         | 5   |                              |
|                                                                            |          |                                              |                                             | Full range    |                               |             | 6.5 |                              |
|                                                                            | TLC254BC | $V_O = 1.4\text{ V}$ ,<br>$R_S = 50\ \Omega$ | $V_{IC} = 0$ ,<br>$R_L = 10\text{ k}\Omega$ | 25°C          |                               | 0.34        | 2   |                              |
|                                                                            |          |                                              |                                             | Full range    |                               |             | 3   |                              |
| $\alpha_{VIO}$ Average temperature coefficient of input offset voltage     |          |                                              |                                             | 25°C to 70°C  |                               | 1.8         |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current (see Note 4)                                 |          | $V_O = 2.5\text{ V}$                         | $V_{IC} = 2.5\text{ V}$                     | 25°C          |                               | 0.1         | 60  | pA                           |
|                                                                            |          |                                              |                                             | 70°C          |                               | 7           | 300 |                              |
| $I_{IB}$ Input bias current (see Note 4)                                   |          | $V_O = 2.5\text{ V}$                         | $V_{IC} = 2.5\text{ V}$                     | 25°C          |                               | 0.6         | 60  | pA                           |
|                                                                            |          |                                              |                                             | 70°C          |                               | 40          | 600 |                              |
| $V_{ICR}$ Common-mode input voltage range (see Note 5)                     |          |                                              |                                             | 25°C          | -0.2 to 4                     | -0.3 to 4.2 |     | V                            |
|                                                                            |          |                                              |                                             | Full range    | -0.2 to 3.5                   |             |     |                              |
| $V_{OH}$ High-level output voltage                                         |          | $V_{ID} = 100\text{ mV}$                     | $R_L = 10\text{ k}\Omega$                   | 0°C           |                               | 3           | 3.8 | V                            |
|                                                                            |          |                                              |                                             | 25°C          |                               | 3.2         | 3.8 |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 3           | 3.8 |                              |
| $V_{OL}$ Low-level output voltage                                          |          | $V_{ID} = -100\text{ mV}$                    | $I_{OL} = 0$                                | 0°C           |                               | 0           | 50  | mV                           |
|                                                                            |          |                                              |                                             | 25°C          |                               | 0           | 50  |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 0           | 50  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   |          | $V_O = 0.25\text{ V to } 2\text{ V}$         | $R_L = 10\text{ k}\Omega$                   | 0°C           |                               | 4           | 27  | V/mV                         |
|                                                                            |          |                                              |                                             | 25°C          |                               | 5           | 23  |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 4           | 20  |                              |
| CMRR Common-mode rejection ratio                                           |          | $V_{IC} = V_{ICRmin}$                        |                                             | 0°C           |                               | 60          | 84  | dB                           |
|                                                                            |          |                                              |                                             | 25°C          |                               | 65          | 80  |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 60          | 85  |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) |          | $V_{DD} = 5\text{ V to } 10\text{ V}$        | $V_O = 1.4\text{ V}$                        | 0°C           |                               | 60          | 94  | dB                           |
|                                                                            |          |                                              |                                             | 25°C          |                               | 65          | 95  |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 60          | 96  |                              |
| $I_{DD}$ Supply current (four amplifiers)                                  |          | $V_O = 2.5\text{ V}$ ,<br>No load            | $V_{IC} = 2.5\text{ V}$                     | 0°C           |                               | 3.1         | 7.2 | mA                           |
|                                                                            |          |                                              |                                             | 25°C          |                               | 2.7         | 6.4 |                              |
|                                                                            |          |                                              |                                             | 70°C          |                               | 2.3         | 5.2 |                              |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 10$  V (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                                                                                     |                                                                                                     | T <sub>A</sub> <sup>†</sup> | TLC254C, TLC254AC, TLC254BC |             |       | UNIT |
|------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|-------|------|
|                  |                                                                      |                                                                                                     |                                                                                                     |                             | MIN                         | TYP         | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | TLC254C                                                                                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 10 kΩ | 25°C                        | 1.1                         | 10          | mV    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | Full range                  | 12                          |             |       |      |
|                  | TLC254AC                                                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 10 kΩ | 25°C                                                                                                | 0.9                         | 5                           |             |       |      |
|                  |                                                                      |                                                                                                     | Full range                                                                                          | 6.5                         |                             |             |       |      |
|                  | TLC254BC                                                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 10 kΩ | 25°C                                                                                                | 0.39                        | 2                           |             |       |      |
|                  |                                                                      |                                                                                                     | Full range                                                                                          | 3                           |                             |             |       |      |
| °V <sub>IO</sub> | Average temperature coefficient of input offset voltage              |                                                                                                     |                                                                                                     | 25°C to 70°C                | 2                           |             | μV/°C |      |
| I <sub>IO</sub>  | Input offset current (see Note 4)                                    | V <sub>O</sub> = 5 V,                                                                               | V <sub>IC</sub> = 5 V                                                                               | 25°C                        | 0.1                         | 60          | pA    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 7                           | 300         |       |      |
| I <sub>IB</sub>  | Input bias current (see Note 4)                                      | V <sub>O</sub> = 5 V,                                                                               | V <sub>IC</sub> = 5 V                                                                               | 25°C                        | 0.7                         | 60          | pA    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 50                          | 600         |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range (see Note 5)                         |                                                                                                     |                                                                                                     | 25°C                        | −0.2 to 9                   | −0.3 to 9.2 | V     |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | Full range                  | −0.2 to 8.5                 |             |       |      |
| V <sub>OH</sub>  | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,                                                                           | R <sub>L</sub> = 10 kΩ                                                                              | 0°C                         | 7.8                         | 8.5         | V     |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 8                           | 8.5         |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 7.8                         | 8.4         |       |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,                                                                          | I <sub>OL</sub> = 0                                                                                 | 0°C                         | 0                           | 50          | mV    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 0                           | 50          |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 0                           | 50          |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>O</sub> = 1 V to 6 V,                                                                        | R <sub>L</sub> = 10 kΩ                                                                              | 0°C                         | 7.5                         | 42          | V/mV  |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 10                          | 36          |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 7.5                         | 32          |       |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                               |                                                                                                     | 0°C                         | 60                          | 88          | dB    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 65                          | 85          |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 60                          | 88          |       |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V,                                                                      | V <sub>O</sub> = 1.4 V                                                                              | 0°C                         | 60                          | 94          | dB    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 65                          | 95          |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 60                          | 96          |       |      |
| I <sub>DD</sub>  | Supply current (four amplifiers)                                     | V <sub>O</sub> = 5 V,<br>No load                                                                    | V <sub>IC</sub> = 5 V,                                                                              | 0°C                         | 4.5                         | 8.8         | mA    |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 25°C                        | 3.8                         | 8           |       |      |
|                  |                                                                      |                                                                                                     |                                                                                                     | 70°C                        | 3.2                         | 6.8         |       |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**operating characteristics,  $V_{DD} = 5\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                    | $T_A$                                            | TLC254C, TLC254AC,<br>TLC254BC |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------|--------------------------------------------------|--------------------------------|-----|-----|------------------------|
|                                         |                                                                    |                                                  | MIN                            | TYP | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 10\text{ k}\Omega$ , $C_L = 20\text{ pF}$ ,<br>See Figure 1 | $V_{I(PP)} = 1\text{ V}$                         | 0°C                            | 4   |     | V/ $\mu$ s             |
|                                         |                                                                    |                                                  | 25°C                           | 3.6 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 3   |     |                        |
|                                         |                                                                    | $V_{I(PP)} = 2.5\text{ V}$                       | 0°C                            | 3.1 |     |                        |
|                                         |                                                                    |                                                  | 25°C                           | 2.9 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 2.5 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,<br>See Figure 2    | 25°C                                             |                                | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1                                   | $C_L = 20\text{ pF}$ , $R_L = 10\text{ k}\Omega$ | 0°C                            | 340 |     | kHz                    |
|                                         |                                                                    |                                                  | 25°C                           | 320 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 260 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,<br>See Figure 1      |                                                  | 0°C                            | 2   |     | MHz                    |
|                                         |                                                                    |                                                  | 25°C                           | 1.7 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 1.3 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3                             | $f = B_1$ , $C_L = 20\text{ pF}$                 | 0°C                            | 47° |     |                        |
|                                         |                                                                    |                                                  | 25°C                           | 46° |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 43° |     |                        |

**operating characteristics,  $V_{DD} = 10\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                    | $T_A$                                            | TLC254C, TLC254AC,<br>TLC254BC |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------|--------------------------------------------------|--------------------------------|-----|-----|------------------------|
|                                         |                                                                    |                                                  | MIN                            | TYP | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 10\text{ k}\Omega$ , $C_L = 20\text{ pF}$ ,<br>See Figure 1 | $V_{I(PP)} = 1\text{ V}$                         | 0°C                            | 5.9 |     | V/ $\mu$ s             |
|                                         |                                                                    |                                                  | 25°C                           | 5.3 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 4.3 |     |                        |
|                                         |                                                                    | $V_{I(PP)} = 5.5\text{ V}$                       | 0°C                            | 5.1 |     |                        |
|                                         |                                                                    |                                                  | 25°C                           | 4.6 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 3.8 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,<br>See Figure 2    | 25°C                                             |                                | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1                                   | $C_L = 20\text{ pF}$ , $R_L = 10\text{ k}\Omega$ | 0°C                            | 220 |     | kHz                    |
|                                         |                                                                    |                                                  | 25°C                           | 200 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 140 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,<br>See Figure 1      |                                                  | 0°C                            | 2.5 |     | MHz                    |
|                                         |                                                                    |                                                  | 25°C                           | 2.2 |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 1.8 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3                             | $f = B_1$ , $C_L = 20\text{ pF}$                 | 0°C                            | 50° |     |                        |
|                                         |                                                                    |                                                  | 25°C                           | 49° |     |                        |
|                                         |                                                                    |                                                  | 70°C                           | 46° |     |                        |

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                                       |                                                                                                    | T <sub>A</sub> <sup>†</sup> | TLC25L4C<br>TLC25L4AC<br>TLC25L4BC |             |       | UNIT |
|------------------|----------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------|------------------------------------|-------------|-------|------|
|                  |                                                                      |                                                       |                                                                                                    |                             | MIN                                | TYP         | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | TLC25L4C                                              | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 1.1                                | 10          | mV    |      |
|                  |                                                                      |                                                       |                                                                                                    | Full range                  |                                    | 12          |       |      |
|                  |                                                                      | TLC25L4AC                                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 0.9                                | 5           |       |      |
|                  |                                                                      |                                                       |                                                                                                    | Full range                  |                                    | 6.5         |       |      |
|                  |                                                                      | TLC25L4BC                                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 0.24                               | 2           |       |      |
|                  |                                                                      |                                                       |                                                                                                    | Full range                  |                                    | 3           |       |      |
| °V <sub>IO</sub> | Average temperature coefficient of input offset voltage              |                                                       |                                                                                                    | 25°C to 70°C                | 1.1                                |             | μV/°C |      |
| I <sub>IO</sub>  | Input offset current (see Note 4)                                    | V <sub>O</sub> = 2.5 V,                               | V <sub>IC</sub> = 2.5 V                                                                            | 25°C                        | 0.1                                | 60          | pA    |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 7                                  | 300         |       |      |
| I <sub>IB</sub>  | Input bias current (see Note 4)                                      | V <sub>O</sub> = 2.5 V,                               | V <sub>IC</sub> = 2.5 V                                                                            | 25°C                        | 0.6                                | 60          | pA    |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 40                                 | 600         |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range (see Note 5)                         |                                                       |                                                                                                    | 25°C                        | −0.2 to 4                          | −0.3 to 4.2 | V     |      |
|                  |                                                                      |                                                       |                                                                                                    | Full range                  | −0.2 to 3.5                        |             | V     |      |
| V <sub>OH</sub>  | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,                             | R <sub>L</sub> = 1 MΩ                                                                              | 0°C                         | 3                                  | 4.1         | V     |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 3.2                                | 4.1         |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 3                                  | 4.2         |       |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,                            | I <sub>OL</sub> = 0                                                                                | 0°C                         | 0                                  | 50          | mV    |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 0                                  | 50          |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 0                                  | 50          |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>O</sub> = 0.25 V to 2 V, R <sub>L</sub> = 1 MΩ |                                                                                                    | 0°C                         | 50                                 | 680         | V/mV  |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 50                                 | 520         |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 50                                 | 380         |       |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                 |                                                                                                    | 0°C                         | 60                                 | 95          | dB    |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 65                                 | 94          |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 60                                 | 95          |       |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V, V <sub>O</sub> = 1.4 V |                                                                                                    | 0°C                         | 60                                 | 97          | dB    |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 70                                 | 98          |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 60                                 | 97          |       |      |
| I <sub>DD</sub>  | Supply current (four amplifiers)                                     | V <sub>O</sub> = 2.5 V,<br>No load                    | V <sub>IC</sub> = 2.5 V,                                                                           | 0°C                         | 48                                 | 84          | μA    |      |
|                  |                                                                      |                                                       |                                                                                                    | 25°C                        | 40                                 | 68          |       |      |
|                  |                                                                      |                                                       |                                                                                                    | 70°C                        | 31                                 | 56          |       |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                                            |                                                                                                    | T <sub>A</sub> <sup>†</sup> | TLC25L4C<br>TLC25L4AC<br>TLC25L4BC |      |       | UNIT |
|------------------|----------------------------------------------------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------|------------------------------------|------|-------|------|
|                  |                                                                      |                                                            |                                                                                                    |                             | MIN                                | TYP  | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | TLC25L4C                                                   | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 1.1                                | 10   | mV    |      |
|                  |                                                                      |                                                            |                                                                                                    | Full range                  |                                    | 12   |       |      |
|                  |                                                                      | TLC25L4AC                                                  | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 0.9                                | 5    |       |      |
|                  |                                                                      |                                                            |                                                                                                    | Full range                  |                                    | 6.5  |       |      |
|                  |                                                                      | TLC25L4BC                                                  | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 0.26                               | 2    |       |      |
|                  |                                                                      |                                                            |                                                                                                    | Full range                  |                                    | 3    |       |      |
| α <sub>VIO</sub> | Average temperature coefficient of input offset voltage              |                                                            |                                                                                                    | 25°C to 70°C                | 1                                  |      | μV/°C |      |
| I <sub>IO</sub>  | Input offset current (see Note 4)                                    | V <sub>O</sub> = 5 V,<br>V <sub>IC</sub> = 5 V             | 25°C                                                                                               | 0.1                         | 60                                 | pA   |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 7                           | 300                                |      |       |      |
| I <sub>IB</sub>  | Input bias current (see Note 4)                                      | V <sub>O</sub> = 5 V,<br>V <sub>IC</sub> = 5 V             | 25°C                                                                                               | 0.7                         | 60                                 | pA   |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 50                          | 600                                |      |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range (see Note 5)                         |                                                            | 25°C                                                                                               | −0.2 to 9                   | −0.3 to 9.2                        | V    |       |      |
|                  |                                                                      |                                                            | Full range                                                                                         | −0.2 to 8.5                 |                                    | V    |       |      |
| V <sub>OH</sub>  | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 1 MΩ         | 0°C                                                                                                | 7.8                         | 8.9                                | V    |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 8                           | 8.9                                |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 7.8                         | 8.9                                |      |       |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0          | 0°C                                                                                                | 0                           | 50                                 | mV   |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 0                           | 50                                 |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 0                           | 50                                 |      |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>O</sub> = 1 V to 6 V,<br>R <sub>L</sub> = 1 MΩ      | 0°C                                                                                                | 50                          | 1025                               | V/mV |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 50                          | 870                                |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 50                          | 660                                |      |       |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                      | 0°C                                                                                                | 60                          | 97                                 | dB   |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 65                          | 97                                 |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 60                          | 97                                 |      |       |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V,<br>V <sub>O</sub> = 1.4 V   | 0°C                                                                                                | 60                          | 97                                 | dB   |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 70                          | 97                                 |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 60                          | 98                                 |      |       |      |
| I <sub>DD</sub>  | Supply current (four amplifiers)                                     | V <sub>O</sub> = 5 V,<br>No load<br>V <sub>IC</sub> = 5 V, | 0°C                                                                                                | 72                          | 132                                | μA   |       |      |
|                  |                                                                      |                                                            | 25°C                                                                                               | 57                          | 92                                 |      |       |      |
|                  |                                                                      |                                                            | 70°C                                                                                               | 44                          | 80                                 |      |       |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**operating characteristics,  $V_{DD} = 5\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                    | $T_A$                      | TLC25L4C<br>TLC25L4AC<br>TLC25L4BC |      |     | UNIT                   |
|-----------------------------------------|------------------------------------------------------------------------------------|----------------------------|------------------------------------|------|-----|------------------------|
|                                         |                                                                                    |                            | MIN                                | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>See Figure 1 $C_L = 20\text{ pF}$                    | $V_{I(PP)} = 1\text{ V}$   | 0°C                                | 0.04 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                    |                            | 25°C                               | 0.03 |     |                        |
|                                         |                                                                                    |                            | 70°C                               | 0.03 |     |                        |
|                                         |                                                                                    | $V_{I(PP)} = 2.5\text{ V}$ | 0°C                                | 0.03 |     |                        |
|                                         |                                                                                    |                            | 25°C                               | 0.03 |     |                        |
|                                         |                                                                                    |                            | 70°C                               | 0.02 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,      See Figure 2                  | 25°C                       |                                    | 70   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1 $C_L = 20\text{ pF}$ , $R_L = 1\text{ M}\Omega$ , | 0°C                        |                                    | 6    |     | kHz                    |
|                                         |                                                                                    | 25°C                       |                                    | 5    |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 4.5  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,      See Figure 1                    | 0°C                        |                                    | 100  |     | kHz                    |
|                                         |                                                                                    | 25°C                       |                                    | 85   |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 65   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3 $f = B_1$ , $C_L = 20\text{ pF}$ ,          | 0°C                        |                                    | 36°  |     |                        |
|                                         |                                                                                    | 25°C                       |                                    | 34°  |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 30°  |     |                        |

**operating characteristics,  $V_{DD} = 10\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                    | $T_A$                      | TLC25L4C<br>TLC25L4AC<br>TLC25L4BC |      |     | UNIT                   |
|-----------------------------------------|------------------------------------------------------------------------------------|----------------------------|------------------------------------|------|-----|------------------------|
|                                         |                                                                                    |                            | MIN                                | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>See Figure 1 $C_L = 20\text{ pF}$                    | $V_{I(PP)} = 1\text{ V}$   | 0°C                                | 0.05 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                    |                            | 25°C                               | 0.05 |     |                        |
|                                         |                                                                                    |                            | 70°C                               | 0.04 |     |                        |
|                                         |                                                                                    | $V_{I(PP)} = 5.5\text{ V}$ | 0°C                                | 0.05 |     |                        |
|                                         |                                                                                    |                            | 25°C                               | 0.04 |     |                        |
|                                         |                                                                                    |                            | 70°C                               | 0.04 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,      See Figure 2                  | 25°C                       |                                    | 70   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1 $C_L = 20\text{ pF}$ , $R_L = 1\text{ M}\Omega$ , | 0°C                        |                                    | 1.3  |     | kHz                    |
|                                         |                                                                                    | 25°C                       |                                    | 1    |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 0.9  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,      See Figure 1                    | 0°C                        |                                    | 125  |     | kHz                    |
|                                         |                                                                                    | 25°C                       |                                    | 110  |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 90   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3 $f = B_1$ , $C_L = 20\text{ pF}$ ,          | 0°C                        |                                    | 40°  |     |                        |
|                                         |                                                                                    | 25°C                       |                                    | 38°  |     |                        |
|                                         |                                                                                    | 70°C                       |                                    | 34°  |     |                        |



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B**  
**TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y**  
**LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                       |                                                   | T <sub>A</sub> <sup>†</sup>                     | TLC25M4C<br>TLC25M4AC<br>TLC25M4BC |                   |       | UNIT |
|------------------|----------------------------------------------------------------------|---------------------------------------|---------------------------------------------------|-------------------------------------------------|------------------------------------|-------------------|-------|------|
|                  |                                                                      |                                       |                                                   |                                                 | MIN                                | TYP               | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | TLC25M4C                              | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 1.1               | 10    | mV   |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |                   | 12    |      |
|                  |                                                                      | TLC25M4AC                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 0.9               | 5     |      |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |                   | 6.5   |      |
|                  |                                                                      | TLC25M4BC                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 0.25              | 2     |      |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |                   | 3     |      |
| °V <sub>IO</sub> | Average temperature coefficient of input offset voltage              |                                       |                                                   | 25°C to 70°C                                    | 1.7                                |                   | μV/°C |      |
| I <sub>IO</sub>  | Input offset current (see Note 4)                                    | V <sub>O</sub> = 2.5 V,               | V <sub>IC</sub> = 2.5 V                           | 25°C                                            | 0.1                                | 60                | pA    |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 7                                  | 300               |       |      |
| I <sub>IB</sub>  | Input bias current (see Note 4)                                      | V <sub>O</sub> = 2.5 V,               | V <sub>IC</sub> = 2.5 V                           | 25°C                                            | 0.6                                | 60                | pA    |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 40                                 | 600               |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range (see Note 5)                         |                                       |                                                   | 25°C                                            | −0.2<br>to<br>4                    | −0.3<br>to<br>4.2 | V     |      |
|                  |                                                                      |                                       |                                                   | Full range                                      | −0.2<br>to<br>3.5                  |                   | V     |      |
| V <sub>OH</sub>  | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,             | R <sub>L</sub> = 100 kΩ                           | 0°C                                             | 3                                  | 3.9               | V     |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 3.2                                | 3.9               |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 3                                  | 4                 |       |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,            | I <sub>OL</sub> = 0                               | 0°C                                             | 0                                  | 50                | mV    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 0                                  | 50                |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 0                                  | 50                |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>O</sub> = 0.25 V to 2 V,       | R <sub>L</sub> = 100 kΩ                           | 0°C                                             | 15                                 | 200               | V/mV  |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 25                                 | 170               |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 15                                 | 140               |       |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub> |                                                   | 0°C                                             | 60                                 | 91                | dB    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 65                                 | 91                |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 60                                 | 92                |       |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V,        | V <sub>O</sub> = 1.4 V                            | 0°C                                             | 60                                 | 92                | dB    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 70                                 | 93                |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 60                                 | 94                |       |      |
| I <sub>DD</sub>  | Supply current (four amplifiers)                                     | V <sub>O</sub> = 2.5 V,<br>No load    | V <sub>IC</sub> = 2.5 V,                          | 0°C                                             | 500                                | 1280              | μA    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 420                                | 1120              |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 340                                | 880               |       |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 10$  V (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                       |                                                   | T <sub>A</sub> <sup>†</sup>                     | TLC25M4C<br>TLC25M4AC<br>TLC25M4BC |             |       | UNIT |
|------------------|----------------------------------------------------------------------|---------------------------------------|---------------------------------------------------|-------------------------------------------------|------------------------------------|-------------|-------|------|
|                  |                                                                      |                                       |                                                   |                                                 | MIN                                | TYP         | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | TLC25M4C                              | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 1.1         | 10    | mV   |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |             | 12    |      |
|                  |                                                                      | TLC25M4AC                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 0.9         | 5     |      |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |             | 6.5   |      |
|                  |                                                                      | TLC25M4BC                             | V <sub>O</sub> = 1.4 V,<br>R <sub>S</sub> = 50 Ω, | V <sub>IC</sub> = 0,<br>R <sub>L</sub> = 100 kΩ | 25°C                               | 0.26        | 2     |      |
|                  |                                                                      |                                       |                                                   |                                                 | Full range                         |             | 3     |      |
| α <sub>VIO</sub> | Average temperature coefficient of input offset voltage              |                                       |                                                   | 25°C to 70°C                                    | 2.1                                |             | μV/°C |      |
| I <sub>IO</sub>  | Input offset current (see Note 4)                                    | V <sub>O</sub> = 5 V,                 | V <sub>IC</sub> = 5 V                             | 25°C                                            | 0.1                                | 60          | pA    |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 7                                  | 300         |       |      |
| I <sub>IB</sub>  | Input bias current (see Note 4)                                      | V <sub>O</sub> = 5 V,                 | V <sub>IC</sub> = 5 V                             | 25°C                                            | 0.7                                | 60          | pA    |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 50                                 | 600         |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range (see Note 5)                         |                                       |                                                   | 25°C                                            | −0.2 to 9                          | −0.3 to 9.2 | V     |      |
|                  |                                                                      |                                       |                                                   | Full range                                      | −0.2 to 8.5                        |             | V     |      |
| V <sub>OH</sub>  | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,             | R <sub>L</sub> = 100 kΩ                           | 0°C                                             | 7.8                                | 8.7         | V     |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 8                                  | 8.7         |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 7.8                                | 8.7         |       |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,            | I <sub>OL</sub> = 0                               | 0°C                                             | 0                                  | 50          | mV    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 0                                  | 50          |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 0                                  | 50          |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>O</sub> = 1 V to 6 V,          | R <sub>L</sub> = 100 kΩ                           | 0°C                                             | 15                                 | 320         | V/mV  |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 25                                 | 275         |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 15                                 | 230         |       |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub> |                                                   | 0°C                                             | 60                                 | 94          | dB    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 65                                 | 94          |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 60                                 | 94          |       |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V,        | V <sub>O</sub> = 1.4 V                            | 0°C                                             | 60                                 | 92          | dB    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 70                                 | 93          |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 60                                 | 94          |       |      |
| I <sub>DD</sub>  | Supply current (four amplifiers)                                     | V <sub>O</sub> = 5 V,<br>No load      | V <sub>IC</sub> = 5 V,                            | 0°C                                             | 690                                | 1600        | μA    |      |
|                  |                                                                      |                                       |                                                   | 25°C                                            | 570                                | 1200        |       |      |
|                  |                                                                      |                                       |                                                   | 70°C                                            | 440                                | 1120        |       |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**operating characteristics,  $V_{DD} = 5\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                      | $T_A$                      | TLC25M4C<br>TLC25M4AC<br>TLC25M4BC |      |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------|----------------------------|------------------------------------|------|-----|------------------------|
|                                         |                                                                                      |                            | MIN                                | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>See Figure 1 $C_L = 20\text{ pF}$                    | $V_{I(PP)} = 1\text{ V}$   | 0°C                                | 0.46 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                      |                            | 25°C                               | 0.43 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                      |                            | 70°C                               | 0.36 |     |                        |
|                                         |                                                                                      | $V_{I(PP)} = 2.5\text{ V}$ | 0°C                                | 0.43 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                      |                            | 25°C                               | 0.40 |     |                        |
|                                         |                                                                                      |                            | 70°C                               | 0.34 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,      See Figure 2                    | 25°C                       |                                    | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1 $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$ , | 0°C                        |                                    | 60   |     | kHz                    |
|                                         |                                                                                      | 25°C                       |                                    | 55   |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 50   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,      See Figure 1                      | 0°C                        |                                    | 610  |     | kHz                    |
|                                         |                                                                                      | 25°C                       |                                    | 525  |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 400  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3 $f = B_1$ , $C_L = 20\text{ pF}$ ,            | 0°C                        |                                    | 41°  |     |                        |
|                                         |                                                                                      | 25°C                       |                                    | 40°  |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 39°  |     |                        |

**operating characteristics,  $V_{DD} = 10\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                      | $T_A$                      | TLC25M4C<br>TLC25M4AC<br>TLC25M4BC |      |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------|----------------------------|------------------------------------|------|-----|------------------------|
|                                         |                                                                                      |                            | MIN                                | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>See Figure 1 $C_L = 20\text{ pF}$                    | $V_{I(PP)} = 1\text{ V}$   | 0°C                                | 0.67 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                      |                            | 25°C                               | 0.62 |     |                        |
|                                         |                                                                                      |                            | 70°C                               | 0.51 |     |                        |
|                                         |                                                                                      | $V_{I(PP)} = 5.5\text{ V}$ | 0°C                                | 0.61 |     |                        |
|                                         |                                                                                      |                            | 25°C                               | 0.56 |     |                        |
|                                         |                                                                                      |                            | 70°C                               | 0.46 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$ ,      See Figure 2                    | 25°C                       |                                    | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>See Figure 1 $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$ , | 0°C                        |                                    | 40   |     | kHz                    |
|                                         |                                                                                      | 25°C                       |                                    | 35   |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 30   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ ,      See Figure 1                      | 0°C                        |                                    | 710  |     | kHz                    |
|                                         |                                                                                      | 25°C                       |                                    | 635  |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 510  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>See Figure 3 $f = B_1$ , $C_L = 20\text{ pF}$ ,            | 0°C                        |                                    | 44°  |     |                        |
|                                         |                                                                                      | 25°C                       |                                    | 43°  |     |                        |
|                                         |                                                                                      | 70°C                       |                                    | 42°  |     |                        |

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

**electrical characteristics,  $V_{DD} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                         | TLC254Y         |                   |     | TLC25L4Y        |                   |       | TLC25M4Y        |                   |      | UNIT                         |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------|-------------------|-----|-----------------|-------------------|-------|-----------------|-------------------|------|------------------------------|
|                                                                            |                                                                                         | MIN             | TYP               | MAX | MIN             | TYP               | MAX   | MIN             | TYP               | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_O = 1.4\text{ V}$ ,<br>$V_{IC} = 0\text{ V}$ ,<br>$R_S = 50\ \Omega$ ,<br>See Note 6 |                 | 1.1               | 10  |                 | 1.1               | 10    |                 | 1.1               | 10   | mV                           |
| $\alpha_{VIO}$ Average temperature coefficient of input offset voltage     |                                                                                         |                 | 1.8               |     |                 | 1.1               |       |                 | 1.7               |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current (see Note 4)                                 | $V_O = V_{DD}/2$ ,<br>$V_{IC} = V_{DD}/2$                                               |                 | 0.1               | 60  |                 | 0.1               | 60    |                 | 0.1               | 60   | pA                           |
| $I_{IB}$ Input bias current (see Note 4)                                   | $V_O = V_{DD}/2$ ,<br>$V_{IC} = V_{DD}/2$                                               |                 | 0.6               | 60  |                 | 0.6               | 60    |                 | 0.6               | 60   | pA                           |
| $V_{ICR}$ Common-mode input voltage range (see Note 5)                     |                                                                                         | –0.2<br>to<br>4 | –0.3<br>to<br>4.2 |     | –0.2<br>to<br>4 | –0.3<br>to<br>4.2 |       | –0.2<br>to<br>4 | –0.3<br>to<br>4.2 |      | V                            |
| $V_{OH}$ High-level output voltage                                         | $V_{ID} = 100\text{ mV}$ ,<br>$R_L = 100\text{ k}\Omega$                                | 3.2             | 3.8               |     | 3.2             | 4.1               |       | 3.2             | 3.9               |      | V                            |
| $V_{OL}$ Low-level output voltage                                          | $V_{ID} = -100\text{ mV}$ ,<br>$I_{OL} = 0$                                             |                 | 0                 | 50  |                 | 0                 | 50    |                 | 0                 | 50   | mV                           |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_O = 0.25\text{ V}$ ,<br>See Note 6                                                   | 5               | 23                |     | 50              | 520               |       | 25              | 170               |      | V/mV                         |
| CMRR Common-mode rejection ratio                                           | $V_{IC} = V_{ICRmin}$                                                                   | 65              | 80                |     | 65              | 94                |       | 65              | 91                |      | dB                           |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 5\text{ V to }10\text{ V}$ ,<br>$V_O = 1.4\text{ V}$                          | 65              | 95                |     | 70              | 97                |       | 70              | 93                |      | dB                           |
| $I_{DD}$ Supply current                                                    | $V_O = V_{DD}/2$ ,<br>$V_{IC} = V_{DD}/2$ ,<br>No load                                  |                 | 2.7               | 6.4 |                 | 0.04              | 0.068 |                 | 0.42              | 1.12 | mA                           |

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. For low-bias mode,  $R_L = 1\text{ M}\Omega$ , for medium-bias mode,  $R_L = 100\text{ k}\Omega$ , and for high-bias mode,  $R_L = 10\text{ k}\Omega$ .

**operating characteristics,  $V_{DD} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER                               | TEST CONDITIONS                                |                          | TLC254Y |     |     | TLC25L4Y |       |     | TLC25M4Y |       |     | UNIT                   |
|-----------------------------------------|------------------------------------------------|--------------------------|---------|-----|-----|----------|-------|-----|----------|-------|-----|------------------------|
|                                         |                                                |                          | MIN     | TYP | MAX | MIN      | TYP   | MAX | MIN      | TYP   | MAX |                        |
| SR Slew rate at unity gain              | $C_L = 20\text{ pF}$ ,<br>See Note 6           | $V_I(PP) = 1\text{ V}$   |         | 3.6 |     |          | 0.03  |     |          | 0.43  |     | V/ $\mu\text{s}$       |
|                                         |                                                | $V_I(PP) = 2.5\text{ V}$ |         | 2.9 |     |          | 0.03  |     |          | 0.40  |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>$R_S = 20\ \Omega$     |                          |         | 2.5 |     |          | 70    |     |          | 32    |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$  | $C_L = 20\text{ pF}$     |         | 320 |     |          | 5     |     |          | 55    |     | kHz                    |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ |                          |         | 1.7 |     |          | 0.085 |     |          | 0.525 |     | MHz                    |
| $\phi_m$ Phase margin                   | $f = B_1$ ,<br>$C_L = 20\text{ pF}$            | $V_I = 10\text{ mV}$     |         | 46° |     |          | 34°   |     |          | 40°   |     |                        |

NOTE 6: For low-bias mode,  $R_L = 1\text{ M}\Omega$ , for medium-bias mode,  $R_L = 100\text{ k}\Omega$ , and for high-bias mode,  $R_L = 10\text{ k}\Omega$ .



## PARAMETER MEASUREMENT INFORMATION

### single-supply versus split-supply test circuits

Because the TLC25\_4, TLC25\_4A, and TLC25\_4B are optimized for single-supply operation, circuit configurations used for the various tests often present some inconvenience since the input signal, in many cases, must be offset from ground. This inconvenience can be avoided by testing the device with split supplies and the output load tied to the negative rail. A comparison of single-supply versus split-supply test circuits is shown below. The use of either circuit gives the same result.

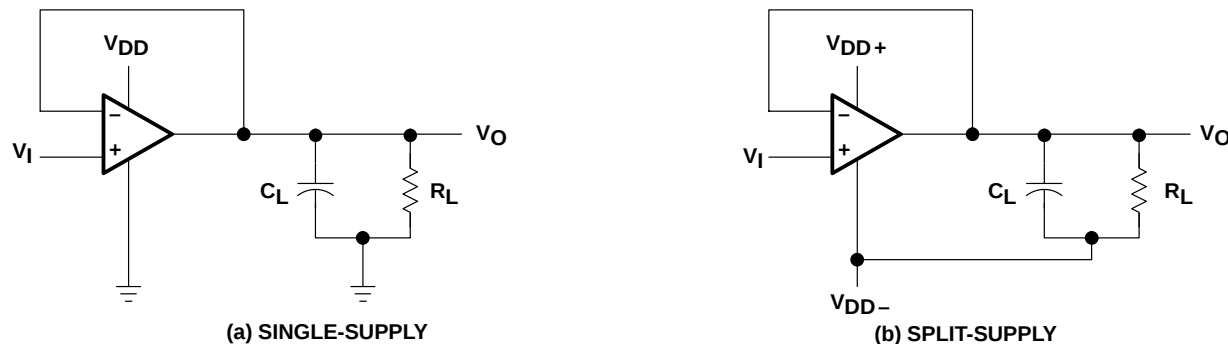


Figure 1. Unity-Gain Amplifier

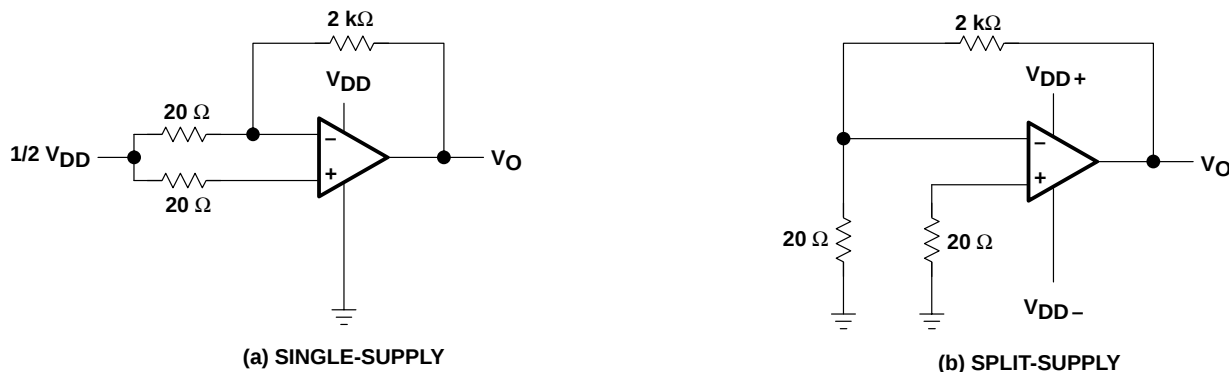


Figure 2. Noise-Test Circuit

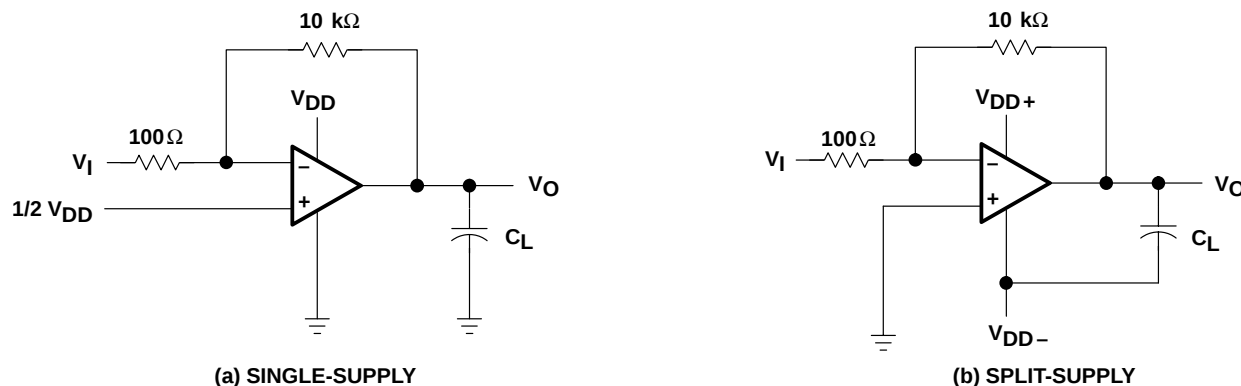


Figure 3. Gain-of-100 Inverting Amplifier

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B  
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y  
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003G – JUNE 1983 – REVISED MARCH 2001

## TYPICAL CHARACTERISTICS

Table of Graphs

|          |                                                 |                          | FIGURE |
|----------|-------------------------------------------------|--------------------------|--------|
| $I_{DD}$ | Supply current                                  | vs Supply voltage        | 4      |
|          |                                                 | vs Free-air temperature  | 5      |
| $A_{VD}$ | Large-signal differential voltage amplification | Low bias vs Frequency    | 6      |
|          |                                                 | Medium bias vs Frequency | 7      |
|          |                                                 | High bias vs Frequency   | 8      |
|          | Phase shift                                     | Low bias vs Frequency    | 6      |
|          |                                                 | Medium bias vs Frequency | 7      |
|          |                                                 | High bias vs Frequency   | 8      |

**SUPPLY CURRENT  
vs  
SUPPLY VOLTAGE**

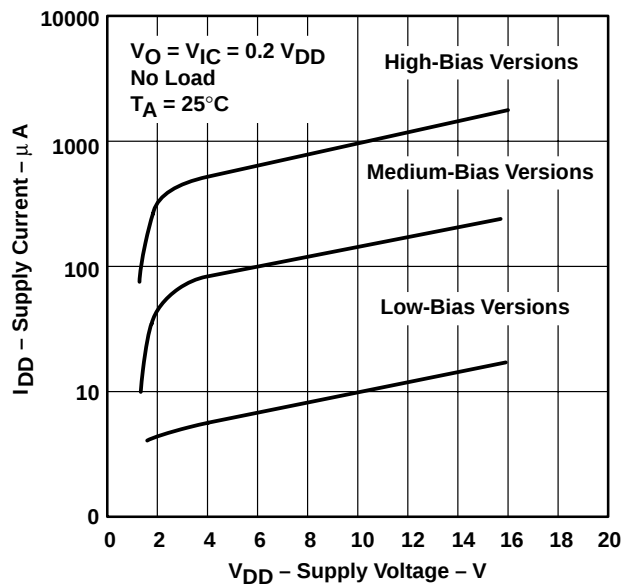


Figure 4

**SUPPLY CURRENT  
vs  
FREE-AIR TEMPERATURE**

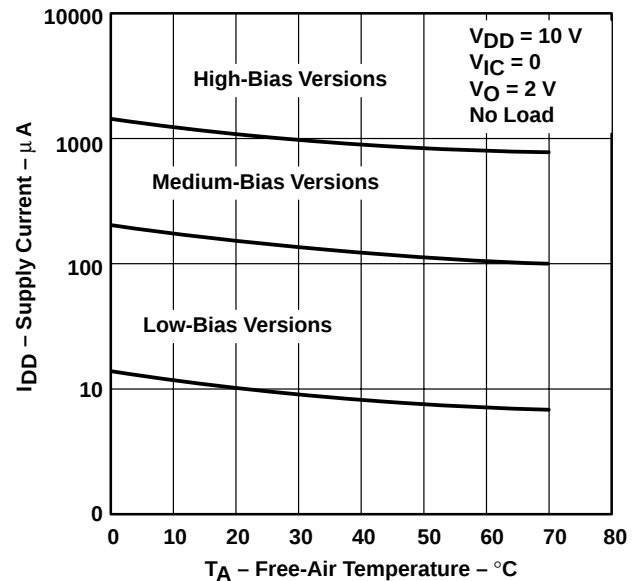


Figure 5

## TYPICAL CHARACTERISTICS

### LOW-BIAS LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

VS  
FREQUENCY

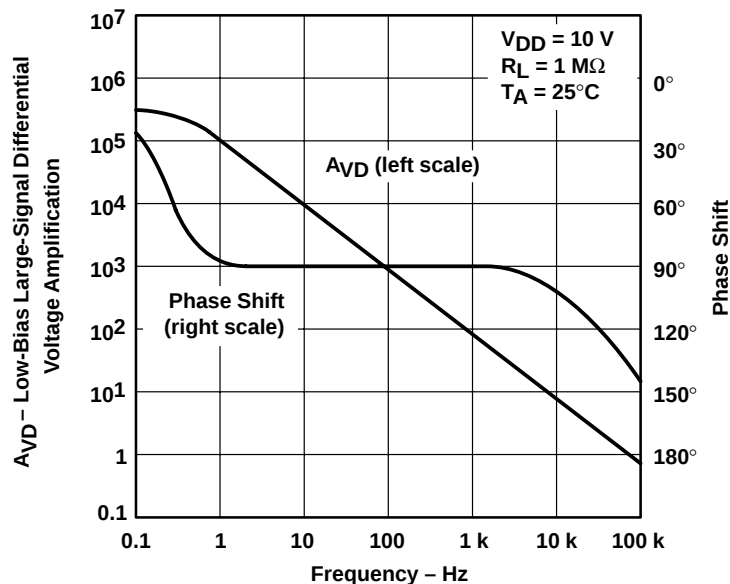


Figure 6

### MEDIUM-BIAS LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

VS  
FREQUENCY

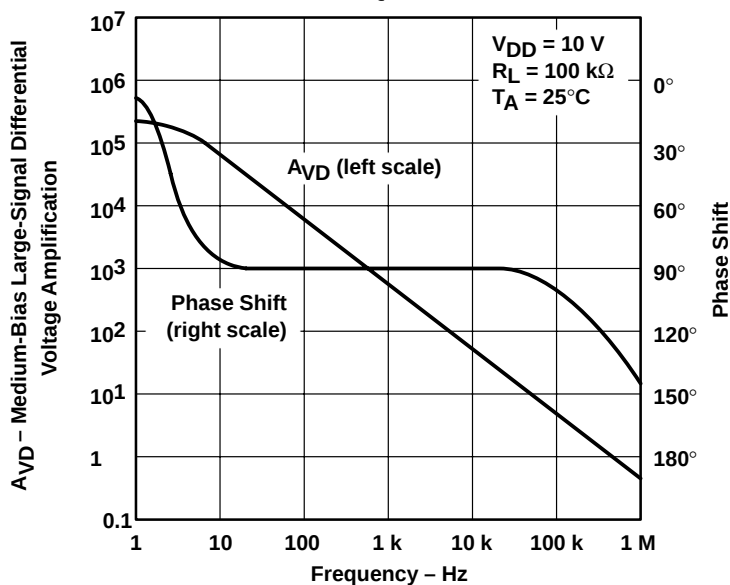


Figure 7

# TYPICAL CHARACTERISTICS

## HIGH-BIAS LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT VS FREQUENCY

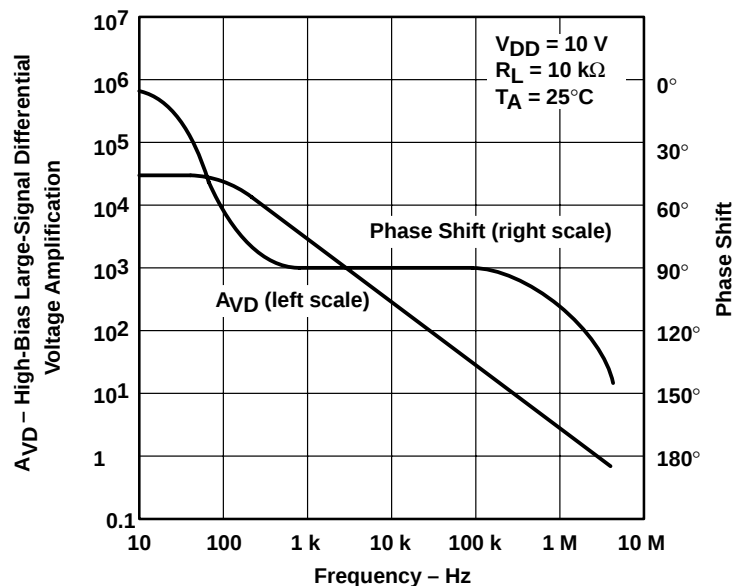


Figure 8

## **APPLICATION INFORMATION**

### **latch-up avoidance**

Junction-isolated CMOS circuits have an inherent parasitic PNP structure that can function as an SCR. Under certain conditions, this SCR may be triggered into a low-impedance state, resulting in excessive supply current. To avoid such conditions, no voltage greater than 0.3 V beyond the supply rails should be applied to any pin. In general, the operational amplifiers supplies should be established simultaneously with, or before, application of any input signals.

### **output stage considerations**

The amplifier's output stage consists of a source-follower-connected pullup transistor and an open-drain pulldown transistor. The high-level output voltage ( $V_{OH}$ ) is virtually independent of the  $I_{DD}$  selection and increases with higher values of  $V_{DD}$  and reduced output loading. The low-level output voltage ( $V_{OL}$ ) decreases with reduced output current and higher input common-mode voltage. With no load,  $V_{OL}$  is essentially equal to the potential of  $V_{DD-}/GND$ .

### **supply configurations**

Even though the TLC25\_4C series is characterized for single-supply operation, they can be used effectively in a split-supply configuration if the input common-mode voltage ( $V_{ICR}$ ), output swing ( $V_{OL}$  and  $V_{OH}$ ), and supply voltage limits are not exceeded.

### **circuit layout precautions**

Whenever extremely high circuit impedances are used, care must be exercised in layout, construction, board cleanliness, and supply filtering to avoid hum and noise pickup as well as excessive dc leakages.

## IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: Standard Terms and Conditions of Sale for Semiconductor Products. [www.ti.com/sc/docs/stdterms.htm](http://www.ti.com/sc/docs/stdterms.htm)

### Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265